Compositional Assume-Guarantee Reasoning of Control Law Diagrams using UTP

Kangfeng Ye Simon Foster
Jim Woodcock
University of York, UK

{kangfeng.ye,simon.foster,jim.woodcock}@york.ac.uk

April 23, 2018

Abstract

This report is a summary of our work for the VeTSS funded project "Mechanised Assume-Guarantee Reasoning for Control Law Diagrams via Circus". Our Assume-Guarantee (AG) reasoning of control law diagrams is based on Hoare and He's Unifying Theories of Programming and their theory of designs. In this report, we present developed theories and laws to map discrete-time Simulink block diagrams to designs in UTP, calculate assumptions and guarantees, and verify properties for modelled systems. A practical application of our AG reasoning to an aircraft cabin pressure control subsystem is also presented. In addition, all mechanised theories in Isabelle/UTP are attached in Appendices. In the end of this report, we summarise current progress for each work package.

Contents

1 Introduction

Control law diagrams such as Simulink [1] and OpenModelica [2] are widely used industrial languages and tool-sets for expressing control laws, including support for simulation and code generation. In particular, Simulink actually is a *de facto* standard in many areas in industry. Its model based design, simulation and code generation make it a very efficient and cost-effective way to develop complex systems. Though empirical analysis through simulation is an important technique to explore and refine models, only formal verification can make specific mathematical guarantees about behaviour, which is crucial to ensure safety of associated implementations. Whilst verification facilities for Simulink exist [3, 4, 5, 6, 7, 8], there is still a need for assertional reasoning techniques that capture the full range of specifiable behaviour, provide non-deterministic specification constructs, and support compositional verification. Such techniques also need to be sufficiently expressive to handle the plethora of additional languages and modelling notations that are used by industry in concert with Simulink, in order to allow formulation of heterogeneous "multi-models" that capture the different paradigms and disciplines used in large scale systems [9]. Applicable tool support for these techniques with a high degree of automation is also of vital importance to enable adoption by industry. Since Simulink diagrams are data rich and usually have an uncountably infinite state space, model checking alone is insufficient and there is a need for theorem proving facilities.

Assume-Guarantee (AG) reasoning is a valuable compositional verification technique for reactive systems [10, 11, 12]. In AG, one demonstrates composite system level properties by decompos-

ing them into a number of contracts for each component subsystem. Each contract specifies the guarantees that the subsystem will make about its behaviour, under certain specified assumptions of the subsystem's environment. Such a decomposition is vital in order to make verification of a complex system tractable, and to allow development of subsystems by separate teams. AG reasoning has previously been applied to verification of discrete time Simulink control law diagrams through mappings into synchronous languages like Lustre [13] and Kahn Process Networks [5]. However such formalisms, whilst theoretically and practically appealing, are limited to expressing processes that are inherently deterministic and non-terminating in nature. Refinement Calculus for Reactive Systems (RCRS) [8] is a methodology that can be applied to reason about non-deterministic and non-input-receptive systems by treating programs as predicate transformers. However, it is not able to reason about multi-rate Simulink diagrams and algebraic loops. Almost all these verification facilities translate Simulink to sequential languages, synchronous languages or reactive languages [7], and then use verification methods for these languages to reason about Simulink diagrams. There is a need to develop a reasoning technique that is based on the semantic understanding of simulation in Simulink as described in Section 2.1. Thus, it is necessary to translate to several additional notations where AG verification can be performed, which hampers both traceability and composition with other languages of different paradigms. What is needed is a rich unified language capable of AG reasoning, and supported by theorem proving, into which Simulink and associated notations can be losslessly translated.

Our proposed approach thus explores development of formal AG-based proof support for discrete-time Simulink diagrams through a semantic embedding of the theory of designs [14] in Unifying Theories of Programming (UTP) [15] in Isabelle/HOL [16] using our developed tool Isabelle/UTP [17]. Initially, we proposed to use *Circus* [18], a formal modelling language for concurrent and reactive systems in the style of CSP, to model Simulink diagrams as shown in [7], and then apply contract-based reasoning to *Circus*. A *Circus* model consists of a network of processes that communicate with one another solely via shared channels that carry typed data. Internal state variables are encapsulated and not directly observable by other parallel processes. *Circus* can capture a variety of languages at the semantic level, and thus supports the formulation of heterogeneous multi-models [9] by acting as a "lingua franca". In addition, a timed version of *Circus* is used to model multi-rate diagrams. However, a *Circus* model has more complex information of blocks in Simulink for AG reasoning. For example, the corresponding *Circus* process for a block uses channels to model connections in diagrams, a non-deterministic internal choice of all input channels to allow an arbitrary input order, and similarly an internal choice of output channels to allow an arbitrary output order.

In order to reason about the *Circus* model, we need to take trace information into account and traces inevitably are more complicated if there are many inputs and outputs for a block. Eventually, using model checking or theorem proving to verify *Circus* models becomes more difficult. According to the semantic understanding of simulation in Simulink in Section 2.1, actually the order of inputs and outputs is irrelevant. Therefore, we have changed our approach to use the theory of designs in UTP to enable AG reasoning for Simulink block diagrams.

A *design* in UTP is a relation between two predicates where the first predicate (precondition) records the assumption and the second one (postcondition) specifies the commitment. *Designs* are intrinsically suitable for modelling and reasoning about state-based programs (such as B machines [19] and Z notations [20]) but not necessary for reactive programs. For simulation of Simulink diagrams, we discretise the simulation time and abstract it into steps (natural numbers), and define inputs and outputs of Simulink blocks as a function from step numbers to a list of inputs or outputs. In this way, the reactive behaviour is encoded in the step numbers

in functions. Finally, the theory of designs can be used to reason about reactive behaviour of Simulink diagrams without introduction of detailed implementation information .

Our work presented in this report has multiple contributions. The main contribution is to define a theoretical reasoning framework for control law block diagrams using the theory of designs in UTP. Each block or subsystem is translated to a design and then hierarchical connections of blocks are mapped to a variety of compositions of designs. Additionally, the refinement relation of designs, monotony of composition operators, and closure laws enable compositional reasoning of block diagrams using a contract-based methodology. The second contribution is our mechanisation of theories in the theorem prover Isabelle using our implementation of UTP, Isabelle/UTP. Then the practical contribution is our industrial case study of a subsystem in a safety critical aircraft cabin pressure control system.

In the next section, we describe the relevant preliminary background about Simulink and UTP. Then in Section 3, the assumptions we made are presented and a brief reasoning procedure is described. Section 4 defines our treatment of blocks in UTP and translations of a number of blocks are illustrated. Furthermore, we introduce our composition operators and their corresponding theorems in Section 5. Afterwards, in Section 6 we briefly describe the industrial case study. And we conclude our work in Section 7. Additionally, our mechanised theories, laws and case studies are attached in appendices.

2 Preliminaries

2.1 Control Law Diagrams and Simulink

Simulink is a model-based design modelling, analysis and simulation tool for signal processing systems and control systems. It offers a graphical modelling language which is based on hierarchical block diagrams. Its diagrams are composed of subsystems and blocks as well as connections between these subsystems and blocks. In addition, subsystems also can consists of others subsystems and blocks. And single function blocks have inputs and outputs, and some blocks also have internal states.

There is no formal semantics for Simulink. A consistent understanding [21, 22] of the simulation in Simulink is based on an *idealized* time model. All executions and updates of blocks are performed *instantaneously* (and infinitely fast) at exact simulation steps. Between the simulation steps, the system is *quiescent* and all values held on lines and blocks are constant. The inputs, states and outputs of a block can only be updated when there is a time hit for this block. Otherwise, all values held in the block are constant too though at exact simulation steps. According to this idealized time model, it is inappropriate to assume that blocks are sequentially executed. For example, for a block it is inappropriate to say it takes its inputs, calculates its outputs and states, and then outputs the results from this point of view. Simulation and code generation of Simulink diagrams use sequential semantics for implementation. But it is not always necessary. Simulink needs to have a mathematical and denotational semantics, which UTP provides.

Based on the idealized time model, a single function block can be regarded as a relation between its inputs and outputs. For instance, a unit delay block specifies that its initial output is equal to its initial condition and its subsequent output is equal to previous input. Then connections of blocks establish further relations between blocks. A directed connection from one block to another block specifies that the output of one block is equal to the input of another block. Finally, hierarchical block diagrams establish a relation network between blocks and subsystems.

2.2 Unifying Theories of Programming

UTP is a unified framework to provide a theoretical basis for describing and specifying computer languages across different paradigms such as imperative, functional, declarative, nondeterministic, concurrent, reactive and high-order. A theory in UTP is described using three parts: *alphabet*, a set of variable names for the theory to be studied; *signature*, rules of primitive statements of the theory and how to combine them together to get more complex program; and *healthiness conditions*, a set of mathematically provable laws or equations to characterise the theory.

The alphabetised relational calculus [23] is the most basic theory in UTP. A relation is defined as a predicate with undecorated variables (v) and decorated variables (v') in its alphabet. v denotes the observation made initially and v' denotes the observation made at the intermediate or final state.

The understanding of the simulation in Simulink is very similar to the concept "programs-as-predicates" [24]. This is the similar idea that the Refinement Calculus of Reactive Systems (RCRS) [8] uses to reason about reactive systems. RCRS is a compositional formal reasoning framework for reactive systems. The language is based on monotonic property transformers which is an extension of monotonic predicate transformers [25]. This semantic understanding makes Unifying Theories of Programming (UTP) [15] intrinsically suitable for reasoning of the semantics of Simulink simulation because UTP uses an alphabetised predicate calculus to model computations.

Refinement calculus is an important concept in UTP. Program correctness is denoted by $S \sqsubseteq P$, which means that the observations of the program P must be a subset of the observations permitted by the specification S. For instance, $(x = 2)$ is a refinement of the predicate $(x > 1)$. A refinement sequence is shown in (1). $S1$ is more general and abstract specification than $S2$ and thus more easier to implement. The predicate *true* is the easiest one and can be implemented by anything. $P2$ is more specific and determinate program than $P1$ and thus $P2$ is more useful in general. *false* is the strongest predicate and it is impossible to implement in practice.

$$\mathbf{true} \sqsubseteq S1 \sqsubseteq S2 \sqsubseteq P1 \sqsubseteq P2 \sqsubseteq \mathbf{false} \tag{1}$$

2.2.1 Designs

Designs are a subset of the alphabetised predicates that use a particular variable ok to record information about the start and termination of programs. The behaviour of a design is described from initial observation and final observation by relating its precondition P (assumption) to the postcondition Q (commitment) as $P \vdash Q$ [14, 15] (assuming P holds initially, then Q is established). Therefore, the theory of designs is intrinsically suitable for assume-guarantee reasoning [26].

Definition 2.1 (Design)

$$P \vdash Q \triangleq P \wedge ok \Rightarrow Q \wedge ok'$$

A design is defined in 2.1 where ok records the program has started and ok' that it has terminated. It states that if the design has started ($ok = true$) in a state satisfying its precondition P, then it will terminate ($ok' = true$) with its postcondition Q established. We introduce some basic designs.

Definition 2.2 (Basic Designs)

$$\begin{aligned}
\top_D &\triangleq \textbf{\textit{true}} \vdash \textbf{\textit{false}} = \neg\, ok && \text{[Miracle]}\\
\bot_D &\triangleq \textbf{\textit{false}} \vdash \textbf{\textit{false}} = \textbf{true} && \text{[Abort]}\\
(x := e) &\triangleq \left(\textbf{\textit{true}} \vdash x' = e \wedge y' = y \wedge \cdots\right) && \text{[Assignment]}\\
\mathit{I\!I}_{\mathbf{D}} &\triangleq (\textbf{\textit{true}} \vdash \mathit{I\!I}) && \text{[Skip]}
\end{aligned}$$

Abort ($\bot_D$) and miracle ($\top_D$) are the top and bottom element of a complete lattice formed from designs under the refinement ordering. Abort ($\bot_D$) is never guaranteed to terminate and miracle establishes the impossible. In addition, abort is refined by any other design and miracle refines any other designs. Assignment has precondition ***true*** provided the expression e is well-defined and establishes that only the variable x is changed to the value of e and other variables have not changed. The skip $\mathit{I\!I}_{\mathbf{D}}$ is a design identity that always terminates and leaves all variables unchanged.

Designs can be sequentially composed with the following theorem:

Theorem 2.1 (Sequential Composition)

$$(p_1 \vdash Q_1 \,;\, P_2 \vdash Q_2) \quad = \quad ((p_1 \wedge \neg\, (Q_1 \,;\, \neg\, P_2)) \vdash Q_1 \,;\, Q_2) \qquad [p_1\text{-condition}]$$

A sequence of designs terminates when p_1 holds and Q_1 guarantees to establish P_2 provided p_1 is a condition. On termination, sequential composition of their postconditions is established. A condition is a particular predicate that only has input variables in its alphabet. In other words, a design of which its precondition is a condition only makes the assumption about its initial observation (input variables) and without output variables. That is the same case for our treatment of Simulink blocks. Furthermore, sequential composition has two important properties: associativity and monotonicity which are given in the theorem below.

Theorem 2.2 (Associativity, Monotonicity)

$$\begin{aligned}
&P_1;\ (P_2;\ P_3) = (P_1;\ P_2)\,;\ P_3 && \text{[Associativity]}\\
&(P_1;\ Q_1) \sqsubseteq (P_2;\ Q_2) && \text{[Monotonicity]}
\end{aligned}$$

Refinement of designs is given in the theorem below.

Theorem 2.3 (Refinement)

$$\begin{aligned}
(P_1 \vdash Q_1 \sqsubseteq P_2 \vdash Q_2) &= (P_2 \sqsubseteq P_1) \wedge (Q_1 \sqsubseteq P_1 \wedge Q_2)\\
&= [P_1 \Rightarrow P_2] \wedge [P_1 \wedge Q_2 \Rightarrow Q_1]
\end{aligned}$$

Refinement of designs is achieved by either weakening the precondition, or strengthening the postcondition in the presence of the precondition.

In addition, we define two notations pre_D and $post_D$ to retrieve the precondition of the design and the postcondition in the presence of the precondition.

Definition 2.3 (pre_D and $post_D$)

$$\begin{aligned}
&pre_D\,(P \vdash Q) \triangleq P\\
&post_D\,(P \vdash Q) \triangleq (P \Rightarrow Q)
\end{aligned}$$

3 Assumptions and General Procedure of Reasoning

3.1 Assumptions

Causality We assume the discrete-time systems modelled in Simulink diagrams are *causal* where the output at any time only depends on values of present and past inputs. Consequently, if inputs to a casual system are identical up to some time, their corresponding outputs must also be equal up to this time.

Single-rate This mechanised work captures only single sampling rate Simulink models, which means the timestamps of all simulation steps are multiples of a base period T. Eventually, steps are abstracted and measured by step numbers (natural numbers $\mathbb{N}$) and T is removed from its timestamp.

An *algebraic loop* occurs in simulation when there exists a signal loop with only direct feedthrough blocks in the loop, such as instantaneous feedback without delay in the loop. [5, 6, 27] assume there are no algebraic loops in Simulink diagrams and RCRS [8] identifies it as a future work. Our theoretical framework can reason about discrete-time block diagrams with algebraic loops: specifically check if there are solutions and find the solutions.

The signals in Simulink can have many data types, such as signed or unsigned integer, single float, double float, and boolean. The default type for signals are *double* in Simulink. This work uses real numbers in Isabelle/HOL as a universal type for all signals. Real numbers in Isabelle/HOL are modelled precisely using Cauchy sequences, which enables us to reason in the theorem prover. This is a reasonable simplification because all other types could be expressed using real numbers, such as boolean as 0 and 1.

3.2 General Procedure of Applying Assumption-Guarantee Reasoning

Simulink blocks are semantically mapped to designs in UTP where additionally we model assumptions of blocks to avoid unpredictable behaviour (such as a divide by zero error in the Divide block) and ensure healthiness of blocks. The general procedure of applying AG reasoning to Simulink blocks is given below.

- Single blocks and atomic subsystems are translated to single designs with assumptions and guarantees, as well as block parameters. This is shown in Section 4.
- Hierarchical block connections are modelled as compositions of designs (I) by means of sequential composition, parallel composition and feedback.
- Properties or Requirements of block diagrams (S) to be verified are modelled as designs as well.
- The refinement relation ($S \sqsubseteq I$) in UTP is used to verify if a given property is satisfied by a block diagram (or a subsystem) or not. Our approach supports compositional reasoning according to monotonicity of composition operators in terms of the refinement relation. Provided two properties S_1 and S_2 are verified to hold in two blocks or subsystems I_1 and I_2 respectively, then composition of the properties is satisfied by the composition of the blocks or subsystems in terms of the same operator.

$$(S_1 \sqsubseteq I_1 \wedge S_2 \sqsubseteq I_2) \Rightarrow (S_1 \ op \ S_2 \sqsubseteq I_1 \ op \ I_2)$$

4 Semantic Translation of Blocks

In this section, we focus on the methodology to map individual Simulink blocks to designs in UTP semantically. Basically, a block or subsystem is regarded as a relation between inputs and outputs. We use an undashed variable and a dashed variable to denotes input signals and output signals respectively.

4.1 State Space

The state space of our theory for block diagrams is composed of only one variable in addition to *ok*, named *inouts*. Originally, we defined it as a function from real numbers (time t) to a list of inputs or outputs. Each element in the list denotes an input or output and their order in the list is the order of input or output signals.

$$inouts : \mathbb{R}_{\geq 0} \to \operatorname{seq} \mathbb{R}$$

However, according to our single-rate assumption, the timestamp at time t is equal to multiples of a basic period T: $inouts(t) = inouts(n * T)$. Then T is abstracted away and only the step number n is related. Finally, it is defined below.

$$inouts : \mathbb{N} \to \operatorname{seq} \mathbb{R}$$

Then a block is a design that establishes the relation between an initial observation *inouts* (a list of input signals) and a final observation $inouts'$ (a list of output signals). Additionally, this is subject to the assumption of the design.

4.2 Healthiness Condition: *SimBlock*

This healthiness condition characterises a block with a fixed number of inputs and outputs. Additionally it is feasible. A design is a feasible block if there exists at least a pair of *inouts* and $inouts'$ that establishes both the precondition and postcondition of the design.

Definition 4.1 (*SimBlock*) *A design P with m inputs and n outputs is a Simulink block if P is **SimBlock** healthy.*

$$\textbf{\textit{SimBlock}}(m, n, P) \triangleq \left(\begin{array}{l} (pre_D(P) \wedge post_D(P) \neq \textbf{\textit{false}}) \wedge \\ ((\forall\, n \bullet \#\,(inouts\ n) = m) \sqsubseteq Dom\ \ (pre_D(P) \wedge post_D(P))) \\ ((\forall\, n \bullet \#\,(inouts\ n) = n) \sqsubseteq Ran\ \ (pre_D(P) \wedge post_D(P))) \end{array} \right)$$

where Dom and Ran calculate the characteristic predicate for domain and range. Their definitions are shown below.

$$Dom(P) \triangleq \left(\exists\, inouts' \bullet P\right)$$
$$Ran(P) \triangleq (\exists\, inouts \bullet P)$$

inps and *outps* are the operators to get the number of input signals and output signals for a block. They are implied from ***SimBlock*** of the block.

Definition 4.2 (*inps* and *outps*)

$$\textbf{\textit{SimBlock}}(m, n, P) \Rightarrow (inps(P) = m \wedge outps(P) = n)$$

Provided that P is a healthy block, inps returns the number of its inputs and outps returns the number of its outputs.

4.3 Blocks

In order to give definitions of the corresponding designs for Simulink blocks, firstly we define a design pattern *FBlock*. Then we illustrate definitions of two typical Simulink blocks and three additional virtual blocks using this pattern. The definitions of all other blocks could be found in Appendix A.

4.3.1 Pattern

We defined a pattern that is used to define all other blocks.

Definition 4.3 (*FBlock*)

$$
\begin{array}{l}
FBlock\,(f_1, m, n, f_2) \\
\triangleq \left(\begin{array}{l}
\forall\, nn \bullet f_1\,(inouts, nn) \\
\vdash \\
\forall\, nn \bullet \left(\begin{array}{l}
\#\,(inouts(nn)) = m \wedge \\
\#\,(inouts'(nn)) = n \wedge \\
(inouts'(nn) = f_2\,(inouts'(nn), nn)) \wedge \\
(\forall\, sigs : \mathbb{N} \rightarrow \text{seq}\ \mathbb{R}, nn : \mathbb{N} \bullet \#\,(sigs\ nn) = m \Rightarrow \#\,(f_2(sigs, nn)) = n)
\end{array} \right)
\end{array} \right)
\end{array}
$$

FBlock has four parameters: f_1 is a predicate that specifies the assumption of the block and it is a function on input signals; m and n are the number of inputs and outputs, and f_2 is a function that relates inputs to outputs and is used to establish the postcondition of the block. The precondition of *FBlock* states that f_1 holds for inputs at any step nn. And the postcondition specifies that for any step nn the block always has m inputs and n outputs, the relation between outputs and inputs are given by f_2, and additionally f_2 always produces n outputs provided there are m inputs.

4.3.2 Simulink Blocks

Definition 4.4 (Unit Delay)

$$UnitDelay\,(x_0) \triangleq FBlock\,(true_f, 1, 1, (\lambda\, x, n \bullet \langle x_0 \lhd n = 0 \rhd hd\,(x\ (n-1))\rangle))$$

where hd is an operator to get the head of a sequence, and $true_f = (\lambda\, x, n \bullet true)$ *that means no constraints on input signals.*

The definition 4.4 of the Unit Delay block is straightforward: it accepts all inputs, has one input and one output, and produces initial value x_0 in its first step (0) and the previous input otherwise.

Definition 4.5 (Product (Divide))

$$Div2 \triangleq FBlock\,((\lambda\, x, n \bullet hd(tl(x\ n)) \neq 0)\,, 2, 1, (\lambda\, x, n \bullet \langle hd(x\ n)/hd(tl(x\ n))\rangle))$$

where tl is an operator to get the tail of a sequence.

The definition 4.5 of Divide block is slightly different because it assumes the input value of its second input signal is not zero at any step. By this way, the precondition enables modelling of non-input-receptive systems that may reject some inputs at some points.

4.3.3 Virtual Blocks

In addition to Simulink blocks, we have introduced three blocks for the purpose of composition: *Id*, *Split*2, and *Router*. The usage of these blocks is illustrated in Figure 1.

Definition 4.6 (Id)

$$Id \triangleq FBlock\left(true_f, 1, 1, (\lambda\, x, n \bullet \langle hd\,(x\ \ n)\rangle)\right)$$

The identity block *Id* is a block that has one input and one output, and the output value is always equal to the input value. It establishes a fact that a direct signal line in Simulink could be treated as sequential composition of many *Id* blocks. The usage of *Id* is shown in Figure 1a.

Definition 4.7 (Split2)

$$Split2 \triangleq FBlock\left(true_f, 1, 2, (\lambda\, x, n \bullet \langle hd\,(x\ \ n), hd\,(x\ \ n)\rangle)\right)$$

*Split*2 corresponds to the signal connection splitter that produces two signals from one and both signals are equal to the input signal. The usage of *Split*2 is shown in Figure 1b.

Definition 4.8 (Router)

$$Router\,(m, table) \triangleq FBlock\left(true_f, m, m, (\lambda\, x, n \bullet reorder\,((x\ \ n), table))\right)$$

Router corresponds to the crossing connection of signals and this virtual block changes the order of input and output signals according to the supplied table. The usage of *Router* is shown in Figure 1c.

4.4 Subsystems

The treatment of subsystems (no matter whether hierarchical subsystems or atomic subsystems) in our designs is similar to that of blocks. They could be regarded as a bigger black box that relates inputs to outputs.

5 Block Compositions

In this section, we define three composition operators that are used to compose subsystems or systems from blocks. We also use three virtual blocks to map Simulink's connections in our designs.

For all definitions and laws in this section, if there are no special notes, we assume the following predicates.

$$\begin{aligned}
&\textbf{\textit{SimBlock}}\,(m_1, n_1, P_1)\\
&\textbf{\textit{SimBlock}}\,(m_2, n_2, P_2)\\
&\textbf{\textit{SimBlock}}\,(m_3, n_3, P_3)\\
&\textbf{\textit{SimBlock}}\,(m_1, n_1, Q_1)\\
&\textbf{\textit{SimBlock}}\,(m_2, n_2, Q_2)\\
&P_1 \sqsubseteq Q_1\\
&P_2 \sqsubseteq Q_2
\end{aligned}$$

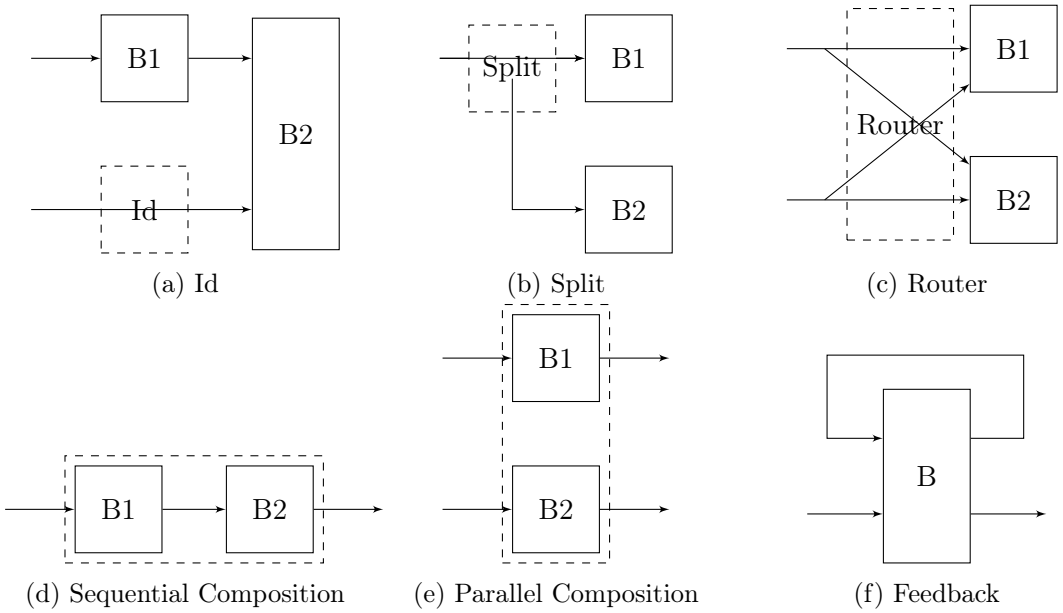

(a) Id (b) Split (c) Router

(d) Sequential Composition (e) Parallel Composition (f) Feedback

Figure 1: Composition of Blocks

5.1 Sequential Composition

The meaning of sequential composition of designs is defined in Theorem 2.1. It corresponds to composition of two blocks in Figure 1d where the outputs of B_1 are equal to the inputs of B_2. Provided

$$P = (FBlock\,(true_f, m_1, n_1, f_1)) \qquad \textbf{\textit{SimBlock}}\,(m_1, n_1, P)$$
$$Q = (FBlock\,(true_f, n_1, n_2, f_2)) \qquad \textbf{\textit{SimBlock}}\,(n_1, n_2, Q)$$

The expansion law of sequential composition is given below.

Theorem 5.1 (Expansion)

$$(P;\ Q) = FBlock\,(true_f, m_1, n_2, (f_2 \circ f_1)) \qquad \text{[Expansion]}$$

This theorem establishs that sequential composition of two blocks, where the number of outputs of the first block is equal to the number of inputs of the second block, is simply a new block with the same number of inputs as the first block P and the same number of outputs as the second block Q, and additionally the postcondition of this composed block is function composition. In addition, the composed block is still ***SimBlock*** healthy which is shown in the closure theorem below.

Theorem 5.2 (Closure)

$$\textbf{\textit{SimBlock}}\,(m_1, n_2, (P;\ Q)) \qquad [\textbf{\textit{SimBlock}}\ \text{Closure}]$$

5.2 Parallel Composition

Parallel composition of two blocks is a stack of inputs and outputs from both blocks and is illustrated in Figure 1e. It is defined below.

Definition 5.1 (Parallel Composition)

$$P \parallel_B Q \triangleq \left(\begin{array}{l} (takem(inps(P) + inps(Q))\ \ inps(P);\ \ P) \\ \parallel_{B_M} \\ (dropm(inps(P) + inps(Q))\ \ inps(P);\ \ Q) \end{array} \right)$$

where *takem* and *dropm* are two blocks to split inputs into two parts and their definitions can be found in Appendix A, and B_M is defined below.

Definition 5.2 (B_M)

$$B_M \triangleq \big(ok' = 0.ok \wedge 1.ok\big) \wedge \big(inouts' = 0.inouts \frown 1.inouts\big)$$

The definition of parallel composition 5.1 for designs is similar to the parallel-by-merge scheme [15, Sect. 7.2] in UTP. Parallel-by-merge is denoted as $P \parallel_M Q$ where M is a special relation that explains how the output of parallel composition of P and Q should be merged following execution.

However, parallel-by-merge assumes that the initial observations for both predicates should be the same. But that is not the case for our block composition because the inputs to the first block and that to the second block are different. Therefore, in order to use the parallel by merge, firstly we need to partition the inputs to the composition into two parts: one to the first block and another to the second block. This is illustrated in Figure 2 where we assume that P has m inputs and i outputs, and Q has n inputs and j outputs. Finally, it has the same inputs $(m+n)$ and the outputs of P and Q are merged by B_M to get $i+j$ outputs.

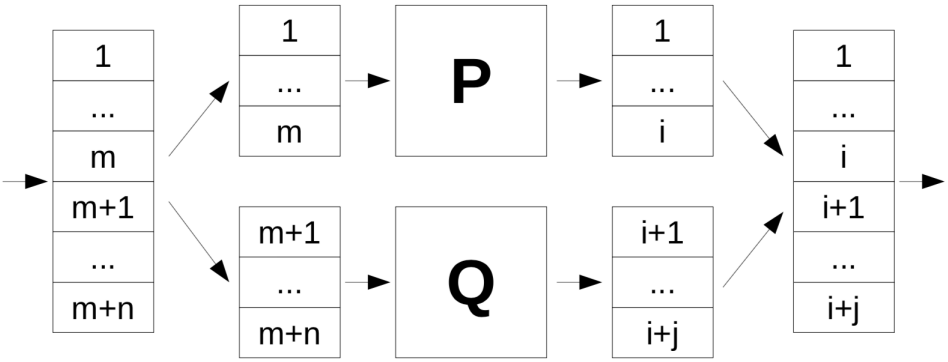

Figure 2: Parallel Composition of Two Blocks

The merge operator B_M states that the parallel composition terminates if both blocks terminate. And on termination, the output of parallel composition is concatenation of the outputs from the first block and the outputs from the second block. *takem* and *dropm* are two blocks that have the same inputs and the number of inputs is equal to addition of the number inputs of P and the number inputs of Q. *takem* only takes the first part of inputs as required by P, and *dropm* takes the second part of inputs as required by Q.

Theorem 5.3 (Associativity, Monotonicity, and *SimBlock* Closure)

$$
\begin{array}{ll}
P_1 \parallel_B (P_2 \parallel_B P_3) = (P_1 \parallel_B P_2) \parallel_B P_3 & \text{[Associativity]} \\
(P_1 \parallel_B Q_1) \sqsubseteq (P_2 \parallel_B Q_2) & \text{[Monotonicity]} \\
\textbf{\textit{SimBlock}}\,(m1 + m2, n1 + n2, (P_1 \parallel_B P_2)) & \text{[\textbf{\textit{SimBlock}} Closure]} \\
\mathit{inps}\,(P_1 \parallel_B P_2) = m_1 + m_2 & \\
\mathit{outps}\,(P_1 \parallel_B P_2) = n_1 + n_2 &
\end{array}
$$

Parallel composition is associative, monotonic in terms of the refinement relation, and ***SimBlock*** healthy. The inputs and outputs of parallel composition are combination of the inputs and outputs of both blocks.

Theorem 5.4 (Parallel Operator Expansion) *Provided*

$$
\begin{array}{ll}
P = (\mathit{FBlock}\,(\mathit{true_f}, m_1, n_1, f_1)) & \textbf{\textit{SimBlock}}\,(m_1, n_1, P) \\
Q = (\mathit{FBlock}\,(\mathit{true_f}, m_2, n_2, f_2)) & \textbf{\textit{SimBlock}}\,(m_2, n_2, Q)
\end{array}
$$

then,

$$
\begin{array}{ll}
(P \parallel_B Q) = \mathit{FBlock} \left(\begin{array}{l} \mathit{true_f}, m_1 + m_2, n_1 + n_2, \\ \left(\lambda\, x, n \bullet \left(\begin{array}{l} (f_1 \circ (\lambda\, x, n \bullet \mathit{take}\,(m_1, x\ n))) \\ \frown (f_2 \circ (\lambda\, x, n \bullet \mathit{drop}\,(m_1, x\ n))) \end{array} \right) \right) \end{array} \right) & \text{[Expansion]} \\
\textbf{\textit{SimBlock}}\,(m_1 + m_2, n_1 + n_2, (P \parallel_B Q)) & \text{[\textbf{\textit{SimBlock}} Closure]}
\end{array}
$$

Parallel composition of two *FBlock* defined blocks is expanded to get a new block. Its postcondition is concatenation of the outputs from P and the outputs from Q. The outputs from P (or Q) are function composition of its block definition function f_1 (or f_2) with *take* (or *drop*).

5.3 Feedback

The feedback operator loops an output back to an input, which is illustrated in Figure 1f.

Definition 5.3 (f_D)

$$P\ f_D\ (i, o) \triangleq (\exists\, \mathit{sig} \bullet (\mathit{PreFD}(\mathit{sig}, \mathit{inps}(P), i);\ P;\ \mathit{PostFD}(\mathit{sig}, \mathit{outps}(P), o)))$$

where i and o denotes the index number of the output signal and the input signal, which are looped. *PreFD* denotes a block that adds *sig* into the ith place of the inputs.

Definition 5.4 (*PreFD*)

$$\mathit{PreFD}(\mathit{sig}, m, \mathit{idx}) \triangleq \mathit{FBlock}\,(\mathit{true_f}, m - 1, m, (f\_\mathit{PreFD}(\mathit{sig}, \mathit{idx})))$$

where $f\_\mathit{PreFD}(\mathit{sig}, \mathit{idx}) = \lambda\, x, n \bullet (\mathit{take}(\mathit{idx}, (x\ n)) \frown \langle (\mathit{sig}\ n) \rangle \frown \mathit{drop}(\mathit{idx}, (x\ n)))$

and *PostFD* denotes a block that removes the oth signal from the outputs of P and this signal shall be equal to *sig*.

Definition 5.5 (*PostFD*)

$$PostFD(sig, n, idx) \triangleq \left(\begin{array}{l} \textbf{\textit{true}} \\ \vdash \\ \forall\, nn \bullet \left(\begin{array}{l} \#\,(inouts(nn)) = n \wedge \\ \#\,(inouts'(nn)) = n - 1 \wedge \\ (inouts'(nn) = (f\_PostFD(sig, idx, inouts'(nn), nn)) \wedge \\ sig(nn) = inouts(nn)!idx \end{array} \right) \end{array} \right)$$

where $f\_PostFD(idx) = \lambda\, x, n \bullet (take(idx, (x\ n)) \frown drop(idx + 1, (x\ n)))$ *and* ! *is an operator to get the element in a list by its index.*

The basic idea to construct a feedback operator is to use existential quantification to specify that there exists one signal *sig* that it is the ith input and oth output, and their relation is established by the block P. This is illustrated in Figure 3 where m and n are the number of inputs and outputs of P. *PreFD* adds a signal into the inputs at i and P takes assembled inputs and produces an output in which the oth output is equal to the supplied signal. Finally, the outputs of feedback are the outputs of P without the oth output. Therefore, a block with feedback is translated to a sequential composition of *PreFD*, P, and *PostFD*.

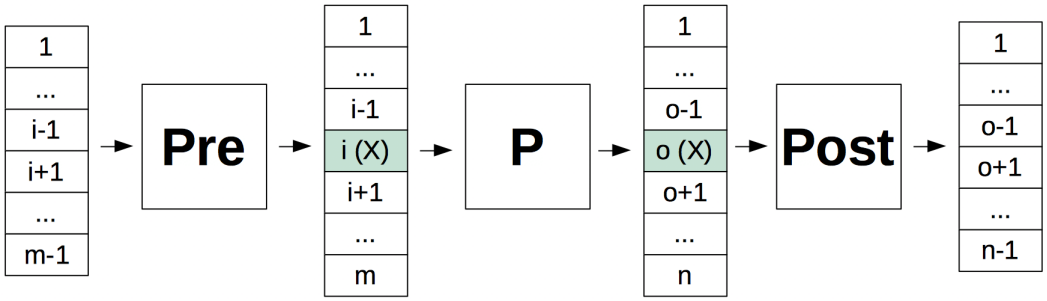

Figure 3: Feedback

Theorem 5.5 (Monotonicity) *Provided*

$$\textbf{\textit{SimBlock}}\,(m_1, n_1, P_1) \qquad \textbf{\textit{SimBlock}}\,(m_1, n_1, P_2)$$
$$P_1 \sqsubseteq P_2 \qquad i_1 < m_1 \wedge o_1 < n_1$$

then,

$$(P_1\ f_D\ (i_1, o_1)) \sqsubseteq (P_2\ f_D\ (i_1, o_1))$$

The monotonicity law states that if a block is a refinement of another block, then its feedback is also a refinement of the same feedback of another block.

Theorem 5.6 (Expansion) *Provided*

$$P = FBlock\,(true_f, m, n, f) \qquad \textbf{\textit{SimBlock}}\,(m, n, P)$$
$$Solvable\_unique(i, o, m, n, f) \qquad is\_Solution(i, o, m, n, f, sig)$$

then,

$$(P\ f_D\ (i,o))$$
$$= FBlock\,(true_f, m-1, n-1, (\lambda\, x, n \bullet (f\_PostFD(o) \circ f \circ f\_PostFD(sig, x, i))\ \ x\ \ n)) \qquad \text{[Expansion]}$$
$$\textbf{\textit{SimBlock}}\,(m-1, n-1, (P\ f_D\ (i,o))) \qquad \text{[}\textbf{\textit{SimBlock}}\text{ Closure]}$$

In the expansion theorem, where

Definition 5.6 (*Solvable_unique*)

$$Solvable\_unique\,(i,o,m,n,f) \triangleq$$
$$\left(\begin{array}{l} (i < m \wedge o < n) \wedge \\ \left(\forall\, sigs \bullet \left(\begin{array}{l} (\forall\, nn \bullet \#\,(sigs\ \ nn) = (m-1)) \Rightarrow \\ (\exists_1\, sig \bullet (\forall\, nn \bullet (sig\ \ nn = (f\,(\lambda\, n1 \bullet f\_PreFD\,(sig, i, sigs, n1)\,, nn))!o))) \end{array} \right) \right) \end{array} \right)$$

The *Solvable_unique* predicate characterises a condition that the block with feedback has a unique solution that satisfies the constraint of feedback: the corresponding output and input are equal.

Definition 5.7 (*is_Solution*)

$$is\_Solution\,(i,o,m,n,f,sig) \triangleq$$
$$\left(\left(\forall\, sigs \bullet \left(\begin{array}{l} (\forall\, nn \bullet \#\,(sigs\ \ nn) = (m-1)) \Rightarrow \\ (\forall\, nn \bullet (sig\ \ nn = (f\,(\lambda\, n1 \bullet f\_PreFD\,(sig, i, sigs, n1)\,, nn))!o)) \end{array} \right) \right) \right)$$

The *is_Solution* predicate evaluates a supplied signal to check if it is a solution for the feedback.

The expansion law of feedback assumes the function f, that is used to define the block P, is solvable in terms of i, o, m and n. In addition, it must have one unique solution *sig* that resolves the feedback.

Our approach to model feedback in designs enables reasoning about systems with algebraic loops. If a block defined by *FBlock* and $Solvable\_unique\,(i,o,m,n,f)$ is true, then the feedback composition of this block in terms of i and o is feasible no matter whether there are algebraic loops or not.

5.4 Composition Examples

For the compositions in Figure 1, their corresponding maps in our design theory are shown below.

- Figure 1a: $(B_1 \parallel_B Id)\,;\ B_2$
- Figure 1b: $Split2;\ (B_1 \parallel_B B_2)$
- Figure 1c: $(Split2 \parallel_B Split2)\,;\ Router(4, [0,2,1,3]);\ (B_1 \parallel_B B_2)$
- Figure 1d: $B_1;\ B_2$
- Figure 1e: $B_1 \parallel_B B_2$
- Figure 1f: $B\ f_D\ (0,0)$

6 Case Study

This case study, verification of a post_landing_finalize subsystem, is taken from an aircraft cabin pressure control application. The original Simulink model is from Honeywell through our industrial link with D-RisQ. This case is also studied in [28] and the diagram shown in Figure 4 is from the paper. The purpose of this subsystem is to implement that the output *finalize_event* is triggered after the aircraft door has been open for a minimum specific amount of time following a successful landing.

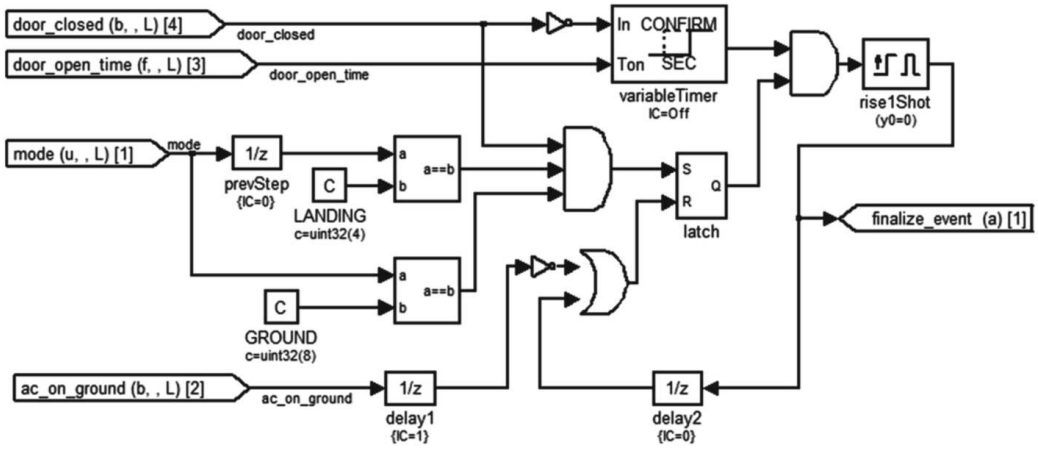

Figure 4: Post Landing Finalize (source: [28])

In order to apply our AG reasoning into this Simulink model, firstly we model the subsystem in our block theories as shown in Section 6.1. Then we verify a number of properties for three small subsystems in this model, which is given in Section 6.2. Finally, in Section 6.3 we present verification of four requirements of this subsystem. To avoid confusion between the subsystem and three small subsystems, in the following sections we use the *system* to denote the post_landing_finalize subsystem to be verified, and the *subsystems* to denote three small subsystems.

6.1 Modelling

We start with translation of three small subsystems (variableTimer, rise1Shot and latch) according to our block theories.

The subsystem latch is modelled as below. It is shown in Appendix C.3 as well.

$$(((((\mathit{UnitDelay}\ 0) \parallel_B \mathit{Id})\,;\ (\mathit{LopOR}\ 2)) \parallel_B (\mathit{Id};\ \mathit{LopNOT}))\,;\ (\mathit{LopAND}\ 2)\,;\ \mathit{Split}2)\ f_D\ (0,0)$$

The blocks *LopOR*, *LopNOT* and *LopAND* correspond to the OR, NOT and AND operators in the logic operator block. Their definitions can be found in Appendix A. Then we apply composition definitions, expansion and SimBlock closure laws to simplify the subsystem. The latch subsystem is finally simplified to a design.

$$\mathit{latch} = \mathit{FBlock}\,(\mathit{true}_f, 2, 1, \mathit{latch\_simp\_pat\_f})$$

where the definition of *latch_simp_pat_f* is given in Appendix C.

Similarly, variableTimer and rise1Shot are modelled and simplified as shown in Appendix C.1 and C.2 respectively.

Finally, we can use the similar way to compose the three subsystems with other blocks in this diagram to get the corresponding composition of post_landing_finalise_1, and then apply the similar laws to simplify it further into one block and verify requirements for this system. However, for the outermost feedback it is difficult to use the similar way to simplify it into one block because it is more complicate than feedbacks in other three small subsystems (variableTimer, rise1Shot and latch). In order to use the expansion theorem 5.6 of feedback, we need to find a solution for the block and prove the solution is unique. With increasing complexity of blocks, this expansion is becoming harder and harder. Therefore, post_landing_finalise_1 has not been simplified into one block. Instead, it is simplified to a block with a feedback which can be seen in the lemma *post_landing_finalize_1_simp* in Appendix C.

$$post\_landing\_finalize\_1 = plf\_rise1shot\_simp\ f_D\ (4,1)$$

6.2 Subsystems Verification

After simplification, we can verify properties of the subsystems using the refinement relation.

We start with verification of a property for variableTimer: *vt_req_00*. This property states that if the door is closed, then the output of this subsystem is always false. The verification of this property is given in Appendix C.1.1. However, this property can not be verified in absence of an assumption made to the second input: *door_open_time*. This is due to a type conversion block `int32` used in the subsystem. If the input to `int32` is larger than 2147483647 (that is, *door_open_time* larger than 2147483647/10), its output is less than zero and finally the output is true. That is not the expected result. Practically, *door_open_time* should be less than 2147483647/10. Therefore, we can make an assumption of the input and eventually verify this property as given in the lemma *vt_req_00*. Additionally, we suggest a substitution of `int32` by `uint32`, or a change of the data type for the input from double to unsigned integer, such as `uint32`.

As for the rise1Shot subsystem, we verified one property: *rise1shot_req_00*. This property specifies that the output is true only when current input is true and previous input is false (see Appendix C.2.1). It means it is triggered only by a rising edge and continuous true inputs will not enable the output.

Furthermore, one property for the latch subsystem (a SR AND-OR latch) is verified (see Appendix C.3.1). The property *latch_req_00* states that as long as the second input R is true, its output is always false. This is consistent with the definition of the SR latch in circuits.

6.3 Requirement Verification

The four requirements to be verified are illustrated in Table 1.

Our approach to cope with the difficulty to simplify this system into one design is to apply compositional reasoning. Generally, application of compositional reasoning to verify requirements is as follows.

- In order to verify the property satisfied by post_landing_finalise_1:

  $$C \sqsubseteq post\_landing\_finalise\_1$$

  , that is, to verify

  $$C \sqsubseteq (plf\_rise1shot\_simp\ f_D\ (4,1))$$

Requirement 1	A finalize event will be broadcast after the aircraft door has been open continuously for *door_open_time* seconds while the aircraft is on the ground after a successful landing.
Requirement 2	A finalize event is broadcast only once while the aircraft is on the ground.
Requirement 3	The finalize event will not occur during flight.
Requirement 4	The finalize event will not be enabled while the aircraft door is closed.

Table 1: Requirements for the system (source: [28])

;

- We need to find a decomposed contract C' such that

  $$C \sqsubseteq (C' \ f_D \ (4,1))$$

  and

  $$(C' \sqsubseteq plf\_rise1shot\_simp)$$

  ;

- Then we get

  $$(C' \ f_D \ (4,1)) \sqsubseteq (plf\_rise1shot\_simp \ f_D \ (4,1))$$

  using the monotonicity theorem 5.5 of feedback;

- Finally, according to transitivity of the refinement relation, it establishes that

  $$C \sqsubseteq (plf\_rise1shot\_simp \ f_D \ (4,1))$$

  .

6.3.1 Requirement 3 and 4

Requirement 3 and 4 are verified together as shown in Appendix C.5.4. *req_04_contract* and *req_04_1_contract* are C and C' described above respectively.

6.3.2 Requirement 1

According to Assumption 3 "*door_open_time* does not change while the aircraft is on the ground" and the fact that this requirement specifies the aircraft is on the ground, therefore *door_open_time* is constant for this scenario. In order to simplify the verification, we assume it is always constant. The contract *req_01_contract* specifies that

- it always has four inputs and one output;
- and the requirement:
  - after a successful landing at step m and $m+1$: the door is closed, the aircraft is on ground, and the mode is switched from LANDING (at step m) to GROUND (at step $m+1$),

- then the door has been open continuously for *door_open_time* seconds from step $m+2+p$ to $m+2+p+$ *door_open_time*, therefore the door is closed at the previous step $m+2+p-1$,
- while the aircraft is on ground: *ac_on_ground* is true and *mode* is GROUND,
- additionally, between step m and $m+2+p$, the *finalize_event* is not enabled,
- then a *finalize_event* will be broadcast at step $m+2+p+$ *door_open_time*.

As shown in Appendix C.5.1, this requirement has been verified.

6.3.3 Requirement 2

The contract *req_02_contract* specifies that

- it always has four inputs and one output;
- and the requirement:
  - if a finalize event has been broadcast at step m,
  - while the aircraft is on ground: *ac_on_ground* is true and *mode* is GROUND,
  - then a finalize event will not be broadcast again.

As shown in Appendix C.5.2, this requirement has been verified too.

6.4 Summary

In sum, we have translated and mechanised the post_landing_finalize diagram in Isabelle/UTP, simplified its three subsystems (variableTimer, rise1Shot and latch) and the post_landing_finalize into a design with feedback, and finally verified all four requirements of this system. In addition, our work has identified a vulnerable block in variableTimer. This case study demonstrates that our verification framework has rich expressiveness to specify scenarios for requirement verification (as illustrated in the verification of Requirement 1 and 2) and our verification approach is useful in practice.

7 Conclusions

In this report, we present our work for the VeTSS funded project "Mechanised Assume-Guarantee Reasoning for Control Law Diagrams via Circus" from developed theories and laws as well as their mechanisation in Isabelle/UTP. In addition, we present practical application of our theories to reason about a Simulink model in the aircraft cabin pressure control application. Our mechanisation is also attached to this report.

7.1 Progress Summary

The project wss initially proposed to have four work packages. And a summary of progress is shown in Table 2.

WP1 – framework: we reviewed current solutions that use contract-based reasoning and Circus-based program verification for Simulink. Eventually we put forward a new contract-based assume-guarantee reasoning methodology for Simulink diagrams. The theoretical part of this approach is based on the theory of design in UTP that is presented in this report.

Work Package	Description	Progress
WP1	Review current Simulink reasoning solutions and put forward a new contract-based methodology (using UTP design theory) to reason about faulty behaviour through assumptions	100%
WP2	Define assumption-guarantee contracts for the Simulink semantics and mechanise them in Isabelle/UTP, including operators and a limited selection of Simulation discrete blocks that are used in our case studies, and mechanise in Isabelle/UTP	100%
WP3	Mechanise industrial case studies (building case and post landing finalize case) in Isabelle/UTP using mechanised block libraries (produced in WP2), including modelling, contract calculation, and proof	50%
WP4	Investigate the weakest assumption calculus based on the examples, in order to automate reasoning about interferences between blocks and subsystems	25%

Table 2: Project Progress Summary

WP2 – definition and mechanisation: one advantage of using designs for reasoning is its existing theory and mechanisation in Isabelle/UTP. However, in order to accommodate Simulink diagrams into designs easily, we have defined three additional virtual blocks (Identity, Split and Router) and two extra operators (Parallel Composition and Feedback). They correspond to signal connections and block composition in Simulink. With these new blocks and operators (as well as existing operators for designs), we could translate Simulink diagrams into composition of designs. In addition, we have mechanised (in Isabelle/UTP) the three virtual blocks and 14 Simulink blocks (Constant, Unit Delay, Discrete-Time Integrator, Sum, Product, Gain, Saturation, MinMax, Rounding, Logic Operator, Relational Operator, Switch, Data Type Conversion and Initial Condition) that will be used in our case studies.

WP3 – case studies: using definitions and mechanisation of these blocks and operators, we have mechanised one of our case study (the post landing finalize) in Isabelle/UTP.

WP4 - Though time did not permit us to consider the weakest assumption calculus for Simulink in details, in a parallel project we have explored a calculus for weakest reactive rely conditions for reactive contracts based in UTP. The details of this can be found in a draft journal paper under review for Theoretical Computer Science [26]. This initial study provides necessary background for future work with Simulink.

Due to the fact that we started this project two months late since October 2017 because of delays in receiving funding, therefore we have limited time to finish all proposed work. We have not verified all requirements of the post landing finalize case, have not started the second building case study, and have investigaged WP4 partially.

Acknowledgements. This project is funded by the National Cyber Security Centre (NCSC) through UK Research Institute in Verified Trustworthy Software Systems (VeTSS) [29]. We thank Honeywell and D-RisQ for sharing of the industrial case.

A Block Theories

In this section, we define main theories of block diagrams in UTP.

theory *simu-contract-real*
imports
~~/*src*/*HOL*/*Word*/*Word*
utp-designs
begin

syntax
-*svid-des* :: *svid* ($\mathbf{v}_D$)

translations
-*svid-des* => Σ_D

Defined Simulink blocks using designs directly.

named-theorems *sim-blocks*

Functions used to define Simulink blocks via patterns.

named-theorems *f-blocks*

Defined Simulink blocks using functions and patterns.

named-theorems *f-sim-blocks*

SimBlock healthiness.

named-theorems *simblock-healthy*

recall-syntax

A.1 Additional Laws

theorem *ndesign-composition*:
((*p1* $\vdash_n$ *Q1*) ;; (*p2* $\vdash_n$ *Q2*)) = ((*p1* $\wedge$ $\neg$ $\lfloor$*Q1* ;; ($\neg$ $\lceil$*p2*$\rceil_<$)$\rfloor_<$) $\vdash_n$ (*Q1* ;; *Q2*))
apply (*ndes-simp*, *simp add*: *wp-upred-def*)
by (*rel-simp*)

lemma *list-equal-size2*:
fixes *x*
assumes *length*(*x*) = *2*
shows *x* = [*hd*(*x*)]•[*last*(*x*)]
proof −
have *1*: *x* = [*hd*(*x*)]•*tl*(*x*)
by (*metis append-Cons append-Nil assms hd-Cons-tl length-0-conv zero-not-eq-two*)
have *2*: *tl*(*x*) = [*last*(*x*)]
using *assms*
by (*metis One-nat-def 1 append-butlast-last-id append-eq-append-conv append-is-Nil-conv cancel-ab-semigroup-add-class.add-diff-cancel-left' length-Cons length-tl list.size*(*3*) *nat-1-add-1 not-Cons-self2*)
from *1* **and** *2* **show** *?thesis*
by *auto*
qed

theorem *ndesign-refinement*:
(*P1* $\vdash_n$ *Q1* $\sqsubseteq$ *P2* $\vdash_n$ *Q2*) $\longleftrightarrow$ (‘*P1* $\Rightarrow$ *P2*‘ $\wedge$ ‘$\lceil$*P1*$\rceil_<$ $\wedge$ *Q2* $\Rightarrow$ *Q1*‘)
by (*rel-auto*)

theorem *ndesign-refinement′*:
(*P1* $\vdash_n$ *Q1* $\sqsubseteq$ *P2* $\vdash_n$ *Q2*) $\longleftrightarrow$ (*P2* $\sqsubseteq$ *P1* $\wedge$ *Q1* $\sqsubseteq$ ($\lceil$*P1*$\rceil_<$ $\wedge$ *Q2*))
by (*meson ndesign-refinement refBy-order*)

lemma *assume-Ran*: *P* ; ; $[Ran(P)]^\top$ = *P*
apply (*rel-auto*)
done

fun *sum-list1* **where**
sum-list1 [] = *0* |
sum-list1 (*x*#*xs*) = (*sum-list1 xs* + *x*)

A.2 State Space

inouts: input and output signals, abstracted as a function from step numbers to a list of inputs or outputs where we use universal real number as the data type of signals.

alphabet *sim-state* =
inouts :: *nat* $\Rightarrow$ *real list*

A.3 Patterns

FBlock is a pattern to define a block with precondition, number of inputs, number of outputs, and postcondition.

definition *FBlock* ::
((*nat* $\Rightarrow$ *real list*) $\Rightarrow$ *nat* $\Rightarrow$ *bool*) $\Rightarrow$
nat $\Rightarrow$ *nat* $\Rightarrow$
((*nat* $\Rightarrow$ *real list*) $\Rightarrow$ *nat* $\Rightarrow$ (*real list*)) $\Rightarrow$
sim-state hrel-des **where**
[*sim-blocks*]: *FBlock pre m nn f* =
((∀ *n*::*nat* · («*pre*» (&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*) $\vdash_n$
((∀ *n*::*nat* ·
(($\#_u$($inouts («*n*»)$_a$)) =$_u$ «*m*») $\wedge$
(($\#_u$($inouts´ («*n*»)$_a$)) =$_u$ «*nn*») $\wedge$
(«*f*» ($inouts)$_a$ («*n*»)$_a$ =$_u$ ($inouts´ («*n*»)$_a$))) $\wedge$
(∀ *x* · (∀ *n*::*nat* · (($\#_u$(«*x*» («*n*»)$_a$) =$_u$ «*m*») $\Rightarrow$ ($\#_u$(«*f*» («*x*»)$_a$ («*n*»)$_a$) =$_u$ «*nn*»))))
(∗ *for any inputs, f always produces the same size output. Useful to prove FBlock-seq-comp* ∗)
))

lemma *pre-true* [*simp*]: (∀ *n*::*nat* ·(«λ*x n*. *True*» (&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*) = *true*
by (*rel-simp*)

A.4 Number of Inputs and Outputs

abbreviation *PrePost*(*P*) ≡ pre_D(*P*) $\wedge$ $post_D$(*P*)

SimBlock is a condition stating that a design is a Simulink block if it is feasible, and has *m* inputs and *n* outputs.

definition *SimBlock* :: *nat* $\Rightarrow$ *nat* $\Rightarrow$ *sim-state hrel-des* $\Rightarrow$ *bool*
where [*sim-blocks*]:

SimBlock m n P = ((*PrePost*(*P*) ≠ *false*) ∧ (∗ *This is stronger than just excluding abort and miracle, and also not the same as H4 feasibility* ∗)
((∀ *na* · #$_u$(&*inouts*(«*na*»)$_a$) =$_u$ «*m*») ⊑ *Dom*(*PrePost*(*P*))) ∧
((∀ *na* · #$_u$(&*inouts*(«*na*»)$_a$) =$_u$ «*n*») ⊑ *Ran*(*PrePost*(*P*)))(∗ ∧
(*P is* **N**)∗))

axiomatization
inps :: *sim-state hrel-des* ⇒ *nat* **and**
outps :: *sim-state hrel-des* ⇒ *nat*
where
inps-outps: (*SimBlock m n P*) ⟶ (*inps P* = *m*) ∧ (*outps P* = *n*)

A.5 Operators

A.5.1 Id

definition *f-Id*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Id x n* = [*hd*(*x n*)]

Id block: one input and one output, and the output is always equal to the input

definition *Id* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Id* = *FBlock* (λ*x n*. *True*) *1 1* (*f-Id*)

A.5.2 Parallel Composition

definition *mergeB* ::
((*sim-state des*, *sim-state des*, *sim-state des*) *mrg*,
sim-state des) *urel* (*B*$_M$) **where**
[*sim-blocks*]: *mergeB* = (($*ok*´ =$_u$ ($*0*−*ok* ∧ $*1*−*ok*)) ∧ (
(∀ *n*::*nat* · (($**v**$_D$:*inouts*´ («*n*»)$_a$) =$_u$ («*append*» ($*0*−**v**$_D$:*inouts* («*n*»)$_a$)$_a$ ($*1*−**v**$_D$:*inouts* («*n*»)$_a$)$_a$))
(∗∧ (#$_u$($**v**$_D$:*inouts*$_<$ («*n*»)$_a$) =$_u$ *2*)∗))))

takem: a block that just takes the first *nr2* inputs and ignores the remaining inputs.

definition *takem* :: *nat* ⇒ *nat* ⇒ *sim-state hrel-des* **where**
[*sim-blocks*]: *takem nr1 nr2* = ((«*nr2*» ≤$_u$ «*nr1*») ⊢$_n$
(∀ *n*::*nat* ·
(*uconj* ((#$_u$($*inouts* («*n*»)$_a$)) =$_u$ «*nr1*»)
(*uconj* ((#$_u$($*inouts*´ («*n*»)$_a$)) =$_u$ «*nr2*»)
(*true* ◁ («*nr2*» =$_u$ *0*) ▷ («*take*» («*nr2*»)$_a$ ($*inouts* («*n*»)$_a$)$_a$ =$_u$ ($*inouts*´ («*n*»)$_a$)))
))))

dropm: a block that just drops the first *nr2* inputs and outputs the remaining inputs.

definition *dropm* :: *nat* ⇒ *nat* ⇒ *sim-state hrel-des* **where**
[*sim-blocks*]: *dropm nr1 nr2* = ((«*nr2*» ≤$_u$ «*nr1*») ⊢$_n$
(∀ *n*::*nat* ·
(*uconj* ((#$_u$($*inouts* («*n*»)$_a$)) =$_u$ «*nr1*»)
(*uconj* ((#$_u$($*inouts*´ («*n*»)$_a$)) =$_u$ «*nr2*»)
(*true* ◁ («*nr2*» =$_u$ *0*) ▷ («*drop*» («*nr1*−*nr2*»)$_a$ ($*inouts* («*n*»)$_a$)$_a$ =$_u$ ($*inouts*´ («*n*»)$_a$)))
))))

We use the similar parallel-by-merge in UTP to implement parallel composition.

definition *sim-parallel* ::
sim-state hrel-des ⇒
sim-state hrel-des ⇒
sim-state hrel-des (**infixl** ‖$_B$ *60*)

where [*sim-blocks*]: $P \parallel_B Q =$
$(((takem\ (inps\ P + inps\ Q)\ (inps\ P))\ ;;\ P)$
$\parallel_{mergeB}$
$((dropm\ (inps\ P + inps\ Q)\ (inps\ Q))\ ;;\ Q))$

A.5.3 Sequential Composition

It is the same as the sequential composition for designs.

A.5.4 Feedback

definition *f-PreFD* :: $(nat \Rightarrow real)$ $(*$ *input signal*: *introduced by exists* $*)$
$\Rightarrow nat$ $(*$ *the input index number that is fed back from output.* $*)$
$\Rightarrow (nat \Rightarrow real\ list) \Rightarrow nat$
$\Rightarrow real\ list$ **where**
[*f-blocks*]: *f-PreFD x idx-fd inouts0 n* =
$(take\ idx\text{-}fd\ (inouts0\ n)) \bullet (x\ n) \#\ (drop\ idx\text{-}fd\ (inouts0\ n))$

definition *f-PostFD* ::
nat $(*$ *the input index number that is fed back from output.* $*)$
$\Rightarrow (nat \Rightarrow real\ list) \Rightarrow nat$
$\Rightarrow real\ list$ **where**
[*f-blocks*]: *f-PostFD idx-fd inouts0 n* =
$(take\ idx\text{-}fd\ (inouts0\ n)) \bullet (drop\ (idx\text{-}fd{+}1)\ (inouts0\ n))$

definition *PreFD* ::
$(nat \Rightarrow real)$ $(*$ *input signal*: *introduced by exists* $*)$
$\Rightarrow nat$ $(*$ *m* $*)$
$\Rightarrow nat$ $(*$ *the input index number that is fed back from output.* $*)$
$\Rightarrow$ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *PreFD x nr-of-inputs idx-fd* $= (true \vdash_n$
$(\forall\ n{::}nat \cdot ($
$((\#_u(\$inouts\ (\langle\langle n \rangle\rangle)_a)) =_u \langle\langle nr\text{-}of\text{-}inputs{-}1 \rangle\rangle) \wedge$
$((\#_u(\$inouts'\ (\langle\langle n \rangle\rangle)_a)) =_u \langle\langle nr\text{-}of\text{-}inputs \rangle\rangle) \wedge$
$(\$inouts'\ (\langle\langle n \rangle\rangle)_a =_u (\langle\langle f\text{-}PreFD\ x\ idx\text{-}fd \rangle\rangle\ (\$inouts)_a\ (\langle\langle n \rangle\rangle)_a))$
$)))$

definition *PostFD* :: $(nat \Rightarrow real)$ $(*$ *input signal*: *introduced by exists* $*)$
$\Rightarrow nat$ $(*$ *m* $*)$
$\Rightarrow nat$ $(*$ *the input index number that is fed back from output.* $*)$
$\Rightarrow$ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *PostFD x nr-of-inputs idx-fd* =
$(true \vdash_n$
$(\forall\ n{::}nat \cdot ($
$((\#_u(\$inouts\ (\langle\langle n \rangle\rangle)_a)) =_u \langle\langle nr\text{-}of\text{-}inputs \rangle\rangle) \wedge$
$((\#_u(\$inouts'\ (\langle\langle n \rangle\rangle)_a)) =_u \langle\langle nr\text{-}of\text{-}inputs{-}1 \rangle\rangle) \wedge$
$(\$inouts'\ (\langle\langle n \rangle\rangle)_a =_u (\langle\langle f\text{-}PostFD\ idx\text{-}fd \rangle\rangle\ (\$inouts)_a\ (\langle\langle n \rangle\rangle)_a)) \wedge$
$((\langle\langle nth \rangle\rangle\ (\$inouts\ (\langle\langle n \rangle\rangle)_a)_a\ (\langle\langle idx\text{-}fd \rangle\rangle)_a =_u \langle\langle x\ n \rangle\rangle))$
$)))$

The feedback operator *sim-feedback* is defined via existential quantification.

fun *sim-feedback* :: *sim-state hrel-des*

$\Rightarrow (nat * nat)$
$\Rightarrow$ *sim-state hrel-des* (**infixl** f_D *60*)
where
$P\ f_D\ (i1,o1) = (\exists\ (x) \cdot (PreFD\ x\ (inps\ P)\ i1\ ;;\ P\ ;;\ PostFD\ x\ (outps\ P)\ o1))$

Solvable checks if the supplied function for feedback is solvable according to the feedback signal from the output $o1$ to the input $i1$. A function is solvable if its feedback is feasible. Feedback may lead to algebraic loops but this condition states that algebraic loops are solvable.

definition *Solvable*:: *nat* (* *the input index for feedback* *)
$\Rightarrow$ *nat* (* *the output index for feedback* *)
$\Rightarrow$ *nat* (* *how many input signals* *)
$\Rightarrow$ *nat* (* *how many output signals* *)
$\Rightarrow ((nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow real\ list)$ (* *function* *)
$\Rightarrow$ *bool* **where**
Solvable i1 o1 m nn f = ((*i1* < *m* ∧ *o1* < *nn*) ∧
(∀ $inouts_0$. (∀ *x*. *length*($inouts_0$ *x*) = (*m*−*1*)) (* *For any* (*m*−*1*) *inputs* *)
⟶
(∃ *xx*. (* *there exists a signal xx that is the i1th input and the o1th output* *)
(∀ *n*. (*xx n* = (* *the o1th output* *)
(*f* (λ*n1*. *f-PreFD xx i1* $inouts_0$ *n1*
(* ((*take i1* ($inouts_0$ *n1*))•(*xx n1*)#(*drop i1* ($inouts_0$ *n1*))) *)
(* *assemble of inputs to make xx as i1th* *)
) *n*)!*o1*
)
))))

Solvable-unique: the feedback is solvable and has a unique solution.

definition *Solvable-unique*:: *nat* (* *the input index for feedback* *)
$\Rightarrow$ *nat* (* *the output index for feedback* *)
$\Rightarrow$ *nat* (* *how many input signals* *)
$\Rightarrow$ *nat* (* *how many output signals* *)
$\Rightarrow ((nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow real\ list)$ (* *function* *)
$\Rightarrow$ *bool* **where**
Solvable-unique i1 o1 m nn f = ((*i1* < *m* ∧ *o1* < *nn*) ∧
(∀ $inouts_0$. (∀ *x*. *length*($inouts_0$ *x*) = (*m*−*1*)) (* *For any* (*m*−*1*) *inputs* *)
⟶
(∃! (*xx*::*nat* ⇒ *real*). (* *there only exists a signal xx that is the i1th input and the o1th output* *)
(∀ *n*. (*xx n* = (* *the o1th output* *) (*f* (λ*n1*. *f-PreFD xx i1* $inouts_0$ *n1*) *n*)!*o1*)
)
)
)

Solution returns the solution for a feedback block. Here the solution means the signal that could satisfy the feedback constraint (the related input is equal to the output)

definition *Solution*:: *nat* (* *the input index for feedback* *)
$\Rightarrow$ *nat* (* *the output index for feedback* *)
$\Rightarrow$ *nat* (* *how many input signals* *)
$\Rightarrow$ *nat* (* *how many output signals* *)
$\Rightarrow ((nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow real\ list)$ (* *function* *)
$\Rightarrow (nat \Rightarrow real\ list)$
$\Rightarrow (nat \Rightarrow real)$ **where**
Solution i1 o1 m nn f $inouts_0$ =
(*SOME* (*xx*::*nat* ⇒ *real*).
((*(∀ *x*. *length*($inouts_0$ *x*) = (*m*−*1*)) (* *For any* (*m*−*1*) *inputs* *)

$\longrightarrow *)$
$(\forall\, n.\ (xx\ n =$
$(f\ (\lambda n1.\ f\text{-}PreFD\ xx\ i1\ inouts_0\ n1$
$(*\ ((take\ i1\ (inouts_0\ n1))\bullet[xx\ n1]\bullet(drop\ i1\ (inouts_0\ n1)))*)$
$)\ n)!o1$
$)$
$)))$

is-Solution checks if the supplied solution for a feedback block is a real solution.

definition *is-Solution*:: *nat* (∗ *the input index for feedback* ∗)
⇒ *nat* (∗ *the output index for feedback* ∗)
⇒ *nat* (∗ *how many input signals* ∗)
⇒ *nat* (∗ *how many output signals* ∗)
⇒ ((*nat* ⇒ *real list*) ⇒ *nat* ⇒ *real list*) (∗ *function* ∗)
⇒ ((*nat* ⇒ *real list*) ⇒ (*nat* ⇒ *real*))
⇒ *bool* **where**
is-Solution i1 o1 m nn f xx = (
$(\forall\, inouts_0.\ (\forall\, x.\ length(inouts_0\ x) = (m-1))$
$\longrightarrow (\forall\, n.\ (xx\ inouts_0\ n = (f\ (\lambda n1.\ f\text{-}PreFD\ (xx\ inouts_0)\ i1\ inouts_0\ n1)\ n)!o1))))$

A.5.5 Split

definition *f-Split2*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Split2 x n* = [*hd*(*x n*), *hd*(*x n*)]

definition *Split2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Split2* = *FBlock* (λ*x n. True*) *1 2* (*f-Split2*)

A.6 Blocks

A.6.1 Source

A.6.1.1 Constant Constant Block: no inputs and only one output.

definition *f-Const*:: *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Const x0 x n* = [*x0*]

definition *Const* :: *real* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Const c0* = *FBlock* (λ*x n. True*) *0 1* (*f-Const c0*)

A.6.2 Unit Delay

Unit Delay block: one parameter (initial output), one input and one output. And the output is equal to previous input if it is not the initial output; otherwise it is equal to the initial output.

definition *f-UnitDelay*:: *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-UnitDelay x0 x n* = [*if n* = *0 then x0 else hd*(*x* (*n*−*1*))]

definition *UnitDelay* :: *real* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *UnitDelay x0* = *FBlock* (λ*x n. True*) *1 1* (*f-UnitDelay x0*)

A.6.3 Discrete-Time Integrator

The Discrete-Time Integrator block: performs discrete-time integration or accumulation of signal. Integration (T=Ts) or Accumulation (T=1) methods: forward Euler, backward Euler, and trapezoidal methods.

DT-int-fw: integration by Forward Euler

fun *sum-by-fw-euler* :: *nat* ⇒ *real* ⇒ *real* ⇒ *real* ⇒ (*nat* ⇒ *real list*) ⇒ *real* **where**
sum-by-fw-euler 0 x0 K T x = x0 |
sum-by-fw-euler (*Suc m*) *x0 K T x* =
(*sum-by-fw-euler m x0 K T x*) + (*K* ∗ *T* ∗ (*hd*(*x m*)))

definition *f-DT-int-fw* :: *real* ⇒ *real* ⇒ *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DT-int-fw x0 K T x n* = [*sum-by-fw-euler n x0 K T x*]

definition *DT-int-fw* :: *real* ⇒ *real* ⇒ *real* ⇒
sim-state hrel-des **where**
[*f-sim-blocks*]: *DT-int-fw x0 K T* = *FBlock* (λ*x n. True*) *1 1* (*f-DT-int-fw x0 K T*)

DT-int-bw: integration by Backward Euler (Initial condition setting is set to State)

fun *sum-by-bw-euler* :: *nat* ⇒ *real* ⇒ *real* ⇒ *real* ⇒ (*nat* ⇒ *real list*) ⇒ *real* **where**
sum-by-bw-euler 0 x0 K T x = x0 + (*K* ∗ *T* ∗ (*hd*(*x 0*))) |
sum-by-bw-euler (*Suc m*) *x0 K T x* =
(*sum-by-bw-euler m x0 K T x*) + (*K* ∗ *T* ∗ (*hd*(*x m*)))

definition *f-DT-int-bw* :: *real* ⇒ *real* ⇒ *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DT-int-bw x0 K T x n* = [*sum-by-bw-euler n x0 K T x*]

definition *DT-int-bw* :: *real* ⇒ *real* ⇒ *real* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DT-int-bw x0 K T* = *FBlock* (λ*x n. True*) *1 1* (*f-DT-int-bw x0 K T*)

DT-int-trape: integration by Trapezoidal (Initial condition setting is set to State).

fun *sum-by-trape* **where**
sum-by-trape 0 x0 K T x = x0 + (*K* ∗ (*T div 2*) ∗ (*hd*(*x 0*))) |
sum-by-trape (*Suc m*) *x0 K T x* =
(*sum-by-trape m x0 K T x*) +
(*K* ∗ (*T div 2*) ∗ (*hd*(*x m*))) +
(*K* ∗ (*T div 2*) ∗ (*hd*(*x* (*Suc m*))))

definition *f-DT-int-trape* :: *real* ⇒ *real* ⇒ *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DT-int-trape x0 K T x n* = [*sum-by-trape n x0 K T x*]

definition *DT-int-trape* :: *real* ⇒ *real* ⇒ *real* ⇒
sim-state hrel-des **where**
[*f-sim-blocks*]: *DT-int-trape x0 K T* = *FBlock* (λ*x n. True*) *1 1* (*f-DT-int-trape x0 K T*)

A.6.4 Sum

The Sum block performs addition or subtraction on its inputs.

sum-by-sign: Summation or subtraction of a list according to their corresponding signs. It requires the length of inputs are equal to that of signs (true for +)

fun *sum-by-sign* **where**
sum-by-sign [] - = *0* |
sum-by-sign (*x*#*xs*) (*s*#*ss*) = (*if s then* (*sum-by-sign xs ss* + *x*) *else* (*sum-by-sign xs ss* − *x*))

definition *f-SumSub*:: *bool list* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-SumSub signs x n* = [*sum-by-sign* (*x n*) *signs*]

SumSub: summation or subtraction according to supplied signs.

definition *SumSub* :: *nat* ⇒ *bool list* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *SumSub nr signs* = *FBlock* (λ*x n*. *True*) *nr 1* (*f-SumSub signs*)

Sum2 is a special case of *SumSub* and it adds up two inputs

definition *f-Sum2*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Sum2 x n* = [*hd*(*x n*) + *hd*(*tl*(*x n*))]

definition *Sum2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Sum2* = *FBlock* (λ*x n*. *True*) *2 1* (*f-Sum2*)

SumSub2 is a special case of *SumSub* and it is equal to subtract the second input from the first input.

definition *f-SumSub2* :: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-SumSub2 x n* = [*hd*(*x n*) − *hd*(*tl*(*x n*))]

definition *SumSub2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *SumSub2* = *FBlock* (λ*x n*. *True*) *2 1* (*f-SumSub2*)

SubSum2 is a special case of *SumSub* and it is equal to subtract the first input from the second input.

definition *f-SubSum2* :: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-SubSum2 x n* = [− *hd*(*x n*) + *hd*(*tl*(*x n*))]

definition *SubSum2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *SubSum2* = *FBlock* (λ*x n*. *True*) *2 1* (*f-SubSum2*)

A.6.5 Product

The Product block performs multiplication and division.

not-divide-by-zero is a predicate in assumption. For signs, true denotes * and false for /.

fun *not-divide-by-zero* **where**
not-divide-by-zero [] - = *True* |
not-divide-by-zero (*x*#*xs*) (*s*#*ss*) =
(*HOL.conj* (*not-divide-by-zero xs ss*) (*if s then True else* (*x* ≠ *0*)))

product-by-sign: multiplies or divides by signs.

fun *product-by-sign* **where**
product-by-sign [] - = *1* |
product-by-sign (*x*#*xs*) (*s*#*ss*) =
(*if s then* (*product-by-sign xs ss* ∗ *x*) *else* (*product-by-sign xs ss* / *x*))

definition *f-ProdDiv* :: *bool list* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-ProdDiv signs x n* = [*product-by-sign* (*x n*) *signs*]

definition *f-no-div-by-zero* :: *bool list* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ *bool* **where**
[*f-blocks*]: *f-no-div-by-zero signs x n* = *not-divide-by-zero* (*x n*) *signs*

ProdDiv has additional precondition that assumes all values of the divisor inputs are not equal to zero.

definition *ProdDiv* :: *nat* ⇒ *bool list* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *ProdDiv nr signs* = *FBlock* (λ*x n*. (*f-no-div-by-zero signs x n*)) *nr 1* (*f-ProdDiv signs*)

Mul2 is a special case of *ProdDiv* and it multiplies two inputs.

definition *f-Mul2*:: $(nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow (real\ list)$ **where**
[*f-blocks*]: $f\text{-}Mul2\ x\ n = [hd(x\ n) * hd(tl(x\ n))]$

definition *Mul2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: $Mul2 = FBlock\ (\lambda x\ n.\ True)\ 2\ 1\ (f\text{-}Mul2)$

Div2 is a special case of *ProdDiv* and the first input is divided by the second input.

definition *f-Div2*:: $(nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow (real\ list)$ **where**
[*f-blocks*]: $f\text{-}Div2\ x\ n = [hd(x\ n)\ /\ hd(tl(x\ n))]$

definition *Div2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: $Div2 = FBlock\ (\lambda x\ n.\ (hd(tl(x\ n)) \neq 0))\ 2\ 1\ (f\text{-}Div2)$

A.6.6 Gain

definition *f-Gain*:: $real \Rightarrow (nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow (real\ list)$ **where**
[*f-blocks*]: $f\text{-}Gain\ k\ x\ n = [k * hd(x\ n)]$

definition *Gain* :: $real \Rightarrow$ *sim-state hrel-des* **where**
[*f-sim-blocks*]: $Gain\ k = FBlock\ (\lambda x\ n.\ True)\ 1\ 1\ (f\text{-}Gain\ k)$

A.6.7 Saturation

definition *f-Limit*:: $real \Rightarrow real \Rightarrow (nat \Rightarrow real\ list) \Rightarrow nat \Rightarrow (real\ list)$ **where**
[*f-blocks*]: $f\text{-}Limit\ ymin\ ymax\ x\ n =$
$[if\ ymin > hd(x\ n)\ then\ ymin\ else$
$(if\ ymax < hd(x\ n)\ then\ ymax\ else\ hd(x\ n))]$

definition *Limit* :: $real \Rightarrow real \Rightarrow$ *sim-state hrel-des* **where**
[*f-sim-blocks*]: $Limit\ ymin\ ymax = FBlock\ (\lambda x\ n.\ True)\ 1\ 1\ (f\text{-}Limit\ ymin\ ymax)$

A.6.8 MinMax

MinList: return the minimum number from a list of numbers.

fun *MinList* **where**
$MinList\ []\ minx = minx\ |$
$MinList\ (x\#xs)\ minx =$
$(if\ x < minx$
$then\ MinList\ xs\ x$
$else\ MinList\ xs\ minx)$

The input list must not be empty.

abbreviation $MinLst \equiv (\lambda\ lst\ .\ MinList\ lst\ (hd(lst)))$

MaxList: return the maximum number from a list of numbers.

fun *MaxList* **where**
$MaxList\ []\ maxx = maxx\ |$
$MaxList\ (x\#xs)\ maxx =$
$(if\ x > maxx$
$then\ MaxList\ xs\ x$
$else\ MaxList\ xs\ maxx)$

The input list must not be empty.

abbreviation $MaxLst \equiv (\lambda\ lst\ .\ MaxList\ lst\ (hd(lst)))$

MinN returns the minimum value in the inputs.

definition *f-MinN*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-MinN x n* = [*MinLst* (*x n*)]

definition *MinN* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *MinN nr* = *FBlock* (λ*x n*. *True*) *nr 1* (*f-MinN*)

definition *f-Min2*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Min2 x n* = [*min* (*hd*(*x n*)) (*hd*(*tl*(*x n*)))]

definition *Min2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Min2* = *FBlock* (λ*x n*. *True*) *2 1* (*f-Min2*)

MaxN returns the maximum value in the inputs.

definition *f-MaxN*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-MaxN x n* = [*MaxLst* (*x n*)]

definition *MaxN* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *MaxN nr* = *FBlock* (λ*x n*. *True*) *nr 1* (*f-MaxN*)

definition *f-Max2*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Max2 x n* = [*max* (*hd*(*x n*)) (*hd*(*tl*(*x n*)))]

definition *Max2* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Max2* = *FBlock* (λ*x n*. *True*) *2 1* (*f-Max2*)

A.6.9 Rounding

The Rounding Function block applies a rounding function to the input signal to produce the output signal.

RoundFloor rounds inputs using the floor function.

definition *f-RoundFloor*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RoundFloor x n* = [*real-of-int* ⌊(*hd*(*x n*))⌋]

definition *RoundFloor* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RoundFloor* = *FBlock* (λ*x n*. *True*) *1 1* (*f-RoundFloor*)

RoundCeil rounds inputs using the ceil function.

definition *f-RoundCeil*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RoundCeil x n* = [*real-of-int* ⌈(*hd*(*x n*))⌉]

definition *RoundCeil* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RoundCeil* = *FBlock* (λ*x n*. *True*) *1 1* (*f-RoundCeil*)

A.6.10 Logic Operators

The Logical Operator block performs the specified logical operation on its inputs.

- It supports seven operators: AND, OR, NAND, NOR, XOR, NXOR, NOT;
- An input value is TRUE (1) if it is nonzero and FALSE (0) if it is zero;
- An output value is 1 if TRUE and 0 if FALSE;

A.6.10.1 AND

fun *LAnd* :: *real list* ⇒ *bool* **where**
LAnd [] = *True* |
LAnd (*x*#*xs*) = (*if x = 0 then False else* (*LAnd xs*))

definition *f-LopAND*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopAND x n* = [*if LAnd* (*x n*) *then 1 else 0*]

definition *LopAND* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopAND m* = *FBlock* (λ*x n*. *True*) *m 1* (*f-LopAND*)

A.6.10.2 OR

fun *LOr* :: *real list* ⇒ *bool* **where**
LOr [] = *False* |
LOr (*x*#*xs*) = (*if x* ≠ *0 then True else* (*LOr xs*))

definition *f-LopOR*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopOR x n* = [*if LOr* (*x n*) *then 1 else 0*]

definition *LopOR* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopOR m* = *FBlock* (λ*x n*. *True*) *m 1* (*f-LopOR*)

A.6.10.3 NAND

fun *LNand* :: *real list* ⇒ *bool* **where**
LNand [] = *False* |
LNand (*x*#*xs*) = (*if x = 0 then True else* (*LNand xs*))

definition *f-LopNAND*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopNAND x n* = [*if LNand* (*x n*) *then 1 else 0*]

definition *LopNAND* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopNAND m* = *FBlock* (λ*x n*. *True*) *m 1* (*f-LopNAND*)

A.6.10.4 NOR

fun *LNor* :: *real list* ⇒ *bool* **where**
LNor [] = *True* |
LNor (*x*#*xs*) = (*if x* ≠ *0 then False else* (*LNand xs*))

definition *f-LopNOR*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopNOR x n* = [*if LNor* (*x n*) *then 1 else 0*]

definition *LopNOR* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopNOR m* = *FBlock* (λ*x n*. *True*) *m 1* (*f-LopNOR*)

A.6.10.5 XOR

fun *LXor* :: *real list* ⇒ *nat* ⇒ *bool* **where**
LXor [] *t* = (*if t mod 2 = 0 then False else True*) |
LXor (*x*#*xs*) *t* = (*if x* ≠ *0 then* (*LXor xs* (*t*+*1*)) *else* (*LXor xs t*))

lemma *LXor* [*0*, *1*, *1*] *0* = *False*
by *auto*

lemma *LXor* [*0*, *1*, *1*, *1*] *0* = *True*
by *auto*

definition *f-LopXOR*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopXOR x n* = [*if LXor* (*x n*) *0 then 1 else 0*]

definition *LopXOR* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopXOR m* = *FBlock* (λ*x n*. *True*) *m 1* (*f-LopXOR*)

A.6.10.6 NXOR

fun *LNxor* :: *real list* ⇒ *nat* ⇒ *bool* **where**
LNxor [] *t* = (*if t mod 2 = 0 then True else False*) |
LNxor (*x*#*xs*) *t* = (*if x* ≠ *0 then* (*LNxor xs* (*t*+*1*)) *else* (*LNxor xs t*))

lemma *LNxor* [*0*, *1*, *1*] *0* = *True*
by *auto*

lemma *LNxor* [*0*, *1*, *1*, *1*] *0* = *False*
by *auto*

definition *f-LopNXOR*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopNXOR x n* = [*if LNxor* (*x n*) *0 then 1 else 0*]

definition *LopNXOR* :: *nat* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopNXOR m* = *FBlock* (λ*x n*. *True*) *m 1* (*f-LopNXOR*)

A.6.10.7 NOT

definition *f-LopNOT*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-LopNOT x n* = [*if hd*(*x n*) = *0 then 1 else 0*]

definition *LopNOT* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *LopNOT* = *FBlock* (λ*x n*. *True*) *1 1* (*f-LopNOT*)

A.6.11 Relational Operator

The Relational Operator block performs specified relational operation on inputs.

- It supports six operators for two-input mode: ==, ~=, <, <=, >, >=;
- An output value is 1 if TRUE and 0 if FALSE;

A.6.11.1 Equal ==

definition *f-RopEQ*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RopEQ x n* = [*if hd*(*x n*) = *hd*(*tl*(*x n*)) *then 1 else 0*]

definition *RopEQ* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RopEQ* = *FBlock* (λ*x n*. *True*) *2 1* (*f-RopEQ*)

A.6.11.2 Notequal ~=

definition *f-RopNEQ*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RopNEQ x n* = [*if hd*(*x n*) = *hd*(*tl*(*x n*)) *then 0 else 1*]

definition *RopNEQ* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RopNEQ* = *FBlock* (λ*x n*. *True*) *2 1* (*f-RopNEQ*)

A.6.11.3 Less Than <

definition *f-RopLT*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RopLT x n* = [*if hd*(*x n*) < *hd*(*tl*(*x n*)) *then 1 else 0*]

definition *RopLT* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RopLT* = *FBlock* (λ*x n*. *True*) *2 1* (*f-RopLT*)

A.6.11.4 Less Than or Equal to <=

definition *f-RopLE*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RopLE x n* = [*if hd*(*x n*) ≤ *hd*(*tl*(*x n*)) *then 1 else 0*]

definition *RopLE* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RopLE* = *FBlock* (λ*x n*. *True*) *2 1* (*f-RopLE*)

A.6.11.5 Greater Than > definition *f-RopGT*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RopGT x n* = [*if hd*(*x n*) > *hd*(*tl*(*x n*)) *then 1 else 0*]

definition *RopGT* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RopGT* = *FBlock* (λ*x n*. *True*) *2 1* (*f-RopGT*)

A.6.11.6 Greater Than or Equal to >= definition *f-RopGE*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-RopGE x n* = [*if hd*(*x n*) ≥ *hd*(*tl*(*x n*)) *then 1 else 0*]

definition *RopGE* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *RopGE* = *FBlock* (λ*x n*. *True*) *2 1* (*f-RopGE*)

A.6.12 Switch

The Switch block switches the output between the first input and the third input based on the value of the second input.

- The first and the third inputs are data inputs;
- The second is the control input.
- Criteria for passing first input: $u2 \geq Threshold$, $u2 > Threshold$, or $u2 = 0$;

Switch1: criteria is $u2 \geq Threshold$

definition *f-Switch1*:: *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Switch1 th x n* = [*if* (*x n*)!*1* ≥ *th then* (*x n*)!*0 else* (*x n*)!*2*]

definition *Switch1* :: *real* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Switch1 th* = *FBlock* (λ*x n*. *True*) *3 1* (*f-Switch1 th*)

Switch2: criteria is $u2 > Threshold$

definition *f-Switch2*:: *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Switch2 th x n* = [*if* (*x n*)!*1* > *th then* (*x n*)!*0 else* (*x n*)!*2*]

definition *Switch2* :: *real* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Switch2 th* = *FBlock* (λ*x n*. *True*) *3 1* (*f-Switch2 th*)

Switch3: criteria is $u2 = 0$

definition *f-Switch3*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Switch3 x n* = [*if* (*x n*)!*1* = *0 then* (*x n*)!*2 else* (*x n*)!*0*]

definition *Switch3* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Switch3* = *FBlock* (λ*x n*. *True*) *3 1* (*f-Switch3*)

A.6.13 Data Type Conversion

Data Type Conversion: converts an input signal to the specified data type.

Integer round number towards zero

definition *RoundZero* :: *real* ⇒ *int* **where**
RoundZero x = (*if x* ≥ (*0*::*real*) *then* ⌊*x*⌋ *else* ⌈*x*⌉)

lemma *RoundZero 1.1 = 1*
apply (*simp add*: *RoundZero-def*)
done

lemma *RoundZero* (*−1.1*) = *−1*
apply (*simp add*: *RoundZero-def*)
done

int8: convert int to int8.

definition *int8* :: *int* ⇒ *int* **where**
int8 x = ((*x*+*128*) *mod 256*) − *128*

int16: convert int to int16.

definition *int16* :: *int* ⇒ *int* **where**
int16 x = ((*x*+*32768*) *mod 65536*) − *32768*

int32: convert int to int32.

definition *int32* :: *int* ⇒ *int* **where**
int32 x = ((*x*+*2147483648*) *mod 4294967296*) − *2147483648*

lemma *int32-eq*:
assumes *x* ≥ *0* ∧ *x* < *2147483648*
shows *int32 x* = *x*
apply (*simp add*: *int32-def*)
using *assms* **by** (*smt int-mod-eq*)

lemma *int8* (*−1*) = *−1*
by (*simp add*: *int8-def*)

lemma *int8* (*−128*) = *−128*
by (*simp add*: *int8-def*)

lemma *int8* (*−129*) = *127*
by (*simp add*: *int8-def*)

lemma *int8* (*129*) = *−127*
by (*simp add*: *int8-def*)

lemma *int8* (*−378*) = *−122*
by (*simp add*: *int8-def*)

lemma *int8* (*378*) = *122*
by (*simp add*: *int8-def*)

uint8: convert int to uint8

definition *uint8* :: *int* ⇒ *int* **where**
uint8 x = *x mod 256*

lemma *uint8* (*−1*) = *255*
by (*simp add*: *uint8-def*)

uint16: convert int to uint16

definition *uint16* :: *int* ⇒ *int* **where**
uint16 x = *x mod 65536*

uint32: convert int to uint32

definition *uint32* :: *int* ⇒ *int* **where**
uint32 x = *x mod 4294967296*

lemma (*uint32 4294967296*) = *0*
by (*simp add*: *uint32-def*)

lemma (*uint32 4294967295*) = *4294967295*
by (*simp add*: *uint32-def*)

lemma (*uint32* (−*1*)) = *4294967295*
by (*simp add*: *uint32-def*)

lemma (*uint32* (−*4294967298*)) = *4294967294*
by (*simp add*: *uint32-def*)

DataTypeConvUint32Zero: convert to uint32 and round number towards zero.

definition *f-DTConvUint32Zero*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DTConvUint32Zero x n* = [*real-of-int* (*uint32* (*RoundZero*(*hd* (*x n*))))]

definition *DataTypeConvUint32Zero* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DataTypeConvUint32Zero* = *FBlock* (λ*x n*. *True*) *1 1* (*f-DTConvUint32Zero*)

DataTypeConvInt32Zero: convert to int32 and round number towards zero.

definition *f-DTConvInt32Zero*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DTConvInt32Zero x n* = [*real-of-int* (*int32* (*RoundZero*(*hd* (*x n*))))]

definition *DataTypeConvInt32Zero* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DataTypeConvInt32Zero* = *FBlock* (λ*x n*. *True*) *1 1* (*f-DTConvInt32Zero*)

DataTypeConvUint32Floor: convert to uint32 and round number using floor.

definition *f-DTConvUint32Floor*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DTConvUint32Floor x n* = [*real-of-int* (*uint32* (⌊(*hd* (*x n*))⌋))]

definition *DataTypeConvUint32Floor* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DataTypeConvUint32Floor* = *FBlock* (λ*x n*. *True*) *1 1* (*f-DTConvUint32Floor*)

DataTypeConvInt32Floor: convert to int32 and round number using floor.

definition *f-DTConvInt32Floor*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DTConvInt32Floor x n* = [*real-of-int* (*int32* (⌊(*hd* (*x n*))⌋))]

definition *DataTypeConvInt32Floor* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DataTypeConvInt32Floor* = *FBlock* (λ*x n*. *True*) *1 1* (*f-DTConvInt32Floor*)

DataTypeConvUint32Ceil: convert to uint32 and round number using ceil.

definition *f-DTConvUint32Ceil*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DTConvUint32Ceil x n* = [*real-of-int* (*uint32* (⌈(*hd* (*x n*))⌉))]

definition *DataTypeConvUint32Ceil* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DataTypeConvUint32Ceil* = *FBlock* (λ*x n*. *True*) *1 1* (*f-DTConvUint32Ceil*)

DataTypeConvInt32Ceil: convert to int32 and round number using ceil.

definition *f-DTConvInt32Ceil*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-DTConvInt32Ceil x n* = [*real-of-int* (*int32* (⌈(*hd* (*x n*))⌉))]

definition *DataTypeConvInt32Ceil* :: *sim-state hrel-des* **where**
[*f-sim-blocks*]: *DataTypeConvInt32Ceil* = *FBlock* (λ*x n*. *True*) *1 1* (*f-DTConvInt32Ceil*)

A.6.14 Initial Condition (IC)

The IC block sets the initial condition of the signal at its input port. The block does this by outputting the specified initial condition when you start the simulation, regardless of the actual value of the input signal. Thereafter, the block outputs the actual value of the input signal.

definition *f-IC*:: *real* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-IC x0 x n* = [*if n* = *0 then x0 else hd*(*x n*)]

definition *IC* :: *real* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *IC x0* = *FBlock* (λ*x n*. *True*) *1 1* (*f-IC x0*)

A.6.15 Router Block

A new introduced block to route signals: the same number of inputs and outputs but in different orders.

fun *assembleOutput*:: *real list* ⇒ *nat list* ⇒ *real list* **where**
assembleOutput ins [] = [] |
assembleOutput ins (*x*#*xs*) = (*ins*!*x*)#(*assembleOutput ins* (*xs*))

definition *f-Router*:: *nat list* ⇒ (*nat* ⇒ *real list*) ⇒ *nat* ⇒ (*real list*) **where**
[*f-blocks*]: *f-Router routes x n* = *assembleOutput* (*x n*) *routes*

lemma *f-Router* [*2*,*0*,*1*] (λ*na*. [*11*, *22*, *33*]) *n* = [*33*, *11*, *22*]
by (*simp add*: *f-blocks*)

definition *Router* :: *nat* ⇒ *nat list* ⇒ *sim-state hrel-des* **where**
[*f-sim-blocks*]: *Router nn routes* = *FBlock* (λ*x n*. *True*) *nn nn* (*f-Router routes*)

end

B Block Laws

In this section, many theorems and laws are proved to facilitate application of our theories in Simulink block diagrams.

theory *simu-contract-real-laws*
imports
simu-contract-real
begin

— timeout in seconds
declare [[*smt-timeout* = *600*]]

B.1 Additional Laws

list-len-avail: there always exists some signals that could have a specific size.

lemma *list-len-avail*:
∀ *x*≥*0*. (∃ (*xx*::*nat*⇒*real list*). ∀ *n*. *length* (*xx n*) = *x*)

apply (*rule allI*)
apply (*auto*)
apply (*induct-tac x*)
apply (*rule-tac x* = λ*na*. [] **in** *exI*, *simp*)
apply (*auto*)
by (*rule-tac x* = λ*na*. *0*#(*xx na*) **in** *exI*, *simp*)

list-len-avail: there always exists some signals that could have a specific size and the value of each signal is equal to an arbitrary real number.

lemma *list-len-avail'*:
∀ *r*::*real*. ∀ *x*≥*0*. (∃(*xx*::*nat*⇒*real list*). (∀ *n*. (*length* (*xx n*) = *x*) ∧ (∀ *y*::*nat*<*x*. ((*xx n*)!*y* = *r*))))
apply (*rule allI*)
apply (*auto*)
apply (*induct-tac x*)
apply (*rule-tac x* = λ*na*. [] **in** *exI*, *simp*)
apply (*auto*)
apply (*rule-tac x* = λ*na*. *r*#(*xx na*) **in** *exI*, *simp*)
using *less-Suc-eq-0-disj* **by** *auto*

sum-hd-signal sums up a signal's current value and all past values.

fun *sum-hd-signal*:: (*nat* ⇒ *real list*) ⇒ *nat* ⇒ *real* **where**
sum-hd-signal x 0 = *hd*(*x 0*) |
sum-hd-signal x (*Suc n*) = *hd*(*x* (*Suc n*)) + *sum-hd-signal x* (*n*)

remove-at removes the ith element from a list.

abbreviation *remove-at* ≡ (λ*lst i*. (*take* (*i*) *lst*)•(*drop* (*i*+*1*) *lst*))

lemma *remove-at* [] *1* = [] **by** *simp*

lemma *remove-at* [*2*,*3*,*4*] *1* = [*2*,*4*] **by** *simp*

fun-eq: two functions are equal as long as they are equal in all their domains (total functions).

lemma *fun-eq*:
assumes ∀ *x*. *f x* = *g x*
shows *f* = *g*
by (*simp add*: *assms ext*)

fun-eq': two functions are equal in all their domains then they are equal functions. (total functions).

lemma *fun-eq'*:
assumes *f* = *g*
shows ∀ *x*. (*f x* = *g x*)
by (*simp add*: *assms*)

lemma *fun-neq*:
assumes ∀ *x*. ¬ (*f x* = *g x*)
shows ¬ *f* = *g*
using *assms* **by** *auto*

ref-eq: two predicates are equal as long as they are refined by each other.

lemma *ref-eq*:
assumes *P* ⊑ *Q*
assumes *Q* ⊑ *P*
shows *P* = *Q*

by (*simp add*: *antisym assms*(*1*) *assms*(*2*))

lemma *hd-drop-m*:
$\forall (x{::}nat \Rightarrow real\ list)\ n{::}nat.\ length(x\ n) > m \longrightarrow (hd\ (drop\ m\ (x\ n)) = x\ n!m)$
using *hd-drop-conv-nth* **by** *blast*

lemma *hd-take-m*:
$m > 0 \longrightarrow (\forall (x{::}nat \Rightarrow real\ list)\ n{::}nat.\ (hd\ (take\ m\ (x\ n)) = hd(x\ n)))$
by (*metis append-take-drop-id hd-append2 less-numeral-extra*(*3*) *take-eq-Nil*)

lemma *hd-tl-take-m*:
$m > 1 \longrightarrow (\forall (x{::}nat \Rightarrow real\ list)\ n{::}nat.\ (hd\ (tl\ (take\ m\ (x\ n))) = hd(tl(x\ n))))$
by (*metis hd-conv-nth less-numeral-extra*(*3*) *nth-take take-eq-Nil tl-take zero-less-diff*)

B.2 SimBlock healthiness

lemma *SimBlock-FBlock* [*simblock-healthy*]:
assumes *s1*: $\exists\, inouts_v\ inouts_v'.$
$\forall\, x.\ length(inouts_v'\ x) = n \wedge$
$length(inouts_v\ x) = m \wedge$
$f\ inouts_v\ x = inouts_v'\ x$
assumes *s2*: $\forall\, x\ na.\ length(x\ na) = m \longrightarrow length(f\ x\ na) = n$
shows *SimBlock m n* (*FBlock* ($\lambda x\ n.\ True$) *m n f*)
apply (*simp add*: *SimBlock-def FBlock-def*)
apply (*rel-auto*)
using *s1* **apply** *blast*
by (*simp add*: *s2*)

lemma *SimBlock-FBlock'* [*simblock-healthy*]:
assumes *s1*: $\exists\, inouts_v.\ (\forall\, x.\ p1\ inouts_v\ x) \wedge$
$(\exists\ inouts_v'.$
$\forall\, x.\ length(inouts_v'\ x) = n \wedge$
$length(inouts_v\ x) = m \wedge$
$f\ inouts_v\ x = inouts_v'\ x)$
assumes *s2*: $\forall\, x\ na.\ length(x\ na) = m \longrightarrow length(f\ x\ na) = n$
shows *SimBlock m n* (*FBlock* (*p1*) *m n f*)
apply (*simp add*: *SimBlock-def FBlock-def*)
apply (*rel-auto*)
using *s1 s2* **by** *blast*

lemma *SimBlock-FBlock-fn* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* (*FBlock* ($\lambda x\ n.\ True$) *m n f*)
shows ($\forall\, x\ xa.\ length(x\ xa) = m \longrightarrow length(f\ x\ xa) = n$)
proof −
have *1*: $PrePost((FBlock\ (\lambda x\ n.\ True)\ m\ n\ f)) \neq false$
using *s1 SimBlock-def*
by *blast*
then show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
done
qed

lemma *SimBlock-FBlock-fn'* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* (*FBlock* (*p*) *m n f*)
shows ($\forall\, x\ xa.\ length(x\ xa) = m \longrightarrow length(f\ x\ xa) = n$)

proof −
have *1*: *PrePost*((*FBlock* (*p*) *m n f*)) ≠ *false*
using *s1 SimBlock-def*
by *blast*
then show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
done
qed

lemma *SimBlock-FBlock-p* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* (*FBlock* (*p*) *m n f*)
shows ∃ $inouts_v$. ∀ *x*. *p* $inouts_v$ *x* ∧ *length*($inouts_v$ *x*) = *m*
proof −
have *1*: *PrePost*((*FBlock* (*p*) *m n f*)) ≠ *false*
using *s1 SimBlock-def*
by *blast*
then show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
by *blast*
qed

lemma *SimBlock-FBlock-p-f* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* (*FBlock* (*p*) *m n f*)
shows ∃ $inouts_v$. ∀ *x*. *p* $inouts_v$ *x* ∧
(∃ $inouts_v'$. ∀ *x*. *length*($inouts_v'$ *x*) = *n* ∧ *length*($inouts_v$ *x*) = *m* ∧ *f* $inouts_v$ *x* = $inouts_v'$ *x*)
proof −
have *1*: *PrePost*((*FBlock* (*p*) *m n f*)) ≠ *false*
using *s1 SimBlock-def*
by *blast*
then show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
by *blast*
qed

lemma *FBlock-eq*:
assumes *f1* = *f2*
shows *FBlock p-f m n f1* = *FBlock p-f m n f2*
using *assms* **by** *simp*

lemma *FBlock-eq′*:
assumes ∀ (*x*::*nat* ⇒ *real list*) *n*. *length*(*x n*) = *m* ⟶ *f1 x n* = *f2 x n*
shows *FBlock p-f m n f1* = *FBlock p-f m n f2*
apply (*simp add*: *FBlock-def*)
apply (*rule ref-eq*)
apply (*rel-simp*)
using *assms* **apply** *simp*
apply (*rel-simp*)
using *assms* **by** *metis*

lemma *FBlock-eq″*:
assumes *s1*: ∀ (*x*::*nat* ⇒ *real list*) *n*. (∀ *na*. *length*(*x na*) = *m*) ⟶ *f1 x n* = *f2 x n*

assumes *s2*: $\forall\,(x{::}nat \Rightarrow real\ list)\ na.\ length(f1\ x\ na) = n$
assumes *s3*: $\forall\,(x{::}nat \Rightarrow real\ list)\ na.\ length(f2\ x\ na) = n$
shows *FBlock p-f m n f1 = FBlock p-f m n f2*
apply (*simp add*: *FBlock-def*)
apply (*rule ref-eq*)
apply (*rel-simp*)
apply (*rule conjI*)
apply (*simp add*: *assms*)
using *assms* **apply** *blast*
apply (*rel-simp*)
using *assms* **by** *metis*

B.3 inps and outps

lemma *inps-P*:
assumes *SimBlock m n P*
shows *inps P = m*
using *assms inps-outps* **by** *auto*

lemma *outps-P*:
assumes *SimBlock m n P*
shows *outps P = n*
using *assms inps-outps* **by** *auto*

lemma *SimBlock-implies-not-PQ* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* $(P \vdash_n Q)$
shows $(\lceil P \rceil_< \wedge Q) \neq false$
using *SimBlock-def s1* **by** *auto*

lemma *SimBlock-implies-not-P* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* $(P \vdash_n Q)$
shows $\lceil P \rceil_< \neq false$
using *SimBlock-def s1*
by (*metis SimBlock-implies-not-PQ aext-false ndesign-def ndesign-refinement' true-conj-zero*(*1*)
utp-pred-laws.bot.extremum utp-pred-laws.inf.orderE)

lemma *SimBlock-implies-not-P'* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* $(P \vdash_n Q)$
shows $P \neq false$
using *SimBlock-def s1*
by (*metis SimBlock-implies-not-PQ aext-false ndesign-def*
utp-pred-laws.bot.extremum utp-pred-laws.inf.orderE)

lemma *SimBlock-implies-not-P''* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* $(P \vdash_n Q)$
shows $\exists\, inouts_v\ inouts_v'.\ [\![\lceil P \rceil_<]\!]_e\ (\langle inouts_v = inouts_v \rangle, \langle inouts_v = inouts_v' \rangle)$
using *SimBlock-implies-not-P*
by (*metis* (*mono-tags*, *hide-lams*) *bot-bool-def bot-uexpr.rep-eq false-upred-def old.unit.exhaust s1*
sim-state.cases-scheme surj-pair udeduct-eqI)

lemma *SimBlock-implies-not-P-cond* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* $(P \vdash_r Q)$
assumes *s2*: $out\alpha \sharp P$
shows $\forall\, inouts_v\ inouts_v'\ inouts_v''.$
$[\![P]\!]_e\ (\langle inouts_v = inouts_v \rangle, \langle inouts_v = inouts_v'' \rangle) = [\![P]\!]_e\ (\langle inouts_v = inouts_v \rangle, \langle inouts_v = inouts_v' \rangle)$

using *SimBlock-implies-not-P s1 s2*
by (*rel-simp*)

lemma *SimBlock-implies-not-Q* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* ($P \vdash_n Q$)
shows $Q \neq false$
using *SimBlock-def s1* **by** *auto*

lemma *SimBlock-implies-not-Q'* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* ($P \vdash_n Q$)
shows $\exists\, inouts_v\ inouts_v'.\ [\![Q]\!]_e\ ((|inouts_v = inouts_v|), (|inouts_v = inouts_v'|))$
using *SimBlock-implies-not-Q*
by (*metis* (*mono-tags*, *hide-lams*) *bot-bool-def bot-uexpr.rep-eq false-upred-def old.unit.exhaust s1 sim-state.cases-scheme surj-pair udeduct-eqI*)

lemma *SimBlock-implies-not-PQ'* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* ($P \vdash_n Q$)
shows $\exists\, inouts_v\ inouts_v'.\ ([\![P]\!]_e\ ((|inouts_v = inouts_v|)) \wedge$
$[\![Q]\!]_e\ ((|inouts_v = inouts_v|), (|inouts_v = inouts_v'|)))$
using *s1 SimBlock-implies-not-PQ* **apply** (*rel-simp*)
done

lemma *SimBlock-implies-mP* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* ($P \vdash_n Q$)
shows $\forall\, inouts_v\ inouts_v'\ x.$
$[\![P]\!]_e\ ((|inouts_v = inouts_v|)) \longrightarrow$
$[\![Q]\!]_e\ ((|inouts_v = inouts_v|), (|inouts_v = inouts_v'|)) \longrightarrow$
$length(inouts_v\ x) = m$
proof −
from *s1* **have** *1*:$((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}m\text{»}) \sqsubseteq Dom(PrePost((P \vdash_n Q))))$
by (*simp add*: *SimBlock-def*)
then show *?thesis*
by (*rel-auto*)
qed

lemma *SimBlock-implies-Qn* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* ($P \vdash_n Q$)
shows $\forall\, inouts_v\ inouts_v'\ x.$
$[\![P]\!]_e\ ((|inouts_v = inouts_v|)) \longrightarrow$
$[\![Q]\!]_e\ ((|inouts_v = inouts_v|), (|inouts_v = inouts_v'|)) \longrightarrow$
$length(inouts_v'\ x) = n$
proof −
from *s1* **have** *1*:$((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n\text{»}) \sqsubseteq Ran(PrePost((P \vdash_n Q))))$
by (*simp add*: *SimBlock-def*)
then show *?thesis*
by (*rel-auto*)
qed

lemma *sim-refine-implies-inps-outps-eq*:
assumes *s1*: *SimBlock m1 n1* (P)
assumes *s2*: *SimBlock m2 n2* (Q)
assumes *s3*: $(P) \sqsubseteq (Q)$
assumes *s4*: $(pre_D(P) \wedge post_D(Q)) \neq false$
shows $m1 = m2 \wedge n1 = n2$
proof −

have *ref-des*: $pre_D(Q) \sqsubseteq pre_D(P) \wedge post_D(P) \sqsubseteq (pre_D(P) \wedge post_D(Q))$
using *s3*
by (*simp add*: *design-refine-thms*(*1*) *design-refine-thms*(*2*) *refBy-order*)
have *pred-1*: $PrePost(P) = (pre_D(P) \wedge post_D(P))$
apply (*simp*)
done
have *pred-2*: $PrePost(Q) = (pre_D(Q) \wedge post_D(Q))$
apply (*simp*)
done
have *pred-1-not-false*: $(pre_D(P) \wedge post_D(P)) \neq false$
using *SimBlock-def s1* **by** *force*
have *pred-2-not-false*: $(pre_D(Q) \wedge post_D(Q)) \neq false$
using *SimBlock-def s2* **by** *force*
have *ref-inps-1*: $((\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m1») \sqsubseteq Dom((pre_D(P) \wedge post_D(P))))$
using *s1* **apply** (*simp add*: *SimBlock-def*)
done
then have *ref-inps-12*: $... \sqsubseteq Dom((pre_D(P) \wedge post_D(Q)))$
apply (*simp add*: *ref-des Dom-def*)
by (*smt ref-des arestr.rep-eq conj-upred-def ex.rep-eq inf-bool-def inf-uexpr.rep-eq upred-ref-iff*)
have *ref-inps-2*: $((\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m2») \sqsubseteq Dom((pre_D(Q) \wedge post_D(Q))))$
using *s2* **apply** (*simp add*: *SimBlock-def*)
done
have *ref-p2-p1*: $Dom((pre_D(Q) \wedge post_D(Q))) \sqsubseteq Dom((pre_D(P) \wedge post_D(Q)))$
apply (*simp add*: *Dom-def*)
by (*smt ref-des aext-mono arestr-and order-refl utp-pred-laws.ex-mono utp-pred-laws.inf.absorb-iff2 utp-pred-laws.inf-mono*)
from *ref-p2-p1* **and** *ref-inps-2* **have** *ref-inps-2-p1*: $((\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m2») \sqsubseteq Dom((pre_D(P) \wedge post_D(Q))))$
by *simp*
from *ref-inps-2-p1* **have** *P1-Q2-implies-m2*: $(\forall\, b.\ [\![Dom((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow [\![(\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m2»)]\!]_e\ b)$
apply (*simp add*: *upred-ref-iff*)
done
from *ref-inps-12* **have** *P1-Q2-implies-m1*: $(\forall\, b.\ [\![Dom((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow [\![(\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m1»)]\!]_e\ b)$
apply (*simp add*: *upred-ref-iff*)
done
from *P1-Q2-implies-m1* **and** *P1-Q2-implies-m2* **have** *P1-Q2-implies-m2-m1*:
$\forall\, b.\ [\![Dom((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![(\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m2»)]\!]_e\ b \wedge [\![(\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m1»)]\!]_e\ b)$
by *blast*
then have *P1-Q2-implies-m2-m1-1*: $\forall\, b.\ [\![Dom((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![(\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m2») \wedge (\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m1»)]\!]_e\ b)$
by (*simp add*: *conj-implies2*)
have *forall-comb*: $((\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m2») \wedge (\forall\ na \cdot \#_u(\&inouts(«na»)_a) =_u «m1»)) =$
$(\forall\ na \cdot ((\#_u(\&inouts(«na»)_a) =_u «m2») \wedge (\#_u(\&inouts(«na»)_a) =_u «m1»)))$
apply (*rel-auto*)
done
from *P1-Q2-implies-m2-m1-1* **have** *P1-Q2-implies-m2-m1-2*:
$\forall\, b.\ [\![Dom((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![(\forall\ na \cdot ((\#_u(\&inouts(«na»)_a) =_u «m2») \wedge (\#_u(\&inouts(«na»)_a) =_u «m1»)))]\!]_e\ b)$
by (*simp add*: *forall-comb*)
have *m1-m2-eq*: $m2 = m1$
proof (*rule ccontr*)

assume *ss1*: $m2 \neq m1$
have *conj-false*: $(\forall\ na \cdot ((\#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}m2\text{»}) \wedge (\#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}m1\text{»}))) = false$
using *ss1* **apply** (*rel-auto*)
done
have *imp-false*: $\forall\, b.\ [\![Dom((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![false]\!]_e\ b)$
using *P1-Q2-implies-m2-m1-2*
apply (*simp add*: *conj-false*)
done
have *dom-false*: $Dom((pre_D(P) \wedge post_D(Q))) = false$
by (*metis imp-false true-conj-zero(2) udeduct-refineI utp-pred-laws.inf.orderE utp-pred-laws.inf-commute*)
have *P1-Q2-false*: $(pre_D(P) \wedge post_D(Q)) = false$
by (*metis assume-Dom assume-false dom-false seqr-left-zero*)
show *False*
using *s4* **apply** (*simp add*: *P1-Q2-false*)
done
qed

have *ref-inps-1'*: $((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1\text{»}) \sqsubseteq Ran((pre_D(P) \wedge post_D(P))))$
using *s1* **apply** (*simp add*: *SimBlock-def*)
done
then have *ref-inps-12'*: $... \sqsubseteq Ran((pre_D(P) \wedge post_D(Q)))$
apply (*simp add*: *ref-des Ran-def*)
by (*smt ref-des arestr.rep-eq conj-upred-def ex.rep-eq inf-bool-def inf-uexpr.rep-eq upred-ref-iff*)
have *ref-inps-2'*: $((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»}) \sqsubseteq Ran((pre_D(Q) \wedge post_D(Q))))$
using *s2* **apply** (*simp add*: *SimBlock-def*)
done
have *ref-p2-p1'*: $Ran((pre_D(Q) \wedge post_D(Q))) \sqsubseteq Ran((pre_D(P) \wedge post_D(Q)))$
apply (*simp add*: *Ran-def*)
by (*smt ref-des aext-mono arestr-and order-refl utp-pred-laws.ex-mono utp-pred-laws.inf.absorb-iff2 utp-pred-laws.inf-mono*)
from *ref-p2-p1'* **and** *ref-inps-2'* **have** *ref-inps-2-p1'*: $((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»}) \sqsubseteq Ran((pre_D(P) \wedge post_D(Q))))$
by *simp*
from *ref-inps-2-p1'* **have** *P1-Q2-implies-n2*: $(\forall\, b.\ [\![Ran((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow [\![(\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»})]\!]_e\ b)$
apply (*simp add*: *upred-ref-iff*)
done
from *ref-inps-12'* **have** *P1-Q2-implies-n1*: $(\forall\, b.\ [\![Ran((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow [\![(\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1\text{»})]\!]_e\ b)$
apply (*simp add*: *upred-ref-iff*)
done
from *P1-Q2-implies-n1* **and** *P1-Q2-implies-n2* **have** *P1-Q2-implies-n2-n1*:
$\forall\, b.\ [\![Ran((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![(\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»})]\!]_e\ b \wedge [\![(\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1\text{»})]\!]_e\ b)$
by *blast*
then have *P1-Q2-implies-n2-n1-1*:
$\forall\, b.\ [\![Ran((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![(\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»}) \wedge (\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1\text{»})]\!]_e\ b)$
by (*simp add*: *conj-implies2*)
have *forall-comb'*: $((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»}) \wedge (\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1\text{»})) =$
$(\forall\ na \cdot ((\#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n2\text{»}) \wedge (\#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1\text{»})))$
apply (*rel-auto*)
done

from *P1-Q2-implies-n2-n1-1* **have** *P1-Q2-implies-n2-n1-2*:
$\forall\, b.\ [\![Ran((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![(\forall\ na \cdot ((\#_u(\&inouts(\ll na \gg)_a) =_u \ll n2 \gg) \wedge (\#_u(\&inouts(\ll na \gg)_a) =_u \ll n1 \gg)))]\!]_e\ b)$
by (*simp add*: *forall-comb'*)
have *n1-n2-eq*: *n2* = *n1*
proof (*rule ccontr*)
assume *ss1*: *n2* ≠ *n1*
have *conj-false*: $(\forall\ na \cdot ((\#_u(\&inouts(\ll na \gg)_a) =_u \ll n2 \gg) \wedge (\#_u(\&inouts(\ll na \gg)_a) =_u \ll n1 \gg))) = false$
using *ss1* **apply** (*rel-auto*)
done
have *imp-false*: $\forall\, b.\ [\![Ran((pre_D(P) \wedge post_D(Q)))]\!]_e\ b \longrightarrow ([\![false]\!]_e\ b)$
using *P1-Q2-implies-n2-n1-2*
apply (*simp add*: *conj-false*)
done
have *dom-false*: $Ran((pre_D(P) \wedge post_D(Q))) = false$
by (*metis imp-false true-conj-zero*(2) *udeduct-refineI utp-pred-laws.inf.orderE utp-pred-laws.inf-commute*)
have *P1-Q2-false*: $(pre_D(P) \wedge post_D(Q)) = false$
by (*metis assume-Ran assume-false dom-false seqr-right-zero*)
show *False*
using *s4* **apply** (*simp add*: *P1-Q2-false*)
done
qed
show *?thesis*
apply (*simp add*: *n1-n2-eq m1-m2-eq*)
done
qed

B.4 Operators

B.4.1 Id

lemma *SimBlock-Id* [*simblock-healthy*]:
SimBlock 1 1 (*Id*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*metis f-Const-def length-Cons list.size*(3))
by (*simp add*: *f-blocks*)

lemma *inps-id*: *inps Id* = *1*
using *SimBlock-Id inps-outps* **by** *auto*

lemma *outps-id*: *outps Id* = *1*
using *SimBlock-Id inps-outps* **by** *auto*

B.4.2 Sequential Composition

lemma *refine-seq-mono*:
assumes *P1* ⊑ *P2* **and** *Q1* ⊑ *Q2*
shows *P1* ;; *Q1* ⊑ *P2* ;; *Q2*
by (*simp add*: *assms*(1) *assms*(2) *seqr-mono*)

lemma *FBlock-seq-comp*:

assumes *s1*: *SimBlock m1 n1* (*FBlock* (λ*x n*. *True*) *m1 n1 f*)
assumes *s2*: *SimBlock n1 n2* (*FBlock* (λ*x n*. *True*) *n1 n2 g*)
shows *FBlock* (λ*x n*. *True*) *m1 n1 f* ; ; *FBlock* (λ*x n*. *True*) *n1 n2 g* = *FBlock* (λ*x n*. *True*) *m1 n2* (*g* ∘ *f*)
proof −
show *?thesis*
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
apply (*rule iffI*)
apply (*clarify*)
apply *presburger*
apply (*rel-auto*)
proof −
fix ok_v $inouts_v$ ok_v' $inouts_v'$
assume *a0*: ok_v'
assume *a1*: (∀ *x*. *length*($inouts_v$ *x*) = *m1* ∧ *length*($inouts_v'$ *x*) = *n2* ∧
g (*f* $inouts_v$) *x* = $inouts_v'$ *x*)
show ∃ ok_v'' $inouts_v''$.
(ok_v ⟶ ok_v'' ∧ (∀ *x*. *length*($inouts_v''$ *x*) = *n1* ∧ *f* $inouts_v$ *x* = $inouts_v''$ *x*)
∧ (∀ *x xa*. *length*(*x xa*) = *m1* ⟶ *length*(*f x xa*) = *n1*)) ∧
(ok_v'' ⟶ (∀ *x*. *length*($inouts_v''$ *x*) = *n1* ∧ *g* $inouts_v''$ *x* = $inouts_v'$ *x*)
∧ (∀ *x xa*. *length*(*x xa*) = *n1* ⟶ *length*(*g x xa*) = *n2*))
apply (*rule-tac x* = ok_v' **in** *exI*)
apply (*rule-tac x* = *f* $inouts_v$ **in** *exI*, *simp*)
using *SimBlock-FBlock-fn a0 a1 assms*(*2*) *s1* **by** *blast*
qed
qed

lemma *SimBlock-FBlock-seq-comp* [*simblock-healthy*]:
assumes *s1*: *SimBlock m1 n1* (*FBlock* (λ*x n*. *True*) *m1 n1 f*)
assumes *s2*: *SimBlock n1 n2* (*FBlock* (λ*x n*. *True*) *n1 n2 g*)
shows *SimBlock m1 n2* (*FBlock* (λ*x n*. *True*) *m1 n1 f* ; ; *FBlock* (λ*x n*. *True*) *n1 n2 g*)
apply (*simp add*: *s1 s2 FBlock-seq-comp*)
apply (*rule SimBlock-FBlock*)
proof −
obtain $inouts_v$::*nat* ⇒ *real list* **where** *P*: ∀ *na*. *length*($inouts_v$ *na*) = *m1*
using *list-len-avail* **by** *auto*
show ∃ $inouts_v$ $inouts_v'$. ∀ *x*. *length*($inouts_v'$ *x*) = *n2* ∧ *length*($inouts_v$ *x*) = *m1* ∧
(*g* ∘ *f*) $inouts_v$ *x* = $inouts_v'$ *x*
apply (*rule-tac x* = $inouts_v$ **in** *exI*)
apply (*rule-tac x* = (*g* ∘ *f*) $inouts_v$ **in** *exI*)
using *P SimBlock-FBlock-fn assms*(*2*) *s1* **by** *auto*
next
show ∀ *x na*. *length*(*x na*) = *m1* ⟶ *length*((*g* ∘ *f*) *x na*) = *n2*
using *SimBlock-FBlock-fn assms*(*2*) *s1* **by** *auto*
qed

lemma *FBlock-seq-comp'*:
assumes *s1*: *SimBlock m1 n1* (*FBlock* (*p1*) *m1 n1 f*)
assumes *s2*: *SimBlock n1 n2* (*FBlock* (*p2*) *n1 n2 g*)
shows *FBlock* (λ*x n*. *p1 x n* ∧ *length*(*x n*) = *m1*) *m1 n1 f* ; ;
FBlock (λ*x n*. *p2 x n* ∧ *length*(*x n*) = *n1*) *n1 n2 g*
= *FBlock* (λ*x n*. *p1 x n* ∧ (*p2* ∘ *f*) *x n* ∧ *length*(*x n*) = *m1*) *m1 n2* (*g* ∘ *f*)
proof −
from *s1* **have** *1*: ∀ *x n*. *length*(*x n*) = *m1* ⟶ *length*(*f x n*) = *n1*

```
    using SimBlock-FBlock-fn' by blast
  from s2 have 2: ∀ x n. length(x n) = n1 ⟶ length(g x n) = n2
    using SimBlock-FBlock-fn' by blast
  show ?thesis
    apply (simp add: sim-blocks)
    apply (simp add: ndesign-composition-wp wp-upred-def)
    apply (rule ref-eq)
    apply (rule ndesign-refine-intro)
    apply (rel-simp)
    using 1 apply fastforce
    apply (rel-simp)
    apply (rule-tac x = f inouts_v in exI)
    using 1 2 apply simp
    apply (rule ndesign-refine-intro)
    apply (rel-simp)
    apply (metis ext)
    apply (rel-simp)
    by presburger
qed

lemma SimBlock-FBlock-seq-comp' [simblock-healthy]:
  assumes s1: SimBlock m1 n1 (FBlock (p1) m1 n1 f)
  assumes s2: SimBlock n1 n2 (FBlock (p2) n1 n2 g)

  assumes s3: ∀ x n. (p1 x n) ⟶ (p2 o f) x n
  shows SimBlock m1 n2 (FBlock (λx n. p1 x n ∧ length(x n) = m1) m1 n1 f ; ;
                        FBlock (λx n. p2 x n ∧ length(x n) = n1) n1 n2 g)
  apply (simp add: s1 s2 FBlock-seq-comp')
  apply (rule SimBlock-FBlock')
  proof −
    obtain inouts_v::nat ⇒ real list where P: ∀ na. length(inouts_v na) = m1 ∧ p1 inouts_v na
      using list-len-avail s1 SimBlock-FBlock-p by metis
    show ∃ inouts_v.
      (∀ x. p1 inouts_v x ∧ p2 (f inouts_v) x ∧ length(inouts_v x) = m1) ∧
      (∃ inouts_v'. ∀ x. length(inouts_v' x) = n2 ∧ length(inouts_v x) = m1 ∧ (g ∘ f) inouts_v x = inouts_v'
x)
      apply (rule-tac x = inouts_v in exI)
      apply (rule conjI)
      using P s3 apply auto[1]
      apply (rule-tac x = (g ∘ f) inouts_v in exI)
      using P assms(2) SimBlock-FBlock-fn' s1 by auto
  next
    show ∀ x na. length(x na) = m1 ⟶ length((g ∘ f) x na) = n2
      using SimBlock-FBlock-fn' assms(2) s1 by auto
  qed
```

B.4.3 Parallel Composition

B.4.3.1 *mergeB* *ThreeWayMerge'*: similar to *ThreeWayMerge*, but it merges 1 and 2 firstly and then merges 0. Instead, *ThreeWayMerge* merges 0 and 1 firstly, then merges 2.

```
definition ThreeWayMerge' :: 'α merge ⇒ (('α, 'α, ('α, 'α, 'α) mrg) mrg, 'α) urel (M30'(-')) where
[upred-defs]: ThreeWayMerge' M = (($0−v´ =_u $0−v ∧ $v_<´ =_u $v_<) ∧ ($0−v´ =_u $1−0−v ∧
$1−v´ =_u $1−1−v ∧ $v_<´ =_u $v_<) ; ; M ; ; U1) ; ; M
```

mergeB is associative which means the order of merges applied to 0, 1 and 2 does not matter as

long as 0, 1, and 2 are merged in the same order. In other word, M(M(0,1), 2) = M(0, M(1, 2))

lemma *mergeB-assoc*: *ThreeWayMerge* (*mergeB*) = *ThreeWayMerge′* (*mergeB*)
apply (*simp add*: *ThreeWayMerge-def ThreeWayMerge′-def mergeB-def*)
apply (*rel-auto*)
apply (*rename-tac* $inouts_v 0$ $ok_v 0$ $inouts_v 1$ $ok_v 1$ $inouts_v 2$ $ok_v 2$ $inouts_v 3$ $inouts_v 4$ $inouts_v 5$ $inouts_v 6$ $inouts_v 7$)
apply (*rule-tac x* = ($ok_v 1 \wedge ok_v 2$) **in** *exI*)
apply (*rule-tac x* = λ *na*. ($inouts_v 2$ *na* • $inouts_v 3$ *na*) **in** *exI*)
apply (*simp*)
apply (*rule-tac x* = λ *na*. ($inouts_v 2$ *na* • $inouts_v 3$ *na*) **in** *exI*)
apply (*simp*)
apply (*rename-tac* $inouts_v 0$ $ok_v 0$ $inouts_v 1$ $ok_v 1$ $inouts_v 2$ $ok_v 2$ $inouts_v 3$ $inouts_v 4$ $inouts_v 5$ $inouts_v 6$)
apply (*rule-tac x* = $inouts_v 0$ **in** *exI*)
apply (*rule-tac x* = ($ok_v 0 \wedge ok_v 1$) **in** *exI*)
apply (*rule-tac x* = λ *na*. ($inouts_v 1$ *na* • $inouts_v 2$ *na*) **in** *exI*)
apply (*simp*)
apply (*rule-tac x* = λ *na*. ($inouts_v 1$ *na* • $inouts_v 2$ *na*) **in** *exI*)
apply (*simp*)
done

B.4.3.2 *sim-paralell* **lemma** *SimParallel-form*:
assumes *s1*: *SimBlock m1 n1 B1*
assumes *s2*: *SimBlock m2 n2 B2*
shows(*B1* $\|_B$ *B2*) =
($\exists$ (ok_0, ok_1, $inouts_0$, $inouts_1$) •
(((*takem* (*m1*+*m2*) (*m1*)) ; ; *B1*)⟦«ok_0»,«$inouts_0$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
((*dropm* (*m1*+*m2*) (*m2*)) ; ; *B2*)⟦«ok_1»,«$inouts_1$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
(∀ *n*::*nat* • ($$\mathbf{v}_D$:*inouts´* («*n*»)$_a$ =$_u$ («*append*» («$inouts_0$ *n*»)$_a$ («$inouts_1$ *n*»)$_a$))) ∧
($ok´ =$_u$ («ok_0» ∧ «ok_1»))))
(**is** *?lhs* = *?rhs*)
proof −
have *s3*: *inps B1* = *m1*
using *s1* **by** (*simp add*: *inps-outps*)
have *s4*: *inps B2* = *m2*
using *s2* **by** (*simp add*: *inps-outps*)
show *?thesis*
apply (*simp add*: *sim-parallel-def*)
apply (*simp add*: *s3 s4 mergeB-def*)
apply (*simp add*: *par-by-merge-alt-def*, *rel-auto*)
apply (*rename-tac* ok_v $inouts_v′$ $inouts_v 2$ $inouts_v 3$ $ok_v 3$ $inouts_v 4$ $ok_v 4$ $ok_v 5$ $inouts_v 5$ $inouts_v 6$ $ok_v 6$ $inouts_v 7$)
apply *blast*
by *blast*
qed

lemma *SimBlock-parallel-pre-true* [*simblock-healthy*]:
assumes *s1*: *SimBlock m1 n1* (*true* ⊢$_n$ *Q1*)
assumes *s2*: *SimBlock m2 n2* (*true* ⊢$_n$ *Q2*)
shows *SimBlock* (*m1*+*m2*) (*n1*+*n2*) ((*true* ⊢$_n$ *Q1*) $\|_B$ (*true* ⊢$_n$ *Q2*))
proof −
— 1. Simplify the parallel operation
have *1*: ((*true* ⊢$_n$ *Q1*) $\|_B$ (*true* ⊢$_n$ *Q2*)) =
($\exists$ (ok_0, ok_1, $inouts_0$, $inouts_1$) •
(((*takem* (*m1*+*m2*) (*m1*)) ; ; (*true* ⊢$_n$ *Q1*))⟦«ok_0»,«$inouts_0$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
((*dropm* (*m1*+*m2*) (*m2*)) ; ; (*true* ⊢$_n$ *Q2*))⟦«ok_1»,«$inouts_1$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧

$(\forall\ n{::}nat \cdot (\$\mathbf{v}_D{:}inouts\acute{}\ (\ll n\gg)_a =_u (\ll append\gg\ (\ll inouts_0\ n\gg)_a\ (\ll inouts_1\ n\gg)_a))) \wedge$
$(\$ok\acute{} =_u (\ll ok_0\gg \wedge \ll ok_1\gg))))$

using *SimParallel-form s1 s2* **by** *auto*

— 2. Get some basic facts from assumptions

from *s1* **have** $Q1 \neq false$

by (*simp add*: *SimBlock-def*)

then have *Q1-not-false*: $\exists\, inouts_v\ inouts_v'.\ [\![Q1]\!]_e\ (\lparen\!|inouts_v = inouts_v|\!\rparen, \lparen\!|inouts_v = inouts_v'|\!\rparen)$

by (*rel-simp*)

from *s2* **have** $Q2 \neq false$

by (*simp add*: *SimBlock-def*)

then have *Q2-not-false*: $\exists\, inouts_v\ inouts_v'.\ [\![Q2]\!]_e\ (\lparen\!|inouts_v = inouts_v|\!\rparen, \lparen\!|inouts_v = inouts_v'|\!\rparen)$

by (*rel-simp*)

from *s1* **have** $((\forall\ na \cdot \#_u(\&inouts(\ll na\gg)_a) =_u \ll m1\gg) \sqsubseteq Dom(PrePost((true \vdash_n Q1))))$

by (*simp add*: *SimBlock-def*)

then have *ref-m1*: $\forall\, inouts_v\ inouts_v'\ x.\ [\![Q1]\!]_e\ (\lparen\!|inouts_v = inouts_v|\!\rparen, \lparen\!|inouts_v = inouts_v'|\!\rparen) \longrightarrow length(inouts_v\ x) = m1$

by (*rel-simp*)

from *s2* **have** $((\forall\ na \cdot \#_u(\&inouts(\ll na\gg)_a) =_u \ll m2\gg) \sqsubseteq Dom(PrePost((true \vdash_n Q2))))$

by (*simp add*: *SimBlock-def*)

then have *ref-m2*: $\forall\, inouts_v\ inouts_v'\ x.\ [\![Q2]\!]_e\ (\lparen\!|inouts_v = inouts_v|\!\rparen, \lparen\!|inouts_v = inouts_v'|\!\rparen) \longrightarrow length(inouts_v\ x) = m2$

by (*rel-simp*)

have $((\forall\ na \cdot \#_u(\&inouts(\ll na\gg)_a) =_u \ll n1\gg) \sqsubseteq Ran(PrePost((true \vdash_n Q1))))$

using *SimBlock-def s1* **by** *auto*

then have *ref-n1*: $\forall\, inouts_v\ inouts_v'\ x.\ [\![Q1]\!]_e\ (\lparen\!|inouts_v = inouts_v'|\!\rparen, \lparen\!|inouts_v = inouts_v|\!\rparen) \longrightarrow length(inouts_v\ x) = n1$

by (*rel-simp*)

have $((\forall\ na \cdot \#_u(\&inouts(\ll na\gg)_a) =_u \ll n2\gg) \sqsubseteq Ran(PrePost((true \vdash_n Q2))))$

using *SimBlock-def s2* **by** *auto*

then have *ref-n2*: $\forall\, inouts_v\ inouts_v'\ x.\ [\![Q2]\!]_e\ (\lparen\!|inouts_v = inouts_v'|\!\rparen, \lparen\!|inouts_v = inouts_v|\!\rparen) \longrightarrow length(inouts_v\ x) = n2$

by (*rel-simp*)

— Subgoal 1 for *SimBlock-def*

have *c1*: $PrePost((true \vdash_n Q1) \parallel_B (true \vdash_n Q2)) \neq false$

apply (*simp add*: *1*)

apply (*simp add*: *sim-blocks*)

apply (*rel-auto*)

proof −

obtain $inouts_v1$ **and** $inouts_v'1$ **and** $inouts_v2$ **and** $inouts_v'2$

where *P1*: $[\![Q1]\!]_e\ (\lparen\!|inouts_v = inouts_v1|\!\rparen, \lparen\!|inouts_v = inouts_v'1|\!\rparen)$

and *P2*: $[\![Q2]\!]_e\ (\lparen\!|inouts_v = inouts_v2|\!\rparen, \lparen\!|inouts_v = inouts_v'2|\!\rparen)$

using *Q1-not-false Q2-not-false* **by** *blast*

show $\exists\, inouts_v\ inouts_v'.$

$(\forall\, a\ aa\ ab.$

$(\exists\, ok_v.\ ok_v \wedge$

$(\exists\, inouts_v'.$

$(\forall x.\ (m1 = 0 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v'\ x = []) \wedge$

$(0 < m1 \longrightarrow$

$length(inouts_v\ x) = m1 + m2 \wedge$

$length(inouts_v'\ x) = m1 \wedge take\ m1\ (inouts_v\ x) = inouts_v'\ x)) \wedge$

$(ok_v \longrightarrow a \wedge [\![Q1]\!]_e\ (\lparen\!|inouts_v = inouts_v'|\!\rparen, \lparen\!|inouts_v = ab|\!\rparen)))) \longrightarrow$

$(\forall\, b.\ (\exists\, ok_v.\ ok_v \wedge$

$(\exists\, inouts_v'.$

$(\forall x.\ (m2 = 0 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v'\ x = []) \wedge$

$(0 < m2 \longrightarrow$

$length(inouts_v\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = m2 \wedge drop\ m1\ (inouts_v\ x) = inouts_v'\ x)) \wedge$
$(ok_v \longrightarrow aa \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = b|\!)))))) \longrightarrow$
$(\exists x.\ \neg\ inouts_v'\ x = ab\ x \bullet b\ x) \vee a \wedge aa)) \wedge$
$(\exists a\ aa.\ (\exists ok_v.\ ok_v \wedge$
$(\exists inouts_v'.$
$(\forall x.\ (m1 = 0 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v'\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = m1 \wedge take\ m1\ (inouts_v\ x) = inouts_v'\ x)) \wedge$
$(ok_v \longrightarrow [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = aa|\!)))))) \wedge$
$(\exists b.\ (\exists ok_v.\ ok_v \wedge$
$(\exists inouts_v'.$
$(\forall x.\ (m2 = 0 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v'\ x = []) \wedge$
$(0 < m2 \longrightarrow$
$length(inouts_v\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = m2 \wedge drop\ m1\ (inouts_v\ x) = inouts_v'\ x)) \wedge$
$(ok_v \longrightarrow a \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = b|\!)))))) \wedge$
$(\forall x.\ inouts_v'\ x = aa\ x \bullet b\ x) \wedge a))$

apply (*rule-tac* $x = \lambda na.\ inouts_v 1\ na \bullet inouts_v 2\ na$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ inouts_v'1\ na \bullet inouts_v'2\ na$ **in** *exI*)
apply (*rule conjI*)
apply *blast*
apply (*rule-tac* $x = True$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ inouts_v'1\ na$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = True$ **in** *exI*)
apply (*simp*)
apply (*rule-tac* $x = \lambda na.\ inouts_v 1\ na$ **in** *exI*)
using *P1 P2 ref-m1 ref-m2* **apply** *fastforce*
apply (*rule-tac* $x = \lambda na.\ inouts_v'2\ na$ **in** *exI*)
apply (*simp*)
apply (*rule-tac* $x = True$ **in** *exI*)
apply (*simp*)
apply (*rule-tac* $x = \lambda na.\ inouts_v 2\ na$ **in** *exI*)
using *P1 P2 ref-m1 ref-m2* **by** *force*

qed

— Subgoal 2 for *SimBlock-def*

have *c2*: $((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}m1{+}m2\text{»}) \sqsubseteq Dom(PrePost((true \vdash_n Q1) \parallel_B (true \vdash_n Q2))))$

apply (*simp add*: *1*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
using *assms*
by (*metis add.right-neutral not-gr-zero*)

— Subgoal 3 for *SimBlock-def*

have *c3*: $((\forall\ na \cdot \#_u(\&inouts(\text{«}na\text{»})_a) =_u \text{«}n1{+}n2\text{»}) \sqsubseteq Ran(PrePost((true \vdash_n Q1) \parallel_B (true \vdash_n Q2))))$

apply (*simp add*: *1*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
by (*simp add*: *ref-n1 ref-n2*)

from *c1 c2 c3* **show** *?thesis*
apply (*simp add*: *SimBlock-def*)

done
qed

Parallel composition of two SimBlocks (provided that the preconditions of both are condition) are still SimBlock.

lemma *SimBlock-parallel* [*simblock-healthy*]:
assumes *s1*: *SimBlock m1 n1* (*P1* $\vdash_n$ *Q1*)
assumes *s2*: *SimBlock m2 n2* (*P2* $\vdash_n$ *Q2*)
shows *SimBlock* (*m1*+*m2*) (*n1*+*n2*) ((*P1* $\vdash_n$ *Q1*) $\|_B$ (*P2* $\vdash_n$ *Q2*))
proof −
have *pform*: ((*P1* $\vdash_n$ *Q1*) $\|_B$ (*P2* $\vdash_n$ *Q2*)) =
(∃ (ok_0, ok_1, $inouts_0$, $inouts_1$) ·
(((*takem* (*m1*+*m2*) (*m1*)) ; ; (*P1* $\vdash_n$ *Q1*))⟦«ok_0»,«$inouts_0$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
((*dropm* (*m1*+*m2*) (*m2*)) ; ; (*P2* $\vdash_n$ *Q2*))⟦«ok_1»,«$inouts_1$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
(∀ *n*::*nat* · ($$\mathbf{v}_D$:*inouts´* («*n*»)$_a$ =$_u$ («*append*» («$inouts_0$ *n*»)$_a$ («$inouts_1$ *n*»)$_a$))) ∧
($ok´ =$_u$ («ok_0» ∧ «ok_1»))))
using *SimParallel-form s1 s2* **by** *auto*
— Subgoal 1 for *SimBlock-def*
have *c1*: *PrePost*((*P1* $\vdash_n$ *Q1*) $\|_B$ (*P2* $\vdash_n$ *Q2*)) ≠ *false*
apply (*simp add*: *pform*)
apply (*simp add*: *sim-blocks*)
apply (*rel-auto*)
proof −
obtain $inouts_v1$::*nat* ⇒ *real list* **and** $inouts_v'1$::*nat* ⇒ *real list* **and**
$inouts_v2$::*nat* ⇒ *real list* **and** $inouts_v'2$::*nat* ⇒ *real list* **where**
P1: ⟦*P1*⟧$_e$ (⦇$inouts_v$ = $inouts_v1$⦈) **and**
Q1: ⟦*Q1*⟧$_e$ (⦇$inouts_v$ = $inouts_v1$⦈, ⦇$inouts_v$ = $inouts_v'1$⦈) **and**
P2: ⟦*P2*⟧$_e$ (⦇$inouts_v$ = $inouts_v2$⦈) **and**
Q2: ⟦*Q2*⟧$_e$ (⦇$inouts_v$ = $inouts_v2$⦈, ⦇$inouts_v$ = $inouts_v'2$⦈)
using *s1 s2 SimBlock-implies-not-PQ′*
by *blast*
have *inps1*: *length*($inouts_v1$ *na*) = *m1*
using *P1 Q1 SimBlock-implies-mP s1* **by** *blast*
have *inps2*: *length*($inouts_v2$ *na*) = *m2*
using *P2 Q2 SimBlock-implies-mP s2* **by** *blast*
have *outps1*: *length*($inouts_v'1$ *na*) = *n1*
using *P1 Q1 SimBlock-implies-Qn s1* **by** *blast*
have *outps2*: *length*($inouts_v'2$ *na*) = *n2*
using *P2 Q2 SimBlock-implies-Qn s2* **by** *blast*
show ∃ $inouts_v$ $inouts_v'$.
(∀ *a aa ab*.
(∃ ok_v. ok_v ∧
(∃ $inouts_v'$.
(∀ *x*. (*m1* = *0* ⟶ *length*($inouts_v$ *x*) = *m2* ∧ $inouts_v'$ *x* = []) ∧
(*0* < *m1* ⟶
length($inouts_v$ *x*) = *m1* + *m2* ∧
length($inouts_v'$ *x*) = *m1* ∧ *take m1* ($inouts_v$ *x*) = $inouts_v'$ *x*)) ∧
(ok_v ∧ ⟦*P1*⟧$_e$ (⦇$inouts_v$ = $inouts_v'$⦈) ⟶
a ∧ ⟦*Q1*⟧$_e$ (⦇$inouts_v$ = $inouts_v'$⦈, ⦇$inouts_v$ = *ab*⦈))))) ⟶
(∀ *b*. (∃ ok_v. ok_v ∧
(∃ $inouts_v'$.
(∀ *x*. (*m2* = *0* ⟶ *length*($inouts_v$ *x*) = *m1* ∧ $inouts_v'$ *x* = []) ∧
(*0* < *m2* ⟶
length($inouts_v$ *x*) = *m1* + *m2* ∧
length($inouts_v'$ *x*) = *m2* ∧ *drop m1* ($inouts_v$ *x*) = $inouts_v'$ *x*)) ∧

$$
\begin{array}{l}
\qquad\qquad\qquad (ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v'|\!) \longrightarrow \\
\qquad\qquad\qquad\ aa \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = b|\!))))) \longrightarrow \\
\qquad\qquad (\exists\, x.\ \neg\ inouts_v'\ x = ab\ x \bullet b\ x) \vee a \wedge aa)) \wedge \\
(\exists\, a\ aa.\ (\exists\, ok_v.\ ok_v \wedge \\
\qquad\qquad\quad (\exists\, inouts_v'. \\
\qquad\qquad\qquad (\forall\, x.\ (m1 = 0 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v'\ x = []) \wedge \\
\qquad\qquad\qquad\quad (0 < m1 \longrightarrow \\
\qquad\qquad\qquad\qquad length(inouts_v\ x) = m1 + m2 \wedge \\
\qquad\qquad\qquad\qquad length(inouts_v'\ x) = m1 \wedge take\ m1\ (inouts_v\ x) = inouts_v'\ x)) \wedge \\
\qquad\qquad\qquad (ok_v \wedge [\![P1]\!]_e\ (\!|inouts_v = inouts_v'|\!) \longrightarrow \\
\qquad\qquad\qquad [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = aa|\!))))) \wedge \\
\qquad\qquad (\exists\, b.\ (\exists\, ok_v.\ ok_v \wedge \\
\qquad\qquad\qquad (\exists\, inouts_v'. \\
\qquad\qquad\qquad\quad (\forall\, x.\ (m2 = 0 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v'\ x = []) \wedge \\
\qquad\qquad\qquad\qquad (0 < m2 \longrightarrow \\
\qquad\qquad\qquad\qquad\ length(inouts_v\ x) = m1 + m2 \wedge \\
\qquad\qquad\qquad\qquad\ length(inouts_v'\ x) = m2 \wedge drop\ m1\ (inouts_v\ x) = inouts_v'\ x)) \wedge \\
\qquad\qquad\qquad\quad (ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v'|\!) \longrightarrow \\
\qquad\qquad\qquad\qquad a \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = b|\!))))) \wedge \\
\qquad\qquad\quad (\forall\, x.\ inouts_v'\ x = aa\ x \bullet b\ x) \wedge a)) \\
\textbf{apply}\ (rule\text{-}tac\ x = \lambda na\ .\ (inouts_v 1\ na \bullet inouts_v 2\ na)\ \textbf{in}\ exI) \\
\textbf{apply}\ (rule\text{-}tac\ x = \lambda na\ .\ (inouts_v'1\ na \bullet inouts_v'2\ na)\ \textbf{in}\ exI) \\
\textbf{apply}\ (rule\ conjI) \\
\textbf{apply}\ (rule\ allI)+ \\
\textbf{apply}\ (simp) \\
\textbf{apply}\ (rule\ impI) \\
\textbf{apply}\ (rule\ allI)+ \\
\textbf{apply}\ (rule\ impI) \\
\quad \textbf{proof} - \\
\qquad \textbf{fix}\ ok_v 1\ \textbf{and}\ ok_v 2\ \textbf{and}\ inouts_v 1'{::}nat \Rightarrow real\ list\ \textbf{and}\ inouts_v 2'{::}nat \Rightarrow real\ list \\
\qquad \textbf{assume}\ a1{:}\ \exists\, ok_v.\ ok_v \wedge \\
\qquad\quad (\exists\, inouts_v'. \\
\qquad\qquad (\forall\, x.\ (m1 = 0 \longrightarrow length(inouts_v 1\ x) + length(inouts_v 2\ x) = m2 \wedge inouts_v'\ x = []) \wedge \\
\qquad\qquad\quad (0 < m1 \longrightarrow \\
\qquad\qquad\qquad length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge \\
\qquad\qquad\qquad length(inouts_v'\ x) = m1 \wedge \\
\qquad\qquad\qquad take\ m1\ (inouts_v 1\ x) \bullet take\ (m1 - length(inouts_v 1\ x))\ (inouts_v 2\ x) = \\
\qquad\qquad\qquad inouts_v'\ x)) \wedge \\
\qquad\qquad (ok_v \wedge [\![P1]\!]_e\ (\!|inouts_v = inouts_v'|\!)) \longrightarrow \\
\qquad\qquad\ ok_v 1 \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = inouts_v 1'|\!)))) \\
\qquad \textbf{assume}\ a2{:}\ \exists\, ok_v.\ ok_v \wedge \\
\qquad\quad (\exists\, inouts_v'. \\
\qquad\qquad (\forall\, x.\ (m2 = 0 \longrightarrow length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 \wedge inouts_v'\ x = []) \wedge \\
\qquad\qquad\quad (0 < m2 \longrightarrow \\
\qquad\qquad\qquad length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge \\
\qquad\qquad\qquad length(inouts_v'\ x) = m2 \wedge \\
\qquad\qquad\qquad drop\ m1\ (inouts_v 1\ x) \bullet drop\ (m1 - length(inouts_v 1\ x))\ (inouts_v 2\ x) = \\
\qquad\qquad\qquad inouts_v'\ x)) \wedge \\
\qquad\qquad (ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v'|\!)) \longrightarrow \\
\qquad\qquad\ ok_v 2 \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v'|\!), (\!|inouts_v = inouts_v 2'|\!)))) \\
\qquad \textbf{from}\ a1\ \textbf{have}\ 1{:}\ \exists\, ok_v.\ ok_v \wedge \\
\qquad\quad (\exists\, inouts_v'. \\
\qquad\qquad (\forall\, x.\ (m1 = 0 \longrightarrow \\
\qquad\qquad\qquad length(inouts_v 1\ x) + length(inouts_v 2\ x) = m2 \wedge \\
\qquad\qquad\qquad inouts_v 1\ x = [] \wedge
\end{array}
$$

$inouts_v\,'\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v\,'\ x) = m1 \wedge$
$inouts_v 1\ x = inouts_v\,'\ x)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v\,'|\!)) \longrightarrow$
$ok_v 1 \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v\,'|\!), (\!|inouts_v = inouts_v 1\,'|\!))))$

using *inps1 P1 Q1 SimBlock-implies-mP s1*

by (*smt append-take-drop-id cancel-comm-monoid-add-class.diff-cancel length-0-conv length-drop take-eq-Nil*)

then have *2*: $\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v\,'.$
$(\forall\, x.\ inouts_v 1\ x = inouts_v\,'\ x \wedge$
$(m1 = 0 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m2 \wedge$
$inouts_v 1\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v 1\ x) = m1)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v\,'|\!)) \longrightarrow$
$ok_v 1 \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v\,'|\!), (\!|inouts_v = inouts_v 1\,'|\!))))$

by (*metis* (*full-types*) *inps1 length-0-conv length-greater-0-conv*)

then have *3*: $\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v\,'.$
$(\forall\, x.\ inouts_v 1\ x = inouts_v\,'\ x) \wedge$
$(\forall\, x.\ (m1 = 0 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m2 \wedge$
$inouts_v 1\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v 1\ x) = m1)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v\,'|\!)) \longrightarrow$
$ok_v 1 \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v\,'|\!), (\!|inouts_v = inouts_v 1\,'|\!))))$

by *smt*

then have *4*: $\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v\,'.$
$(\forall\, x.\ (m1 = 0 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m2 \wedge$
$inouts_v 1\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v 1\ x) = m1)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!)) \longrightarrow$
$ok_v 1 \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!), (\!|inouts_v = inouts_v 1\,'|\!))))$

by (*metis 2 3 append-Nil ext length-append less-not-refl neq0-conv*)

then have *5*: $\exists\, ok_v.\ ok_v \wedge$
$(\forall\, x.\ (m1 = 0 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m2 \wedge$
$inouts_v 1\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v 1\ x) = m1)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!)) \longrightarrow$
$ok_v 1 \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!), (\!|inouts_v = inouts_v 1\,'|\!)))$

by (*simp*)

then have *6*:
(∀ *x*. (*m1* = *0* ⟶
length(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m2* ∧
inouts$_v$ *1 x* = []) ∧
(*0* < *m1* ⟶
length(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* + *m2* ∧
length(*inouts*$_v$ *1 x*) = *m1*)) ∧
(⟦*P1*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$ *1*⦈) ⟶
ok$_v$ *1* ∧ ⟦*Q1*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$ *1*⦈, ⦇*inouts*$_v$ = *inouts*$_v$ *1′*⦈)))
by *blast*
then have *7*: (⟦*P1*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$ *1*⦈) ⟶
ok$_v$ *1* ∧ ⟦*Q1*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$ *1*⦈, ⦇*inouts*$_v$ = *inouts*$_v$ *1′*⦈)))
by *simp*
from *a2* **have** *11*: ∃ *ok*$_v$. *ok*$_v$ ∧
(∃ *inouts*$_v$*′*.
(∀ *x*. (*m2* = *0* ⟶ *length*(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* ∧
inouts$_v$*′ x* = [] ∧ *inouts*$_v$ *2 x* = []) ∧
(*0* < *m2* ⟶
length(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* + *m2* ∧
length(*inouts*$_v$*′ x*) = *m2* ∧
(*inouts*$_v$ *2 x*) = *inouts*$_v$*′ x*)) ∧
(*ok*$_v$ ∧ ⟦*P2*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$*′*⦈) ⟶
ok$_v$ *2* ∧ ⟦*Q2*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$*′*⦈, ⦇*inouts*$_v$ = *inouts*$_v$ *2′*⦈))))
using *inps1 P2 Q2 SimBlock-implies-mP s2*
by (*smt P1 Q1 append-self-conv2 cancel-comm-monoid-add-class.diff-cancel drop-0 drop-eq-Nil order-refl s1*)
then have *12*: ∃ *ok*$_v$. *ok*$_v$ ∧
(∃ *inouts*$_v$*′*.
(∀ *x*. *inouts*$_v$ *2 x* = *inouts*$_v$*′ x* ∧
(*m2* = *0* ⟶ *length*(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* ∧
inouts$_v$ *2 x* = []) ∧
(*0* < *m2* ⟶
length(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* + *m2* ∧
length(*inouts*$_v$ *2 x*) = *m2*)) ∧
(*ok*$_v$ ∧ ⟦*P2*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$*′*⦈) ⟶
ok$_v$ *2* ∧ ⟦*Q2*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$*′*⦈, ⦇*inouts*$_v$ = *inouts*$_v$ *2′*⦈))))
by (*metis* (*full-types*) *inps2 length-0-conv length-greater-0-conv*)
then have *13*: ∃ *ok*$_v$. *ok*$_v$ ∧
(∃ *inouts*$_v$*′*.
(∀ *x*. *inouts*$_v$ *2 x* = *inouts*$_v$*′ x*) ∧
(∀ *x*. (*m2* = *0* ⟶ *length*(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* ∧
inouts$_v$ *2 x* = []) ∧
(*0* < *m2* ⟶
length(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* + *m2* ∧
length(*inouts*$_v$ *2 x*) = *m2*)) ∧
(*ok*$_v$ ∧ ⟦*P2*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$*′*⦈) ⟶
ok$_v$ *2* ∧ ⟦*Q2*⟧$_e$ (⦇*inouts*$_v$ = *inouts*$_v$*′*⦈, ⦇*inouts*$_v$ = *inouts*$_v$ *2′*⦈))))
by *smt*
then have *14*: ∃ *ok*$_v$. *ok*$_v$ ∧
(∃ *inouts*$_v$*′*.
(∀ *x*. (*m2* = *0* ⟶ *length*(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* ∧
inouts$_v$ *2 x* = []) ∧
(*0* < *m2* ⟶
length(*inouts*$_v$ *1 x*) + *length*(*inouts*$_v$ *2 x*) = *m1* + *m2* ∧
length(*inouts*$_v$ *2 x*) = *m2*)) ∧

$(ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!)) \longrightarrow$
$ok_v 2 \wedge [\![Q2]\!]_e\ (\!|inouts_v = inouts_v 2|\!), (\!|inouts_v = inouts_v 2'|\!))))$
by (*metis 12 13 append-Nil ext length-append less-not-refl neq0-conv*)
then have *15*: $\exists\, ok_v.\ ok_v \wedge$
$(\forall\, x.\ (m2 = 0 \longrightarrow length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 \wedge$
$inouts_v 2\ x = []) \wedge$
$(0 < m2 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v 2\ x) = m2)) \wedge$
$(ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!)) \longrightarrow$
$ok_v 2 \wedge [\![Q2]\!]_e\ (\!|inouts_v = inouts_v 2|\!), (\!|inouts_v = inouts_v 2'|\!)))$
by (*simp*)
then have *16*:
$(\forall\, x.\ (m2 = 0 \longrightarrow length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 \wedge$
$inouts_v 2\ x = []) \wedge$
$(0 < m2 \longrightarrow$
$length(inouts_v 1\ x) + length(inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v 2\ x) = m2)) \wedge$
$([\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!)) \longrightarrow$
$ok_v 2 \wedge [\![Q2]\!]_e\ (\!|inouts_v = inouts_v 2|\!), (\!|inouts_v = inouts_v 2'|\!)))$
by *blast*
then have *17*: $([\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!)) \longrightarrow$
$ok_v 2 \wedge [\![Q2]\!]_e\ (\!|inouts_v = inouts_v 2|\!), (\!|inouts_v = inouts_v 2'|\!)))$
by *simp*
show $(\exists\, x.\ \neg\ inouts_v'1\ x \bullet inouts_v'2\ x = inouts_v 1'\ x \bullet inouts_v 2'\ x) \vee ok_v 1 \wedge ok_v 2$
proof (*rule ccontr*)
assume *aa*: $\neg\ ((\exists\, x.\ \neg\ inouts_v'1\ x \bullet inouts_v'2\ x = inouts_v 1'\ x \bullet inouts_v 2'\ x) \vee ok_v 1 \wedge ok_v 2)$
from *aa* **have** *b1*: $(\forall\, x.\ inouts_v'1\ x \bullet inouts_v'2\ x = inouts_v 1'\ x \bullet inouts_v 2'\ x) \wedge (\neg\ ok_v 1 \vee \neg\ ok_v 2)$
by (*simp*)
from *b1* **have** *b2*: $(\forall\, x.\ inouts_v'1\ x \bullet inouts_v'2\ x = inouts_v 1'\ x \bullet inouts_v 2'\ x)$
by (*simp*)
from *b1* **have** *b3*: $(\neg\ ok_v 1 \vee \neg\ ok_v 2)$
by (*simp*)
from *b3 7 17* **have** *b4*:
$\neg\ [\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!)) \vee$
$\neg\ [\![P1]\!]_e\ (\!|inouts_v = inouts_v 1|\!))$
by *blast*
from *s1* **have** *b5*: $[\![P1]\!]_e\ (\!|inouts_v = inouts_v 1|\!))$
using *P1 SimBlock-implies-not-P-cond*
by *blast*
from *s2* **have** *b6*: $[\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!))$
using *P2 SimBlock-implies-not-P-cond* **by** *blast*
show *False*
using *b4 b5 b6* **by** (*auto*)
qed
next
show $\exists\, a\ aa.\ (\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v'.$
$(\forall\, x.\ (m1 = 0 \longrightarrow length(inouts_v 1\ x \bullet inouts_v 2\ x) = m2 \wedge inouts_v'\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v 1\ x \bullet inouts_v 2\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = m1 \wedge take\ m1\ (inouts_v 1\ x \bullet inouts_v 2\ x) = inouts_v'\ x)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ (\!|inouts_v = inouts_v'|\!)) \longrightarrow$

$[\![Q1]\!]_e$ ($(\!|inouts_v = inouts_v'|\!)$, $(\!|inouts_v = aa|\!)$))))) $\wedge$
(∃ b. (∃ ok_v. $ok_v \wedge$
(∃ $inouts_v'$.
(∀ x. ($m2 = 0 \longrightarrow length(inouts_v1\ x \bullet inouts_v2\ x) = m1 \wedge inouts_v'\ x = []$) $\wedge$
($0 < m2 \longrightarrow$
$length(inouts_v1\ x \bullet inouts_v2\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = m2 \wedge drop\ m1\ (inouts_v1\ x \bullet inouts_v2\ x) = inouts_v'\ x$)) $\wedge$
($ok_v \wedge [\![P2]\!]_e$ ($(\!|inouts_v = inouts_v'|\!)$) $\longrightarrow$
$a \wedge [\![Q2]\!]_e$ ($(\!|inouts_v = inouts_v'|\!)$, $(\!|inouts_v = b|\!)$))))) $\wedge$
(∀ x. $inouts_v'1\ x \bullet inouts_v'2\ x = aa\ x \bullet b\ x$) $\wedge$ a)
apply (*rule-tac* $x = True$ **in** *exI*)
apply (*rule-tac* $x = inouts_v'1$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = True$ **in** *exI*, *simp*)
apply (*rule-tac* $x = inouts_v1$ **in** *exI*)
using *P1 P2 Q1 Q2 SimBlock-implies-mP s1 s2*
apply (*smt add-eq-self-zero append.right-neutral*
cancel-ab-semigroup-add-class.add-diff-cancel-left' order-refl sum-eq-sum-conv
take-all take-eq-Nil)
apply (*rule-tac* $x = inouts_v'2$ **in** *exI*, *simp*)
apply (*rule-tac* $x = True$ **in** *exI*, *simp*)
apply (*rule-tac* $x = inouts_v2$ **in** *exI*)
using *P1 P2 Q1 Q2 SimBlock-implies-mP s1 s2*
by (*smt add-eq-self-zero append-eq-append-conv-if*
cancel-ab-semigroup-add-class.add-diff-cancel-left' drop-0 list-exhaust-size-eq0
sum-eq-sum-conv)
qed
qed
— Subgoal 2 for *SimBlock-def*
have *c2*: ((∀ $na \cdot \#_u(\&inouts(\langle\langle na \rangle\rangle)_a) =_u \langle\langle m1+m2 \rangle\rangle$) $\sqsubseteq$ $Dom(PrePost((P1 \vdash_n Q1) \parallel_B (P2 \vdash_n Q2))))$
apply (*simp add*: *pform*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
using *assms*
by (*metis add.right-neutral not-gr-zero*)
— Subgoal 3 for *SimBlock-def*
have *c3*: ((∀ $na \cdot \#_u(\&inouts(\langle\langle na \rangle\rangle)_a) =_u \langle\langle n1+n2 \rangle\rangle$) $\sqsubseteq$ $Ran(PrePost((P1 \vdash_n Q1) \parallel_B (P2 \vdash_n Q2))))$
apply (*simp add*: *pform*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
apply (*rename-tac* $inouts_v'$ $inouts_v$ n $ok_v q1$ $ok_v q2$ $inouts_v1'$ ok_v $inouts_v2'$ $inouts_v1$ ok_v' $inouts_v2$)
proof −
fix $inouts_v'$ $inouts_v$ n $ok_v q1$ $ok_v q2$ $inouts_v1'$ ok_v $inouts_v2'$ $inouts_v1$ ok_v' $inouts_v2$
assume *a1*: $[\![P1]\!]_e$ ($(\!|inouts_v = inouts_v1|\!)$) $\longrightarrow$ $[\![Q1]\!]_e$ ($(\!|inouts_v = inouts_v1|\!)$, $(\!|inouts_v = inouts_v1'|\!)$)
assume *a2*: $[\![P2]\!]_e$ $(\!|inouts_v = inouts_v2|\!)$ $\longrightarrow$ $[\![Q2]\!]_e$ ($(\!|inouts_v = inouts_v2|\!)$, $(\!|inouts_v = inouts_v2'|\!)$)
assume *a3*: ∀ a aa ab.
(∃ ok_v. $ok_v \wedge$
(∃ $inouts_v$.
(∀ x. ($m1 = 0 \longrightarrow inouts_v\ x = []$) $\wedge$
($0 < m1 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v1\ x = inouts_v\ x$)) $\wedge$
($ok_v \wedge [\![P1]\!]_e$ ($(\!|inouts_v = inouts_v|\!)$ $\longrightarrow$
$a \wedge [\![Q1]\!]_e$ ($(\!|inouts_v = inouts_v|\!)$, $(\!|inouts_v = ab|\!)$))))) $\longrightarrow$

$(\forall\, b.\ (\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v.$
$(\forall\, x.\ (m2 = 0 \longrightarrow inouts_v\ x = []) \wedge$
$(0 < m2 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v 2\ x = inouts_v\ x)) \wedge$
$(ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v|\!) \longrightarrow$
$aa \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = b|\!))))) \longrightarrow$
$(\exists\, x.\ \neg\ inouts_v 1'\ x \bullet inouts_v 2'\ x = ab\ x \bullet b\ x) \vee a \wedge aa)$
assume *a4*: $\forall\, x.\ inouts_v'\ x = inouts_v 1'\ x \bullet inouts_v 2'\ x$
assume *a5*: $\forall\, x.\ (m1 = 0 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v 1\ x = []) \wedge$
$(0 < m1 \longrightarrow length(inouts_v\ x) = m1 + m2 \wedge length(inouts_v 1\ x) = m1 \wedge$
$take\ m1\ (inouts_v\ x) = inouts_v 1\ x)$
assume *a6*: $\forall\, x.\ (m2 = 0 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v 2\ x = []) \wedge$
$(0 < m2 \longrightarrow length(inouts_v\ x) = m1 + m2 \wedge length(inouts_v 2\ x) = m2 \wedge$
$drop\ m1\ (inouts_v\ x) = inouts_v 2\ x)$
from *a5* **have** *1*: $length(inouts_v 1\ na) = m1$
by *blast*
from *a6* **have** *2*: $length(inouts_v 2\ na) = m2$
by *blast*
from *a3* **have** $(\forall\, a\ aa\ ab.$
$(\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v.$
$(\forall\, x.\ (m1 = 0 \longrightarrow inouts_v\ x = []) \wedge$
$(0 < m1 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v 1\ x = inouts_v\ x)) \wedge$
$(ok_v \wedge [\![P1]\!]_e\ (\!|inouts_v = inouts_v|\!) \longrightarrow$
$a \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = ab|\!))))) \longrightarrow$
$(\forall\, b.\ (\exists\, ok_v.\ ok_v \wedge$
$(\exists\, inouts_v.$
$(\forall\, x.\ (m2 = 0 \longrightarrow inouts_v\ x = []) \wedge$
$(0 < m2 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v 2\ x = inouts_v\ x)) \wedge$
$(ok_v \wedge [\![P2]\!]_e\ (\!|inouts_v = inouts_v|\!) \longrightarrow$
$aa \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = b|\!))))) \longrightarrow$
$(\exists\, x.\ \neg\ inouts_v 1'\ x \bullet inouts_v 2'\ x = ab\ x \bullet b\ x) \vee a \wedge aa))$
$\longrightarrow (\forall\, a\ aa\ ab.$
$([\![P1]\!]_e\ (\!|inouts_v = inouts_v 1|\!) \longrightarrow$
$a \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!), (\!|inouts_v = ab|\!))) \longrightarrow$
$(\forall\, b.\ ([\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!) \longrightarrow$
$aa \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v 2|\!), (\!|inouts_v = b|\!))) \longrightarrow$
$(\exists\, x.\ \neg\ inouts_v 1'\ x \bullet inouts_v 2'\ x = ab\ x \bullet b\ x) \vee a \wedge aa))$
apply $(simp)$
apply $(rule\ allI)+$
apply $(rename\text{-}tac\ ok_v q\ inouts_v 1' q\ inouts_v 2' q)$
apply $(rule\ impI)$
apply $(rule\ allI)$
apply $(rule\ impI)$
by $(smt\ a5\ a6\ neq0\text{-}conv)$
then have *a3'*: $(\forall\, a\ aa\ ab.$
$([\![P1]\!]_e\ (\!|inouts_v = inouts_v 1|\!) \longrightarrow$
$a \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!), (\!|inouts_v = ab|\!))) \longrightarrow$
$(\forall\, b.\ ([\![P2]\!]_e\ (\!|inouts_v = inouts_v 2|\!) \longrightarrow$
$aa \wedge [\![Q2]\!]_e\ ((\!|inouts_v = inouts_v 2|\!), (\!|inouts_v = b|\!))) \longrightarrow$
$(\exists\, x.\ \neg\ inouts_v 1'\ x \bullet inouts_v 2'\ x = ab\ x \bullet b\ x) \vee a \wedge aa))$
using *a3* **by** *smt*
have *P1*: $[\![P1]\!]_e\ (\!|inouts_v = inouts_v 1|\!)$
using *a3'* **using** *a2* **by** *blast*
then have *Q1*: $[\![Q1]\!]_e\ ((\!|inouts_v = inouts_v 1|\!), (\!|inouts_v = inouts_v 1'|\!))$

```
    using a1 by auto
  then have N1: length(inouts_v 1' n) = n1
    using P1 SimBlock-implies-Qn s1 by blast
  have P2: [[P2]]_e (|inouts_v = inouts_v 2|)
    using a3' using a1 by blast
  then have Q2: [[Q2]]_e ((|inouts_v = inouts_v 2|), (|inouts_v = inouts_v 2'|))
    using a2 by auto
  then have N2: length(inouts_v 2' n) = n2
    using P2 SimBlock-implies-Qn s2 by blast
  show length(inouts_v 1' n) + length(inouts_v 2' n) = n1 + n2
    using N1 N2 by auto
 qed
 from c1 c2 c3 show ?thesis
  apply (simp add: SimBlock-def)
 done
qed

lemma inps-parallel:
 assumes s1: SimBlock m1 n1 (P1 ⊢_n Q1)
 assumes s2: SimBlock m2 n2 (P2 ⊢_n Q2)
 shows inps ((P1 ⊢_n Q1) ‖_B (P2 ⊢_n Q2)) = m1 + m2
 using SimBlock-parallel inps-outps s1 s2 by blast

lemma outps-parallel:
 assumes s1: SimBlock m1 n1 (P1 ⊢_n Q1)
 assumes s2: SimBlock m2 n2 (P2 ⊢_n Q2)
 shows outps ((P1 ⊢_n Q1) ‖_B (P2 ⊢_n Q2)) = n1 + n2
  using SimBlock-parallel inps-outps
  using s1 s2 by blast
```

Associativity of parallel composition.

```
lemma parallel-ass:
 assumes s1: SimBlock m0 n0 (P0 ⊢_n Q0)
 assumes s2: SimBlock m1 n1 (P1 ⊢_n Q1)
 assumes s3: SimBlock m2 n2 (P2 ⊢_n Q2)
 shows ((P0 ⊢_n Q0) ‖_B ((P1 ⊢_n Q1) ‖_B (P2 ⊢_n Q2))) = (((P0 ⊢_n Q0) ‖_B (P1 ⊢_n Q1)) ‖_B (P2
⊢_n Q2))
  (is ?lhs = ?rhs)
 proof −
  let ?P12 = ∃ (ok_1, ok_2, inouts_1, inouts_2) ·
       (((takem (m1+m2) (m1)) ;; (P1 ⊢_n Q1))[[«ok_1»,«inouts_1»/$ok´,$v_D:inouts´]] ∧
       ((dropm (m1+m2) (m2)) ;; (P2 ⊢_n Q2))[[«ok_2»,«inouts_2»/$ok´,$v_D:inouts´]] ∧
       (∀ n::nat · ($v_D:inouts´ («n»)_a =_u («append» («inouts_1 n»)_a («inouts_2 n»)_a))) ∧
       ($ok´ =_u («ok_1» ∧ «ok_2»)))
  have lhs-12: ((P1 ⊢_n Q1) ‖_B (P2 ⊢_n Q2)) = ?P12
   using SimParallel-form s2 s3 by blast
  have lhs-12-sim: SimBlock (m1+m2) (n1+n2) ((P1 ⊢_n Q1) ‖_B (P2 ⊢_n Q2))
   by (simp add: SimBlock-parallel s2 s3)
  then have lhs-sim: ?lhs =
      (∃ (ok_0, ok_12, inouts_0, inouts_12) ·
        (((takem (m0+(m1+m2)) (m0)) ;; (P0 ⊢_n Q0))[[«ok_0»,«inouts_0»/$ok´,$v_D:inouts´]] ∧
        ((dropm (m0+(m1+m2)) (m1+m2)) ;; ?P12)[[«ok_12»,«inouts_12»/$ok´,$v_D:inouts´]] ∧
        (∀ n::nat · ($v_D:inouts´ («n»)_a =_u («append» («inouts_0 n»)_a («inouts_12 n»)_a))) ∧
        ($ok´ =_u («ok_0» ∧ «ok_12»))))
   using lhs-12-sim lhs-12 SimParallel-form s1 s2 s3 by auto
```

let *?P01* = ∃ (ok_0, ok_1, $inouts_0$, $inouts_1$) ·
(((*takem* (*m0*+*m1*) (*m0*)) ; ; (*P0* ⊢$_n$ *Q0*))⟦«ok_0»,«$inouts_0$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
((*dropm* (*m0*+*m1*) (*m1*)) ; ; (*P1* ⊢$_n$ *Q1*))⟦«ok_1»,«$inouts_1$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
(∀ *n*::*nat* · ($$\mathbf{v}_D$:*inouts´* («*n*»)$_a$ =$_u$ («*append*» («$inouts_0$ *n*»)$_a$ («$inouts_1$ *n*»)$_a$))) ∧
($ok´ =$_u$ («ok_0» ∧ «ok_1»)))
have *rhs-01*: ((*P0* ⊢$_n$ *Q0*) ‖$_B$ (*P1* ⊢$_n$ *Q1*)) = *?P01*
using *SimParallel-form s1 s2* **by** *blast*
have *rhs-01-sim*: *SimBlock* (*m0*+*m1*) (*n0*+*n1*) ((*P0* ⊢$_n$ *Q0*) ‖$_B$ (*P1* ⊢$_n$ *Q1*))
by (*simp add*: *SimBlock-parallel s1 s2*)
then have *rhs-sim*: *?rhs* =
(∃ (ok_{01}, ok_2, $inouts_{01}$, $inouts_2$) ·
(((*takem* ((*m0*+*m1*)+*m2*) (*m0*+*m1*)) ; ; *?P01*)⟦«ok_{01}»,«$inouts_{01}$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
((*dropm* ((*m0*+*m1*)+*m2*) (*m2*)) ; ; (*P2* ⊢$_n$ *Q2*))⟦«ok_2»,«$inouts_2$»/$ok´,$$\mathbf{v}_D$:*inouts´*⟧ ∧
(∀ *n*::*nat* · ($$\mathbf{v}_D$:*inouts´* («*n*»)$_a$ =$_u$ («*append*» («$inouts_{01}$ *n*»)$_a$ («$inouts_2$ *n*»)$_a$))) ∧
($ok´ =$_u$ («ok_{01}» ∧ «ok_2»))))
using *rhs-01-sim rhs-01 SimParallel-form s1 s2 s3* **by** *auto*
show *?thesis*
apply (*simp add*: *lhs-sim rhs-sim*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
apply (*rule iffI*)
— Subgoal 1: lhs –> rhs
apply (*clarify*)
apply (*rename-tac* ok_v $inouts_v$ ok_v' $inouts_v'$ $ok_v'q0$ *aa* $inouts_v'q0$ ok_vp0 $inouts_v'12$ $inouts_vp0$ ok_v12
$inouts_v12$ $ok_v'q1$ $ok_v'q2$ $inouts_v'q1$ ok_vp1 $inouts_v'q2$ $inouts_vp1$ ok_vp2 $inouts_vp2$)
apply (*rule-tac x* = $ok_v'q0$ ∧ $ok_v'q1$ **in** *exI*)
apply (*rule-tac x* = $ok_v'q2$ **in** *exI*)
apply (*rule-tac x* = λ*na*. ($inouts_v'q0$ *na* • $inouts_v'q1$ *na*) **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac x* = ok_v **in** *exI*)
apply (*rule-tac x* = λ*na*. ($inouts_vp0$ *na* • $inouts_vp1$ *na*) **in** *exI*)
apply (*rule conjI*)
apply (*clarify*)
apply (*smt ab-semigroup-add-class.add-ac*(*1*) *drop-0 gr0I length-append list.size*(*3*)
self-append-conv take-add)
apply (*rule-tac x* = $ok_v'q0$ **in** *exI*)
apply (*rule-tac x* = $ok_v'q1$ **in** *exI*)
apply (*rule-tac x* = $inouts_v'q0$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac x* = ok_vp0 **in** *exI*)
apply (*rule-tac x* = $inouts_vp0$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*metis gr0I length-0-conv*)
apply *blast*
apply (*rule-tac x* = $inouts_v'q1$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac x* = ok_vp1 **in** *exI*)
apply (*rule-tac x* = $inouts_vp1$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*metis append-eq-conv-conj drop-append list.size*(*3*) *neq0-conv*)
apply *blast*
apply *blast*
apply (*rule-tac x* = $inouts_v'q2$ **in** *exI*)

apply (*rule conjI*, *simp*)
apply (*rule-tac* $x = ok_v p2$ **in** *exI*)
apply (*rule-tac* $x = inouts_v p2$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*metis add-cancel-left-right drop-drop gr0I semiring-normalization-rules*(*24*))
apply *blast*
apply *auto*[*1*]
— Subgoal 2: rhs –> lhs
apply (*clarify*)
apply (*rename-tac* ok_v $inouts_v$ ok_v' $inouts_v'$ *a* $ok_v'q2$ $inouts_v'01$ ok_v01 $inouts_v'q2$ $inouts_v01$ $ok_v p2$ $inouts_v p2$
$ok_v'q0$ $ok_v'q1$ $inouts_v'q0$ $ok_v p0$ $inouts_v'q1$ $inouts_v p0$ $ok_v p1$ $inouts_v p1$)
apply (*rule-tac* $x = ok_v'q0$ **in** *exI*)
apply (*rule-tac* $x = ok_v'q1 \wedge ok_v'q2$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ (inouts_v'q0\ na)$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ (inouts_v p0\ na)$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*rule impI*)
apply (*rule allI*)
apply (*rule conjI*)
apply (*metis add-cancel-left-left zero-less-iff-neq-zero*)
apply (*metis append.right-neutral append-take-drop-id diff-is-0-eq le-add1 take-0 take-append*)
apply *blast*
apply (*rule-tac* $x = \lambda na.\ (inouts_v'q1\ na \bullet inouts_v'q2\ na)$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ (inouts_v p1\ na \bullet inouts_v p2\ na)$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*rule impI*)
apply (*rule allI*)
apply (*rule conjI*)
apply (*smt add.commute append-take-drop-id drop-drop length-append length-greater-0-conv less-add-same-cancel2 neq0-conv take-drop*)
apply (*rule impI*)
apply (*rule conjI*)
apply (*metis gr-zeroI list.size*(*3*))
apply (*metis* (*no-types*, *hide-lams*) *add.left-neutral append-take-drop-id diff-add-zero drop-0 drop-append neq0-conv plus-list-def zero-list-def*)
apply (*rule-tac* $x = ok_v'q1$ **in** *exI*)
apply (*rule-tac* $x = ok_v'q2$ **in** *exI*)
apply (*rule-tac* $x = inouts_v'q1$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*metis gr0I length-0-conv*)
apply (*rule-tac* $x = inouts_v'q2$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v p2$ **in** *exI*)
apply (*rule-tac* $x = inouts_v p2$ **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*metis append-eq-conv-conj drop-append list.size*(*3*) *neq0-conv*)
apply *blast*
apply *blast*
apply (*rule conjI*, *simp*)
by *blast*

qed

lemma *refinement-implies-r*:
assumes *s1*: $(P1 \vdash_r Q1) \sqsubseteq (P1r \vdash_r Q1r)$
shows $\forall\, ok_v\ inouts_v\ ok_v{}'\ inouts_v{}'.$
$(ok_v \wedge [\![P1r]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = inouts_v{}'|\!)) \longrightarrow$
$ok_v{}' \wedge [\![Q1r]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = inouts_v{}'|\!))) \longrightarrow$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = inouts_v{}'|\!)) \longrightarrow$
$ok_v{}' \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = inouts_v{}'|\!)))$
using *s1* **apply** (*rel-simp*)
by *blast*

lemma *refinement-implies*:
assumes *s1*: $(P1 \vdash_n Q1) \sqsubseteq (P1r \vdash_n Q1r)$
shows $\forall\, ok_v\ inouts_v\ ok_v{}'\ inouts_v{}'.$
$(ok_v \wedge [\![P1r]\!]_e\ ((\!|inouts_v = inouts_v|\!)) \longrightarrow$
$ok_v{}' \wedge [\![Q1r]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = inouts_v{}'|\!))) \longrightarrow$
$(ok_v \wedge [\![P1]\!]_e\ ((\!|inouts_v = inouts_v|\!)) \longrightarrow$
$ok_v{}' \wedge [\![Q1]\!]_e\ ((\!|inouts_v = inouts_v|\!), (\!|inouts_v = inouts_v{}'|\!)))$
using *s1* **apply** (*rel-simp*)
by *blast*

lemma *parallel-mono-r*:
assumes *s1*: *SimBlock m1 n1* $(P1 \vdash_r Q1)$
assumes *s2*: *SimBlock m2 n2* $(P2 \vdash_r Q2)$
assumes *s3*: *SimBlock m1 n1* $(P1r \vdash_r Q1r)$
assumes *s4*: *SimBlock m2 n2* $(P2r \vdash_r Q2r)$
assumes *s5*: $(P1 \vdash_r Q1) \sqsubseteq (P1r \vdash_r Q1r)$
assumes *s6*: $(P2 \vdash_r Q2) \sqsubseteq (P2r \vdash_r Q2r)$
shows $((P1 \vdash_r Q1) \parallel_B (P2 \vdash_r Q2)) \sqsubseteq ((P1r \vdash_r Q1r) \parallel_B (P2r \vdash_r Q2r))$
proof −
have *pform*: $((P1 \vdash_r Q1) \parallel_B (P2 \vdash_r Q2)) =$
$(\exists\ (ok_0, ok_1, inouts_0, inouts_1) \cdot$
$(((takem\ (m1{+}m2)\ (m1))\ ;;\ (P1 \vdash_r Q1))[\![«ok_0»,«inouts_0»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$((dropm\ (m1{+}m2)\ (m2))\ ;;\ (P2 \vdash_r Q2))[\![«ok_1»,«inouts_1»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$(\forall\ n{::}nat \cdot (\$\mathbf{v}_D{:}inouts´\ («n»)_a =_u («append»\ («inouts_0\ n»)_a\ («inouts_1\ n»)_a))) \wedge$
$(\$ok´ =_u («ok_0» \wedge «ok_1»))))$
using *SimParallel-form s1 s2* **by** *auto*
have *pform′*: $((P1r \vdash_r Q1r) \parallel_B (P2r \vdash_r Q2r)) =$
$(\exists\ (ok_0, ok_1, inouts_0, inouts_1) \cdot$
$(((takem\ (m1{+}m2)\ (m1))\ ;;\ (P1r \vdash_r Q1r))[\![«ok_0»,«inouts_0»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$((dropm\ (m1{+}m2)\ (m2))\ ;;\ (P2r \vdash_r Q2r))[\![«ok_1»,«inouts_1»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$(\forall\ n{::}nat \cdot (\$\mathbf{v}_D{:}inouts´\ («n»)_a =_u («append»\ («inouts_0\ n»)_a\ («inouts_1\ n»)_a))) \wedge$
$(\$ok´ =_u («ok_0» \wedge «ok_1»))))$
using *SimParallel-form s3 s4* **by** *auto*
show *?thesis*
apply (*simp add*: *pform pform′*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
apply (*rename-tac* ok_v $inouts_v$ $inouts_v{}'$ $ok_v q1r$ $ok_v q2r$ $inouts_v 1r'$ $ok_v p1r$ $inouts_v 2r'$ $inouts_v 1r$ $ok_v p2r$ $inouts_v 2r$)
apply (*rule-tac* $x = ok_v q1r$ **in** *exI*)
apply (*rule-tac* $x = ok_v q2r$ **in** *exI*)
apply (*rule-tac* $x = inouts_v 1r'$ **in** *exI*)

apply (*simp*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v p1r$ **in** *exI*, *simp*)
apply (*rule-tac* $x = inouts_v 1r$ **in** *exI*)
apply (*rule conjI*)
apply *simp*
using *s5 s1 refinement-implies-r* **apply** (*metis*)
apply (*rule-tac* $x = inouts_v 2r'$ **in** *exI*, *simp*)
apply (*rule-tac* $x = ok_v p2r$ **in** *exI*)
apply *simp*
apply (*rule-tac* $x = inouts_v 2r$ **in** *exI*, *simp*)
using *s6 s2 refinement-implies-r* **apply** (*metis*)
done
qed

lemma *parallel-mono*:
assumes *s1*: *SimBlock m1 n1* $(P1 \vdash_n Q1)$
assumes *s2*: *SimBlock m2 n2* $(P2 \vdash_n Q2)$
assumes *s3*: *SimBlock m1 n1* $(P1r \vdash_n Q1r)$
assumes *s4*: *SimBlock m2 n2* $(P2r \vdash_n Q2r)$
assumes *s5*: $(P1 \vdash_n Q1) \sqsubseteq (P1r \vdash_n Q1r)$
assumes *s6*: $(P2 \vdash_n Q2) \sqsubseteq (P2r \vdash_n Q2r)$
shows $((P1 \vdash_n Q1) \parallel_B (P2 \vdash_n Q2)) \sqsubseteq ((P1r \vdash_n Q1r) \parallel_B (P2r \vdash_n Q2r))$
proof −
have *pform*: $((P1 \vdash_n Q1) \parallel_B (P2 \vdash_n Q2)) =$
$(\exists\ (ok_0,\ ok_1,\ inouts_0,\ inouts_1) \cdot$
$(((takem\ (m1{+}m2)\ (m1))\ ;;\ (P1 \vdash_n Q1))[\![«ok_0»,«inouts_0»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$((dropm\ (m1{+}m2)\ (m2))\ ;;\ (P2 \vdash_n Q2))[\![«ok_1»,«inouts_1»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$(\forall\ n{::}nat \cdot (\$\mathbf{v}_D{:}inouts´\ («n»)_a =_u («append»\ («inouts_0\ n»)_a\ («inouts_1\ n»)_a))) \wedge$
$(\$ok´ =_u («ok_0» \wedge «ok_1»))))$
using *SimParallel-form s1 s2* **by** *auto*
have *pform'*: $((P1r \vdash_n Q1r) \parallel_B (P2r \vdash_n Q2r)) =$
$(\exists\ (ok_0,\ ok_1,\ inouts_0,\ inouts_1) \cdot$
$(((takem\ (m1{+}m2)\ (m1))\ ;;\ (P1r \vdash_n Q1r))[\![«ok_0»,«inouts_0»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$((dropm\ (m1{+}m2)\ (m2))\ ;;\ (P2r \vdash_n Q2r))[\![«ok_1»,«inouts_1»/\$ok´,\$\mathbf{v}_D{:}inouts´]\!] \wedge$
$(\forall\ n{::}nat \cdot (\$\mathbf{v}_D{:}inouts´\ («n»)_a =_u («append»\ («inouts_0\ n»)_a\ («inouts_1\ n»)_a))) \wedge$
$(\$ok´ =_u («ok_0» \wedge «ok_1»))))$
using *SimParallel-form s3 s4* **by** *auto*
show *?thesis*
apply (*simp add*: *pform pform'*)
apply (*simp add*: *sim-blocks*)
apply (*rel-simp*)
apply (*rename-tac* ok_v $inouts_v$ $inouts_v'$ $ok_v q1r$ $ok_v q2r$ $inouts_v 1r'$ $ok_v p1r$ $inouts_v 2r'$ $inouts_v 1r$ $ok_v p2r$ $inouts_v 2r$)
apply (*rule-tac* $x = ok_v q1r$ **in** *exI*)
apply (*rule-tac* $x = ok_v q2r$ **in** *exI*)
apply (*rule-tac* $x = inouts_v 1r'$ **in** *exI*)
apply (*simp*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v p1r$ **in** *exI*, *simp*)
apply (*rule-tac* $x = inouts_v 1r$ **in** *exI*)
apply (*rule conjI*)
apply *simp*
using *s5 s1 refinement-implies* **apply** (*metis*)
apply (*rule-tac* $x = inouts_v 2r'$ **in** *exI*, *simp*)

```
    apply (rule-tac x = ok_v p2r in exI)
    apply simp
    apply (rule-tac x = inouts_v 2r in exI, simp)
    using s6 s2 refinement-implies apply (metis)
   done
  qed

lemma FBlock-parallel-comp-id:
  assumes s1: SimBlock 1 1 (FBlock (λx n. True) 1 1 f-Id)
  shows (FBlock (λx n. True) 1 1 f-Id) ‖_B (FBlock (λx n. True) 1 1 f-Id)
    = FBlock (λx n. True) 2 2 (λx n. (((f-Id ∘ (λxx nn. take 1 (xx nn))) x n)
                        • ((f-Id ∘ (λxx nn. drop 1 (xx nn)))) x n))
  proof −
    have inps-1: inps (FBlock (λx n. True) (Suc 0) (Suc 0) f-Id) = 1
      using s1 by (simp add: inps-P)
    have form: ((FBlock (λx n. True) 1 1 f-Id) ‖_B (FBlock (λx n. True) 1 1 f-Id)) =
          (∃ (ok_0, ok_1, inouts_0, inouts_1) ·
            (((takem (1+1) (1)) ; ; (FBlock (λx n. True) 1 1 f-Id))⟦«ok_0»,«inouts_0»/$ok´,$v_D:inouts´⟧
∧
            ((dropm (1+1) (1)) ; ; (FBlock (λx n. True) 1 1 f-Id))⟦«ok_1»,«inouts_1»/$ok´,$v_D:inouts´⟧
∧
            (∀ n::nat · ($v_D:inouts´ («n»)_a =_u («append» («inouts_0 n»)_a («inouts_1 n»)_a))) ∧
            ($ok´ =_u («ok_0» ∧ «ok_1»))))
      using s1 by (simp add: SimParallel-form)
    have 2: (∃ (ok_0, ok_1, inouts_0, inouts_1) ·
            (((takem (1+1) (1)) ; ; (FBlock (λx n. True) 1 1 f-Id))⟦«ok_0»,«inouts_0»/$ok´,$v_D:inouts´⟧
∧
            ((dropm (1+1) (1)) ; ; (FBlock (λx n. True) 1 1 f-Id))⟦«ok_1»,«inouts_1»/$ok´,$v_D:inouts´⟧
∧
            (∀ n::nat · ($v_D:inouts´ («n»)_a =_u («append» («inouts_0 n»)_a («inouts_1 n»)_a))) ∧
            ($ok´ =_u («ok_0» ∧ «ok_1»))))
        = FBlock (λx n. True) 2 2 (λx n. (((f-Id ∘ (λxx nn. take 1 (xx nn))) x n)
                        • ((f-Id ∘ (λxx nn. drop 1 (xx nn)))) x n))
      apply (simp add: FBlock-def f-Id-def takem-def dropm-def)
      apply (rel-auto)
      apply (simp add: f-Id-def)
      apply (rule-tac x = ok_v' in exI)
      apply (rule-tac x = ok_v' in exI)
      apply (rule-tac x = inouts_v' in exI)
      apply (rule conjI)
      apply blast
      apply (rule-tac x = λna. [] in exI)
      apply blast
      apply (rule-tac x = ok_v' in exI)
      apply (rule-tac x = ok_v' in exI)
      apply (rule-tac x = λna. take (Suc 0) (inouts_v na) in exI)
      apply (rule conjI)
      apply (rule-tac x = ok_v' in exI)
      apply (rule-tac x = λna. take (Suc 0) (inouts_v na) in exI)
      apply (metis (no-types, lifting) Nitpick.size-list-simp(2) f-Id-def less-numeral-extra(3)
        list.sel(1) pos2 take-Suc take-eq-Nil take-tl)
      apply (rule-tac x = λna. drop (Suc 0) (inouts_v na) in exI)
      apply (rule conjI)
      apply (rule-tac x = ok_v' in exI)
      apply (rule-tac x = λna. drop (Suc 0) (inouts_v na) in exI)
```

apply (*metis* (*no-types*, *lifting*) *Cons-nth-drop-Suc One-nat-def Suc-le-mono diff-Suc-1*
drop-eq-Nil f-Id-def hd-drop-conv-nth le-numeral-extra(*4*) *length-drop lessI numeral-2-eq-2*)
by (*metis Cons-nth-drop-Suc Suc-1 Suc-eq-plus1 add.left-neutral append-take-drop-id drop-0*
drop-eq-Nil lessI list.sel(*1*) *order-refl take-Suc zero-less-Suc*)
show *?thesis*
using *form 2*
by *simp*
qed

lemma *FBlock-parallel-comp*:
assumes *s1*: *SimBlock m1 n1* (*FBlock* (λ*x n*. *True*) *m1 n1 f*)
assumes *s2*: *SimBlock m2 n2* (*FBlock* (λ*x n*. *True*) *m2 n2 g*)
shows (*FBlock* (λ*x n*. *True*) *m1 n1 f*) $\|_B$ (*FBlock* (λ*x n*. *True*) *m2 n2 g*)
= *FBlock* (λ*x n*. *True*) (*m1*+*m2*) (*n1*+*n2*)
(λ*x n*. (((*f* ∘ (λ*xx nn*. *take m1* (*xx nn*))) *x n*) • ((*g* ∘ (λ*xx nn*. *drop m1* (*xx nn*)))) *x n*))
proof −
have *inps-1*: *inps* (*FBlock* (λ*x n*. *True*) *m1 n1 f*) = *m1*
using *s1* **by** (*simp add*: *inps-P*)
have *inps-2*: *inps* (*FBlock* (λ*x n*. *True*) *m2 n2 g*) = *m2*
using *s2* **by** (*simp add*: *inps-P*)
have *form*: ((*FBlock* (λ*x n*. *True*) *m1 n1 f*) $\|_B$ (*FBlock* (λ*x n*. *True*) *m2 n2 g*)) =
(∃ (ok_0, ok_1, $inouts_0$, $inouts_1$) ·
(((*takem* (*m1*+*m2*) (*m1*)) ; ; (*FBlock* (λ*x n*. *True*) *m1 n1 f*))⟦«ok_0»,«$inouts_0$»/$*ok´*,$**v**$_D$:*inouts´*⟧
∧
((*dropm* (*m1*+*m2*) (*m2*)) ; ; (*FBlock* (λ*x n*. *True*) *m2 n2 g*))⟦«ok_1»,«$inouts_1$»/$*ok´*,$**v**$_D$:*inouts´*⟧
∧
(∀ *n*::*nat* · ($**v**$_D:*inouts´* («*n*»)$_a$ =$_u$ («*append*» («$inouts_0$ *n*»)$_a$ («$inouts_1$ *n*»)$_a$))) ∧
($*ok´* =$_u$ («ok_0» ∧ «ok_1»))))
using *s1 s2* **by** (*simp add*: *SimParallel-form*)
have *2*: (∃ (ok_0, ok_1, $inouts_0$, $inouts_1$) ·
(((*takem* (*m1*+*m2*) (*m1*)) ; ; (*FBlock* (λ*x n*. *True*) *m1 n1 f*))⟦«ok_0»,«$inouts_0$»/$*ok´*,$**v**$_D$:*inouts´*⟧
∧
((*dropm* (*m1*+*m2*) (*m2*)) ; ; (*FBlock* (λ*x n*. *True*) *m2 n2 g*))⟦«ok_1»,«$inouts_1$»/$*ok´*,$**v**$_D$:*inouts´*⟧
∧
(∀ *n*::*nat* · ($**v**$_D:*inouts´* («*n*»)$_a$ =$_u$ («*append*» («$inouts_0$ *n*»)$_a$ («$inouts_1$ *n*»)$_a$))) ∧
($*ok´* =$_u$ («ok_0» ∧ «ok_1»))))
= *FBlock* (λ*x n*. *True*) (*m1*+*m2*) (*n1*+*n2*)
(λ*x n*. (((*f* ∘ (λ*xx nn*. *take m1* (*xx nn*))) *x n*) • ((*g* ∘ (λ*xx nn*. *drop m1* (*xx nn*)))) *x n*))
apply (*simp add*: *FBlock-def f-Id-def takem-def dropm-def*)
apply (*rel-simp*)
apply (*rule iffI*)
apply (*clarify*)
apply (*rule conjI*, *simp*)
apply (*rule conjI*, *simp*)
proof −
fix ok_v $inouts_v$ $inouts_v'$ *a aa ab* ok_v'' *b* $inouts_v''$::*nat* ⇒ *real list* **and** ok_v''' **and**
$inouts_v'''$::*nat* ⇒ *real list*
assume *a1*: ∀ *x*. (*m1* = *0* ⟶ *length*($inouts_v$ *x*) = *m2* ∧ $inouts_v''$ *x* = []) ∧
(*0* < *m1* ⟶ *length*($inouts_v$ *x*) = *m1* + *m2* ∧ *take m1* ($inouts_v$ *x*) = $inouts_v''$ *x*)
assume *a2*: ∀ *x*. (*m2* = *0* ⟶ *length*($inouts_v$ *x*) = *m1* ∧ $inouts_v'''$ *x* = []) ∧
(*0* < *m2* ⟶ *length*($inouts_v$ *x*) = *m1* + *m2* ∧ *drop m1* ($inouts_v$ *x*) = $inouts_v'''$ *x*)
assume *a3*: ∀ *x*. *length*($inouts_v''$ *x*) = *m1* ∧ *length*(*ab x*) = *n1* ∧ *f* $inouts_v''$ *x* = *ab x*
assume *a4*: ∀ *x*. *length*($inouts_v'''$ *x*) = *m2* ∧ *length*(*b x*) = *n2* ∧ *g* $inouts_v'''$ *x* = *b x*
from *a1* **have** *1*: ∀ *x*. *take m1* ($inouts_v$ *x*) = $inouts_v''$ *x*
by *fastforce*

then have *11*: $inouts_v'' = (\lambda x.\ take\ m1\ (inouts_v\ x))$
using *a1* **by** *force*
from *a3* **have** *2*: $\forall x.\ f\ inouts_v''\ x = ab\ x$
by *blast*
from *11* **and** *2* **have** *3*: $\forall x.\ f\ (\lambda x.\ take\ m1\ (inouts_v\ x))\ x = ab\ x$
by *blast*
from *a2* **have** *g1*: $\forall x.\ (drop\ m1\ (inouts_v\ x) = inouts_v'''\ x)$
by *fastforce*
then have *g11*: $inouts_v''' = (\lambda x.\ drop\ m1\ (inouts_v\ x))$
by *force*
from *a4* **have** *g2*: $\forall x.\ g\ inouts_v'''\ x = b\ x$
by *blast*
from *g11* **and** *g2* **have** *g3*: $\forall x.\ g\ (\lambda x.\ drop\ m1\ (inouts_v\ x))\ x = b\ x$
by *blast*
show $\forall x.\ length(inouts_v\ x) = m1 + m2 \wedge$
$f\ (\lambda nn.\ take\ m1\ (inouts_v\ nn))\ x \bullet g\ (\lambda nn.\ drop\ m1\ (inouts_v\ nn))\ x = ab\ x \bullet b\ x$
apply (*rule allI*)
apply (*rule conjI*)
using *a2* **apply** *auto*[*1*]
by (*simp add*: *3 g3*)
next
assume *a1*: $\forall x\ xa.\ length(x\ xa) = m1 \longrightarrow length(f\ x\ xa) = n1$
assume *a2*: $\forall x\ xa.\ length(x\ xa) = m2 \longrightarrow length(g\ x\ xa) = n2$
show $\forall x\ xa.\ length(x\ xa) = m1 + m2 \longrightarrow$
$length(f\ (\lambda nn.\ take\ m1\ (x\ nn))\ xa) + length(g\ (\lambda nn.\ drop\ m1\ (x\ nn))\ xa) = n1 + n2$
using *a1 a2* **by** *simp*
next
fix $ok_v\ inouts_v\ ok_v'\ inouts_v'$
assume *a1*: $ok_v \longrightarrow$
$ok_v' \wedge$
$(\forall x.\ length(inouts_v\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = n1 + n2 \wedge$
$f\ (\lambda nn.\ take\ m1\ (inouts_v\ nn))\ x \bullet g\ (\lambda nn.\ drop\ m1\ (inouts_v\ nn))\ x = inouts_v'\ x) \wedge$
$(\forall x\ xa.\ length(x\ xa) = m1 + m2 \longrightarrow$
$length(f\ (\lambda nn.\ take\ m1\ (x\ nn))\ xa) + length(g\ (\lambda nn.\ drop\ m1\ (x\ nn))\ xa) = n1 + n2)$
from *a1* **show** $\exists a\ aa\ ab.$
$(\exists ok_v'\ inouts_v'.$
$(ok_v \longrightarrow$
$ok_v' \wedge$
$(\forall x.\ (m1 = 0 \longrightarrow length(inouts_v\ x) = m2 \wedge inouts_v'\ x = []) \wedge$
$(0 < m1 \longrightarrow$
$length(inouts_v\ x) = m1 + m2 \wedge length(inouts_v'\ x) = m1 \wedge take\ m1\ (inouts_v\ x) =$
$inouts_v'\ x))) \wedge$
$(ok_v' \longrightarrow$
$a \wedge (\forall x.\ length(inouts_v'\ x) = m1 \wedge length(ab\ x) = n1 \wedge f\ inouts_v'\ x = ab\ x) \wedge$
$(\forall x\ xa.\ length(x\ xa) = m1 \longrightarrow length(f\ x\ xa) = n1))) \wedge$
$(\exists b.\ (\exists ok_v'\ inouts_v'.$
$(ok_v \longrightarrow$
$ok_v' \wedge$
$(\forall x.\ (m2 = 0 \longrightarrow length(inouts_v\ x) = m1 \wedge inouts_v'\ x = []) \wedge$
$(0 < m2 \longrightarrow$
$length(inouts_v\ x) = m1 + m2 \wedge$
$length(inouts_v'\ x) = m2 \wedge drop\ m1\ (inouts_v\ x) = inouts_v'\ x))) \wedge$
$(ok_v' \longrightarrow$
$aa \wedge (\forall x.\ length(inouts_v'\ x) = m2 \wedge length(b\ x) = n2 \wedge g\ inouts_v'\ x = b\ x) \wedge$

$(\forall\, x\ xa.\ length(x\ xa) = m2 \longrightarrow length(g\ x\ xa) = n2))) \wedge$
$(\forall\, x.\ inouts_v{}'\ x = ab\ x \bullet b\ x) \wedge ok_v{}' = (a \wedge aa))$
apply (*rel-auto*)
apply (*rule-tac* $x = ok_v{}'$ **in** *exI*)
apply (*rule-tac* $x = ok_v{}'$ **in** *exI*)
apply (*rule-tac* $x = inouts_v{}'$ **in** *exI*)
apply (*rule conjI*)
apply *blast*
using *take-0* **apply** *blast*
apply (*rule-tac* $x = ok_v{}'$ **in** *exI*)
apply (*rule-tac* $x = ok_v{}'$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ f\ (\lambda nx.\ take\ m1\ (inouts_v\ nx))\ na$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v{}'$ **in** *exI*)
apply (*rule-tac* $x = \lambda nx.\ take\ m1\ (inouts_v\ nx)$ **in** *exI*)
using *SimBlock-FBlock-fn s1* **apply** *auto*[*1*]
apply (*rule-tac* $x = \lambda na.\ g\ (\lambda nx.\ drop\ m1\ (inouts_v\ nx))\ na$ **in** *exI*)
apply (*rule conjI*)
apply (*rule-tac* $x = ok_v{}'$ **in** *exI*)
apply (*rule-tac* $x = \lambda nx.\ drop\ m1\ (inouts_v\ nx)$ **in** *exI*)
using *SimBlock-FBlock-fn s2* **apply** *auto*[*1*]
by *simp*
qed
show *?thesis*
using *2 form* **by** *simp*
qed

lemma *SimBlock-FBlock-parallel-comp* [*simblock-healthy*]:
assumes *s1*: *SimBlock m1 n1* (*FBlock* ($\lambda x\ n.$ *True*) *m1 n1 f*)
assumes *s2*: *SimBlock m2 n2* (*FBlock* ($\lambda x\ n.$ *True*) *m2 n2 g*)
shows *SimBlock* (*m1*+*m2*) (*n1*+*n2*) ((*FBlock* ($\lambda x\ n.$ *True*) *m1 n1 f*) $\|_B$ (*FBlock* ($\lambda x\ n.$ *True*) *m2 n2 g*))
apply (*simp add*: *s1 s2 FBlock-parallel-comp*)
apply (*rule SimBlock-FBlock*)
proof −
obtain $inouts_v$::*nat* ⇒ *real list* **where** *P*: $\forall\, na.\ length(inouts_v\ na) = m1 + m2$
using *list-len-avail* **by** *auto*
show $\exists\, inouts_v\ inouts_v{}'.$
$\forall\, x.\ length(inouts_v{}'\ x) = n1 + n2 \wedge$
$length(inouts_v\ x) = m1 + m2 \wedge$
$f\ (\lambda nn.\ take\ m1\ (inouts_v\ nn))\ x \bullet g\ (\lambda nn.\ drop\ m1\ (inouts_v\ nn))\ x = inouts_v{}'\ x$
apply (*rule-tac* $x = inouts_v$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ (f\ (\lambda nn.\ take\ m1\ (inouts_v\ nn))\ na \bullet g\ (\lambda nn.\ drop\ m1\ (inouts_v\ nn))\ na)$ **in** *exI*)
using *P SimBlock-FBlock-fn s1 s2* **by** *auto*
next
show $\forall\, x\ na.\ length(x\ na) = m1 + m2 \longrightarrow$
$length(f\ (\lambda nn.\ take\ m1\ (x\ nn))\ na \bullet g\ (\lambda nn.\ drop\ m1\ (x\ nn))\ na) = n1 + n2$
using *SimBlock-FBlock-fn s1 s2* **by** *auto*
qed

B.4.4 Feedback

B.4.4.1 feedback

lemma *feedback-mono*:
fixes *m1* :: *nat* **and** *n1* :: *nat* **and** *i1* :: *nat* **and** *o1* :: *nat*
assumes *s1*: *SimBlock m1 n1 P1*

assumes *s2*: *SimBlock m1 n1 P2*
assumes *s3*: *P1* $\sqsubseteq$ *P2*
assumes *s4*: *i1* $<$ *m1*
assumes *s5*: *o1* $<$ *n1*
shows (*P1* f_D (*i1*,*o1*)) $\sqsubseteq$ (*P2* f_D (*i1*,*o1*))
apply (*simp add*: *f-sim-blocks*)
using *s1 s2* **apply** (*simp add*: *inps-P outps-P*)
apply (*rel-simp*)
apply (*auto*)
apply (*metis s3 upred-ref-iff*)
apply (*rule-tac x* = *x* **in** *exI*)
apply (*rule-tac x* = ok_v'' **in** *exI*)
apply (*rule-tac x* = $inouts_v''$ **in** *exI*)
apply (*rule-tac x* = ok_v''' **in** *exI*)
apply (*rule-tac x* = $inouts_v'''$ **in** *exI*)
apply (*metis s3 upred-ref-iff*)
apply (*rule-tac x* = *x* **in** *exI*)
apply (*rule-tac x* = *True* **in** *exI*)
apply (*rule-tac x* = $inouts_v''$ **in** *exI*)
apply (*rule conjI*)
apply *blast*
apply (*rule-tac x* = *False* **in** *exI*)
apply (*rule-tac x* = $inouts_v'''$ **in** *exI*)
apply (*meson s3 upred-ref-iff*)
apply (*rule-tac x* = *x* **in** *exI*)
apply (*rule-tac x* = *True* **in** *exI*)
apply (*rule-tac x* = $inouts_v''$ **in** *exI*)
apply (*rule conjI*)
apply *blast*
apply (*rule-tac x* = ok_v''' **in** *exI*)
apply (*rule-tac x* = $inouts_v'''$ **in** *exI*)
by (*metis s3 upred-ref-iff*)

lemma *sol-f-id*: *Solvable 0 0 1 1 f-Id*
by (*simp add*: *Solvable-def f-Id-def f-PreFD-def*)

lemma *sol-f-ud*: *Solvable 0 0 1 1* (*f-UnitDelay x0*)
apply (*simp add*: *Solvable-def f-UnitDelay-def f-PreFD-def*)
by (*auto*)

— The function which output is equal to its input plus 1 is not solvable
lemma ¬ *Solvable 0 0 1 1* ($\lambda x\ n.\ [hd(x\ n) + 1]$)
apply (*simp add*: *Solvable-def f-PreFD-def*)
by (*auto*)

lemma *sol-f-id-ud*: *Solvable 0 0 1 1* ((*f-UnitDelay x0*) $\circ$ (*f-Id*))
apply (*simp add*: *Solvable-def f-UnitDelay-def f-Id-def f-PreFD-def*)
by (*auto*)

lemma *sol-f-integrator*:
Solvable 1 1 2 2 (λx n. [*if n = 0 then x0 else* (x (n−1)!0) + (x (n−1)!1),
if n = 0 then x0 else (x (n−1)!0) + (x (n−1)!1)])
apply (*simp add*: *Solvable-def f-PreFD-def*)
apply (*clarify*)
apply (*rule-tac x* = λna. (*if na = 0 then x0 else* (*x0*+*sum-hd-signal inouts*$_0$ (*na*−1))) **in** *exI*)
apply (*simp*, *clarify*)
apply (*rule conjI*)
apply (*clarify*)
apply (*metis Nil-is-append-conv One-nat-def add.commute hd-append2 hd-conv-nth list.size*(3)
nth-append-length zero-neq-one)
apply (*clarify*)
proof −
fix *inouts*$_0$::*nat* ⇒ *real list* **and** *n*::*nat*
assume *a1*: ∀ *x*. *length*(*inouts*$_0$ *x*) = *Suc 0*
assume *a2*: ¬ *n* ≤ *Suc 0*
have *1*: (*inouts*$_0$ (*n* − *Suc 0*) • [*x0* + *sum-hd-signal inouts*$_0$ (*n* − *Suc* (*Suc 0*))])!(*0*)
= *hd*(*inouts*$_0$ (*n* − *Suc 0*))
using *a1 a2*
by (*metis One-nat-def hd-conv-nth le-numeral-extra*(*4*) *less-numeral-extra*(*1*) *list.size*(*3*)
not-one-le-zero nth-append)
have *2*: (*inouts*$_0$ (*n* − *Suc 0*) • [*x0* + *sum-hd-signal inouts*$_0$ (*n* − *Suc* (*Suc 0*))])!(*Suc 0*)
= *x0* + *sum-hd-signal inouts*$_0$ (*n* − *Suc* (*Suc 0*))
using *a1 a2*
by (*metis nth-append-length*)
have *3*: (*n* − (*Suc 0*)) = *Suc* (*n* − (*Suc* (*Suc 0*)))
using *a2* **by** *linarith*
show *x0* + *sum-hd-signal inouts*$_0$ (*n* − *Suc 0*) =
(*inouts*$_0$ (*n* − *Suc 0*) • [*x0* + *sum-hd-signal inouts*$_0$ (*n* − *Suc* (*Suc 0*))])!(*0*) +
(*inouts*$_0$ (*n* − *Suc 0*) • [*x0* + *sum-hd-signal inouts*$_0$ (*n* − *Suc* (*Suc 0*))])!(*Suc 0*)
apply (*simp add*: *1 2*)
using *a1 a2 3*
by *simp*
qed

lemma *Solvable-unique-is-solvable*:
assumes *Solvable-unique i1 o1 m n* (*f*)
shows *Solvable i1 o1 m n* (*f*)
using *assms* **apply** (*simp add*: *Solvable-unique-def Solvable-def*)
apply (*clarify*)
by *blast*

unique-solution-integrator: the integrator diagram has a unique solution.

lemma *unique-solution-integrator*:
fixes *inouts*$_0$::*nat* ⇒ *real list*
assumes *s1*: ∀ *n*. *length*(*inouts*$_0$ *n*) = *1*
shows ∃!*xx*. (∀ *n*. (*n* = *0* ⟶ *xx 0* = *x0*) ∧
(*0* < *n* ⟶ *xx n* = *hd*((*inouts*$_0$ (*n* − *Suc 0*))) + *xx* (*n* − *Suc 0*)))
apply (*rule ex-ex1I*)
apply (*rule-tac x* = λna. (*if na = 0 then x0 else* (*x0*+(∑ *i* ∈ {*0*..(*na*−*1*)}. *hd*((*inouts*$_0$ *i*))))) **in** *exI*)
apply (*simp*)
apply (*rule allI*)
proof −
fix *n*::*nat*

```
    show  ¬ n ≤ Suc 0 ⟶
      (∑ i = 0..n − Suc 0. hd (inouts0 i)) =
      hd (inouts0 (n − Suc 0)) + (∑ i = 0..n − Suc (Suc 0). hd (inouts0 i))
     proof (induct n)
      case 0
      thus ?case by auto
     next
      case (Suc n) note IH = this
      { assume Suc n = 1
        hence ?case by auto
      }
      also {
       assume Suc n > 1
       {
        assume Suc n = 2
        hence ?case by auto
       }
       also {
        assume Suc n > 2
        have ?case
         by (smt One-nat-def Suc-diff-Suc ‹1 < Suc n› sum.atLeast0-atMost-Suc)
       }
      }

      ultimately show ?case
       by (smt One-nat-def Suc-1 Suc-lessI cancel-comm-monoid-add-class.diff-cancel
          diff-Suc-1 not-less sum.atLeast0-atMost-Suc)
     qed
   next
    fix xx:: nat ⇒ real and y:: nat ⇒ real
    assume a1: ∀ n. (n = 0 ⟶ xx 0 = x0) ∧ (0 < n ⟶ xx n = hd (inouts0 (n − Suc 0)) + xx (n
− Suc 0))
    assume a2: ∀ n. (n = 0 ⟶ y 0 = x0) ∧ (0 < n ⟶ y n = hd (inouts0 (n − Suc 0)) + y (n −
Suc 0))
    have 1: ∀ n. xx n = y n
     apply (rule allI)
     proof −
      fix n::nat
      show xx n = y n
       proof (induct n)
        case 0
        then show ?case
         using a1 a2 by simp
       next
        case (Suc n) note IH = this
        then show ?case
         using a1 a2 by simp
       qed
     qed
    show xx = y
     using 1 fun-eq by (blast)
   qed

lemma FBlock-feedback:
  assumes s1: SimBlock m n (FBlock (λx n. True) m n f)
```

assumes *s2*: *Solvable-unique i1 o1 m n* (*f*)
shows (*FBlock* (λ*x n. True*) *m n f*) f_D (*i1*, *o1*)
= (*FBlock* (λ*x n. True*) (*m*−*1*) (*n*−*1*)
(λ*x na.* ((*f-PostFD o1*) *o f o* (*f-PreFD* (*Solution i1 o1 m n f x*) *i1*)) *x na*))
proof −
have *inps-1*: *inps* (*FBlock* (λ*x n. True*) *m n f*) = *m*
using *s1* **by** (*simp add*: *inps-P*)
have *outps-1*: *outps* (*FBlock* (λ*x n. True*) *m n f*) = *n*
using *s1* **by** (*simp add*: *outps-P*)
have *i1-lt-m*: *i1* < *m*
using *s2* **by** (*simp add*: *Solvable-unique-def*)
have *o1-lt-n*: *o1* < *n*
using *s2* **by** (*simp add*: *Solvable-unique-def*)
have *1*: (*FBlock* (λ*x n. True*) *m n f*) f_D (*i1*, *o1*) = (*true* $\vdash_n$ (∃ *x* ·
(∀ *n* · $\#_u(\$inouts(«n»)_a) =_u$ «*m* − *Suc 0*» ∧
$\#_u(\$inouts´(«n»)_a) =_u$ «*m*» ∧ $\$inouts´(«n»)_a =_u$ «*f-PreFD x i1*»$(\$inouts)_a(«n»)_a$)
; ;
((∀ *na* · $\#_u(\$inouts(«na»)_a) =_u$ «*m*» ∧
$\#_u(\$inouts´(«na»)_a) =_u$ «*n*» ∧ «*f*»$(\$inouts)_a(«na»)_a =_u \$inouts´(«na»)_a$) ∧
(∀ *x* · ∀ *na* · $\#_u$(«*x na*») =$_u$ «*m*» ⇒ $\#_u$(«*f x na*») =$_u$ «*n*»)) ; ;
(∀ *na* · $\#_u(\$inouts(«na»)_a) =_u$ «*n*» ∧
$\#_u(\$inouts´(«na»)_a) =_u$ «*n* − *Suc 0*» ∧
$\$inouts´(«na»)_a =_u$ «*f-PostFD o1*»$(\$inouts)_a(«na»)_a$ ∧
«*uapply*»$(\$inouts(«na»)_a)_a(«o1»)_a =_u$ «*x na*»)))
apply (*simp add*: *inps-1 outps-1*)
apply (*simp add*: *PreFD-def PostFD-def FBlock-def Solution-def*)
apply (*simp add*: *ndesign-composition-wp wp-upred-def*)
by (*rel-simp*)
have *2*: (*true* $\vdash_n$ (∃ *x* ·
(∀ *n* · $\#_u(\$inouts(«n»)_a) =_u$ «*m* − *Suc 0*» ∧
$\#_u(\$inouts´(«n»)_a) =_u$ «*m*» ∧ $\$inouts´(«n»)_a =_u$ «*f-PreFD x i1*»$(\$inouts)_a(«n»)_a$)
; ;
((∀ *na* · $\#_u(\$inouts(«na»)_a) =_u$ «*m*» ∧
$\#_u(\$inouts´(«na»)_a) =_u$ «*n*» ∧ «*f*»$(\$inouts)_a(«na»)_a =_u \$inouts´(«na»)_a$) ∧
(∀ *x* · ∀ *na* · $\#_u$(«*x na*») =$_u$ «*m*» ⇒ $\#_u$(«*f x na*») =$_u$ «*n*»)) ; ;
(∀ *na* · $\#_u(\$inouts(«na»)_a) =_u$ «*n*» ∧
$\#_u(\$inouts´(«na»)_a) =_u$ «*n* − *Suc 0*» ∧
$\$inouts´(«na»)_a =_u$ «*f-PostFD o1*»$(\$inouts)_a(«na»)_a$ ∧
«*uapply*»$(\$inouts(«na»)_a)_a(«o1»)_a =_u$ «*x na*»)))
= (*FBlock* (λ*x n. True*) (*m*−*1*) (*n*−*1*)
(λ*x na.* ((*f-PostFD o1*) *o f o* (*f-PreFD* (*Solution i1 o1 m n f x*) *i1*)) *x na*))
apply (*simp add*: *FBlock-def Solution-def*)
apply (*rule ref-eq*)
apply (*rule ndesign-refine-intro*, *simp*+)
apply (*rel-simp*)
apply (*rule-tac x* = (*SOME xx.* ∀ *n. xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*)) **in** *exI*)
apply (*rule-tac x* = λ*na. f-PreFD* (*SOME xx.* ∀ *n. xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*))
i1 inouts$_v$ *na* **in** *exI*, *simp*)
apply (*rule conjI*)
apply (*simp add*: *f-PreFD-def*)
using *i1-lt-m* **apply** *linarith*
apply (*rule-tac x* = λ*na.* (*f* (*f-PreFD* (*SOME xx.* ∀ *n. xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*))
i1 inouts$_v$) *na*) **in** *exI*, *simp*)
apply (*rule conjI*)
apply (*simp add*: *f-PreFD-def*)

apply (*rule conjI*)
using *i1-lt-m* **apply** *linarith*

defer
apply (*rule conjI*)
using *SimBlock-FBlock-fn s1* **apply** *blast*
apply (*rule allI*, *rule conjI*)

defer
defer
apply (*rule ndesign-refine-intro*, *simp+*)
apply (*rel-simp*)
apply (*rule conjI*)
defer
apply (*simp add*: *f-PreFD-def f-PostFD-def*)
using *o1-lt-n* **apply** *linarith*
prefer *3*
proof −
fix $inouts_v$::*nat* ⇒ *real list* **and** $inouts_v'$::*nat* ⇒ *real list* **and** *x*::*nat*
assume *a1*: ∀ *x*. *length*($inouts_v$ *x*) = *m* − *Suc 0* ∧
length($inouts_v'$ *x*) = *n* − *Suc 0* ∧
f-PostFD o1 (*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1* $inouts_v$) *n*!(*o1*)) *i1* $inouts_v$))
x = $inouts_v'$ *x*
let *?P*= λ*xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1* $inouts_v$) *n*!(*o1*)
have *1*: (*?P* (*SOME xx*. *?P xx*))
apply (*rule someI-ex*[*of ?P*])
using *s2* **apply** (*simp add*: *Solvable-unique-def*)
using *a1* **by** *blast*
show *f* (*f-PreFD* (*SOME xx*. *?P xx*) *i1* $inouts_v$) *x*!(*o1*) = (*SOME xx*. *?P xx*) *x*
by (*simp add*: *1*)
next
fix $inouts_v$ $inouts_v'$
assume *a1*: ∀ *x*. *length*($inouts_v$ *x*) = *m* − *Suc 0* ∧
length($inouts_v'$ *x*) = *n* − *Suc 0* ∧
f-PostFD o1 (*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1* $inouts_v$) *n*!(*o1*)) *i1* $inouts_v$))
x =
$inouts_v'$ *x*
assume *a2*: ∀ *x xa*. *length*(*x xa*) = *m* − *Suc 0* ⟶
length(*f-PostFD o1* (*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1 x*) *n*!(*o1*)) *i1 x*))
xa) =
n − *Suc 0*
from *a1* **have** *a1'*: ∀ *x*. *length*($inouts_v$ *x*) = *m* − *Suc 0*
by (*simp*)
have ∀ *na*. *length*((*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1* $inouts_v$) *n*!(*o1*)) *i1* $inouts_v$)
na) = *m*
using *a1' f-PreFD-def* **apply** (*simp*)
using *i1-lt-m* **by** *linarith*
then show ∀ *x*. *length*(*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1* $inouts_v$) *n*!(*o1*)) *i1*
$inouts_v$) *x*) = *n*
using *SimBlock-FBlock-fn s1* **by** *blast*
next
fix $inouts_v$ $inouts_v'$ *x*
assume *a1*: ∀ *x*. *length*($inouts_v$ *x*) = *m* − *Suc 0* ∧
length($inouts_v'$ *x*) = *n* − *Suc 0* ∧
f-PostFD o1 (*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1* $inouts_v$) *n*!(*o1*)) *i1* $inouts_v$))

$x =$
$inouts_v'\ x$
assume *a2*: $\forall\, x\ xa.\ length(x\ xa) = m - Suc\ 0 \longrightarrow$
$length(f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ x)\ n!(o1))\ i1\ x))\ xa) =$
$n - Suc\ 0$
from *a1* **have** *a1'*: $\forall\, x.\ length(inouts_v\ x) = m - Suc\ 0$
by (*simp*)
have $\forall\, na.\ length((f\text{-}PreFD\ (SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ inouts_v)\ n!(o1))\ i1\ inouts_v)\ na) = m$
using *a1' f-PreFD-def* **apply** (*simp*)
using *i1-lt-m* **by** *linarith*
then show $length(f\ (f\text{-}PreFD\ (SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ inouts_v)\ n!(o1))\ i1\ inouts_v)\ x) = n$
using *SimBlock-FBlock-fn s1* **by** *blast*
next
fix $inouts_v::nat \Rightarrow real\ list$ **and** $inouts_v'::nat \Rightarrow real\ list$ **and** $x::nat \Rightarrow real$ **and**
$inouts_v''::nat \Rightarrow real\ list$ **and** $inouts_v'''::nat \Rightarrow real\ list$
assume *a1*: $\forall\, xa.\ length(inouts_v\ xa) = m - Suc\ 0 \wedge inouts_v''\ xa = f\text{-}PreFD\ x\ i1\ inouts_v\ xa$
assume *a2*: $\forall\, xa.\ length(f\text{-}PreFD\ x\ i1\ inouts_v\ xa) = m \wedge f\ inouts_v''\ xa = inouts_v'''\ xa$
assume *a3*: $\forall\, xa.\ length(inouts_v'''\ xa) = n \wedge length(inouts_v'\ xa) = n - Suc\ 0 \wedge$
$inouts_v'\ xa = f\text{-}PostFD\ o1\ inouts_v'''\ xa \wedge inouts_v'''\ xa!(o1) = x\ xa$
have *unique-sol*:
$(\exists!\ (xx::nat \Rightarrow real).$
$(\forall\, n.\ (xx\ n = (f\ (\lambda n1.\ f\text{-}PreFD\ xx\ i1\ inouts_v\ n1)\ n)!o1)))$
using *s2 a1* **by** (*simp add*: *Solvable-unique-def*)
from *a1 a2* **have** $\forall\, xa.\ inouts_v'''\ xa = f\ inouts_v''\ xa$
by *simp*
then have $\forall\, xa.\ inouts_v'''\ xa = f\ (f\text{-}PreFD\ x\ i1\ inouts_v)\ xa$
using *a1* **by** *presburger*
then have *0*: $inouts_v''' = f\ (f\text{-}PreFD\ x\ i1\ inouts_v)$
by (*rule fun-eq*)
have *1*: $(SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ inouts_v)\ n!(o1)) = x$
apply (*rule some-equality*)
using *0 a3 unique-sol* **by** *auto*
then have *2*: $\forall\, n.\ f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ inouts_v)\ n!(o1))\ i1\ inouts_v))\ n$
$= f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ x\ i1\ inouts_v))\ n$
by *blast*
then have *3*: $\forall\, n.\ f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ inouts_v)\ n!(o1))\ i1\ inouts_v))\ n$
$= f\text{-}PostFD\ o1\ inouts_v'''\ n$
using *0* **by** *blast*
show $\forall\, x.\ length(f\text{-}PostFD\ o1\ inouts_v'''\ x) = n - Suc\ 0 \wedge$
$f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (SOME\ xx.\ \forall\, n.\ xx\ n = f\ (f\text{-}PreFD\ xx\ i1\ inouts_v)\ n!(o1))\ i1\ inouts_v))\ x$
$= f\text{-}PostFD\ o1\ inouts_v'''\ x$
apply (*rule allI*, *rule conjI*)
apply (*simp add*: *f-PostFD-def*)
using *a3 o1-lt-n* **apply** *auto*[*1*]
using *3* **by** *blast*
qed
show *?thesis*
using *1* **by** (*simp add*: *2*)
qed

lemma *unique-solution*:
assumes *s1*: *Solvable-unique i1 o1 m n* (*f*)
assumes *s2*: *is-Solution i1 o1 m n* (*f*) (*xx*)
assumes *s3*: $\forall\, n.$ *length*(*ins n*) = *m*−*1*
shows *xx ins* = (*Solution i1 o1 m n f ins*)
using *s1 s2* **apply** (*simp add*: *Solution-def Solvable-unique-def is-Solution-def*)
apply (*clarify*)
proof −
assume *a1*: $\forall\, inouts_0.$ ($\forall\, x.$ *length*($inouts_0$ *x*) = *m* − *Suc 0*) ⟶
($\forall\, n.$ *xx* $inouts_0$ *n* = *f* (*f-PreFD* (*xx* $inouts_0$) *i1* $inouts_0$) *n*!(*o1*))
assume *a2*: $\forall\, inouts_0.$ ($\forall\, x.$ *length*($inouts_0$ *x*) = *m* − *Suc 0*) ⟶
($\exists!xx.\ \forall\, n.$ *xx n* = *f* (*f-PreFD xx i1* $inouts_0$) *n*!(*o1*))
have (*SOME xx*. $\forall\, n.$ *xx n* = *f* (*f-PreFD xx i1 ins*) *n*!(*o1*)) = *xx ins*
apply (*rule some-equality*)
using *a1 s3* **apply** *simp*
using *a2* **apply** (*simp add*: *Ex1-def*)
proof −
fix *xxa*
assume *a3*: $\forall\, n.$ *xxa n* = *f* (*f-PreFD xxa i1 ins*) *n*!(*o1*)
assume *a4*: $\forall\, inouts_0.$
($\forall\, x.$ *length*($inouts_0$ *x*) = *m* − *Suc 0*) ⟶
($\exists\, x.$ ($\forall\, n.$ *x n* = *f* (*f-PreFD x i1* $inouts_0$) *n*!(*o1*)) ∧
($\forall\, y.$ ($\forall\, n.$ *y n* = *f* (*f-PreFD y i1* $inouts_0$) *n*!(*o1*)) ⟶ *y* = *x*))
from *a4 s3* **have** *1*: ($\exists\, x.$ ($\forall\, n.$ *x n* = *f* (*f-PreFD x i1 ins*) *n*!(*o1*)) ∧
($\forall\, y.$ ($\forall\, n.$ *y n* = *f* (*f-PreFD y i1 ins*) *n*!(*o1*)) ⟶ *y* = *x*))
by *simp*
from *s2* **have** *2*: $\forall\, n.$ (*xx ins*) *n* = *f* (*f-PreFD* (*xx ins*) *i1 ins*) *n*!(*o1*)
using *a1 s3* **by** *simp*
show *xxa* = *xx ins*
using *a3 a4 s3 1 2* **by** *blast*
qed
then show *xx ins* = (*SOME xx*. $\forall\, n.$ *xx n* = *f* (*f-PreFD xx i1 ins*) *n*!(*o1*))
by *simp*
qed

lemma *FBlock-feedback'*:
assumes *s1*: *SimBlock m n* (*FBlock* (λ*x n*. *True*) *m n f*)
assumes *s2*: *Solvable-unique i1 o1 m n* (*f*)
assumes *s3*: *is-Solution i1 o1 m n* (*f*) (*xx*)
shows (*FBlock* (λ*x n*. *True*) *m n f*) f_D (*i1*, *o1*)
= (*FBlock* (λ*x n*. *True*) (*m*−*1*) (*n*−*1*)
(λ*x na*. ((*f-PostFD o1*) *o f o* (*f-PreFD* (*xx x*) *i1*)) *x na*))
using *s1 s2 FBlock-feedback* **apply** (*simp*)
proof −
have *i1-lt-m*: *i1* < *m*
using *s2* **by** (*simp add*: *Solvable-unique-def*)
have *o1-lt-n*: *o1* < *n*
using *s2* **by** (*simp add*: *Solvable-unique-def*)
show *FBlock* (λ*x n*. *True*) (*m* − *Suc 0*) (*n* − *Suc 0*)
(λ*x*. *f-PostFD o1* (*f* (*f-PreFD* (*Solution i1 o1 m n f x*) *i1 x*))) =
FBlock (λ*x n*. *True*) (*m* − *Suc 0*) (*n* − *Suc 0*) (λ*x*. *f-PostFD o1* (*f* (*f-PreFD* (*xx x*) *i1 x*)))
apply (*simp* (*no-asm*) *add*: *FBlock-def*)
apply (*rel-simp*)
apply (*rule iffI*, *clarify*)

defer
apply (*clarify*)
defer
proof −
fix ok_v $inouts_v$ ok_v' $inouts_v'$
assume *a1*: $\forall x.\ length(inouts_v\ x) = m - Suc\ 0 \wedge$
$length(inouts_v'\ x) = n - Suc\ 0 \wedge$
$f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (Solution\ i1\ o1\ m\ n\ f\ inouts_v)\ i1\ inouts_v))\ x = inouts_v'\ x$
assume *a2*: $\forall x\ xa.\ length(x\ xa) = m - Suc\ 0 \longrightarrow$
$length(f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (Solution\ i1\ o1\ m\ n\ f\ x)\ i1\ x))\ xa) = n - Suc\ 0$
have *1*: $\forall x.\ length(inouts_v\ x) = m - Suc\ 0$
using *a1* **by** *simp*
have *2*: $xx\ inouts_v = (Solution\ i1\ o1\ m\ n\ f\ inouts_v)$
apply (*rule unique-solution*)
using *s2* **apply** (*simp*)
using *s3* **apply** (*simp*)
using *1* **by** (*simp*)
show $(\forall x.\ length(inouts_v\ x) = m - Suc\ 0 \wedge length(inouts_v'\ x) = n - Suc\ 0 \wedge$
$f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (xx\ inouts_v)\ i1\ inouts_v))\ x = inouts_v'\ x) \wedge$
$(\forall x\ xa.\ length(x\ xa) = m - Suc\ 0 \longrightarrow length(f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (xx\ x)\ i1\ x))\ xa) = n - Suc\ 0)$
apply (*rule conjI*)
using *2 a1* **apply** *simp*
apply (*rule allI*)
apply (*clarify*)
proof −
fix x::$nat \Rightarrow real\ list$ **and** xa::nat
assume *a11*: $length\ (x\ xa) = m - Suc\ 0$
have *1*: $length((f\text{-}PreFD\ (xx\ x)\ i1\ x)\ xa) = m$
using *a11* **apply** (*simp add*: *f-PreFD-def*)
using *i1-lt-m* **by** *linarith*
have *2*: $length((f\ (f\text{-}PreFD\ (xx\ x)\ i1\ x))\ xa) = n$
using *1 SimBlock-FBlock-fn s1* **by** *blast*
show $length(f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (xx\ x)\ i1\ x))\ xa) = n - Suc\ 0$
apply (*simp add*: *f-PostFD-def f-PreFD-def*)
using *1 2 o1-lt-n* **by** *linarith*
qed
next
fix ok_v $inouts_v$ ok_v' $inouts_v'$
assume *a1*: $\forall x.\ length(inouts_v\ x) = m - Suc\ 0 \wedge length(inouts_v'\ x) = n - Suc\ 0 \wedge$
$f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (xx\ inouts_v)\ i1\ inouts_v))\ x = inouts_v'\ x$
assume *a2*: $\forall x\ xa.\ length(x\ xa) = m - Suc\ 0 \longrightarrow length(f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (xx\ x)\ i1\ x))\ xa) = n - Suc\ 0$
have *1*: $\forall x.\ length(inouts_v\ x) = m - Suc\ 0$
using *a1* **by** *simp*
have *2*: $xx\ inouts_v = (Solution\ i1\ o1\ m\ n\ f\ inouts_v)$
apply (*rule unique-solution*)
using *s2* **apply** (*simp*)
using *s3* **apply** (*simp*)
using *1* **by** (*simp*)
show $(\forall x.\ length(inouts_v\ x) = m - Suc\ 0 \wedge\ length(inouts_v'\ x) = n - Suc\ 0 \wedge$
$f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (Solution\ i1\ o1\ m\ n\ f\ inouts_v)\ i1\ inouts_v))\ x = inouts_v'\ x) \wedge$
$(\forall x\ xa.\ length(x\ xa) = m - Suc\ 0 \longrightarrow$
$length(f\text{-}PostFD\ o1\ (f\ (f\text{-}PreFD\ (Solution\ i1\ o1\ m\ n\ f\ x)\ i1\ x))\ xa) = n - Suc\ 0)$
apply (*rule conjI*)

```
        using 2 a1 apply auto[1]
        apply (rule allI)
        apply (clarify)
        proof −
          fix x::nat ⇒ real list and xa::nat
          assume a11: length (x xa) = m − Suc 0
          have 1: length((f-PreFD (Solution i1 o1 m n f x) i1 x) xa) = m
            using a11 apply (simp add: f-PreFD-def)
            using i1-lt-m by linarith
          have 2: length((f (f-PreFD (Solution i1 o1 m n f x) i1 x)) xa) = n
            using 1 SimBlock-FBlock-fn s1 by blast
          show length(f-PostFD o1 (f (f-PreFD (Solution i1 o1 m n f x) i1 x)) xa) = n − Suc 0
            apply (simp add: f-PostFD-def f-PreFD-def)
            using 1 2 o1-lt-n by linarith
        qed
      qed
    qed

lemma FBlock-feedback-ref:
    assumes s1: SimBlock m n (FBlock (λx n. True) m n f)
    assumes s2: Solvable i1 o1 m n (f)
    shows (FBlock (λx n. True) m n f) f_D (i1, o1)
        ⊑ (FBlock (λx n. True) (m−1) (n−1)
            (λx na. ((f-PostFD o1) o f o (f-PreFD (Solution i1 o1 m n f x) i1)) x na))
    proof −
      have inps-1: inps (FBlock (λx n. True) m n f) = m
        using s1 by (simp add: inps-P)
      have outps-1: outps (FBlock (λx n. True) m n f) = n
        using s1 by (simp add: outps-P)
      have i1-lt-m: i1 < m
        using s2 by (simp add: Solvable-def)
      have o1-lt-n: o1 < n
        using s2 by (simp add: Solvable-def)
      have 1: (FBlock (λx n. True) m n f) f_D (i1, o1) = (true ⊢_n (∃ x ·
            (∀ n · #_u($inouts(«n»)_a) =_u «m − Suc 0» ∧
                  #_u($inouts´(«n»)_a) =_u «m» ∧ $inouts´(«n»)_a =_u «f-PreFD x i1»($inouts)_a(«n»)_a)
; ;
            ((∀ na · #_u($inouts(«na»)_a) =_u «m» ∧
                   #_u($inouts´(«na»)_a) =_u «n» ∧ «f»($inouts)_a(«na»)_a =_u $inouts´(«na»)_a) ∧
             (∀ x · ∀ na · #_u(«x na») =_u «m» ⇒ #_u(«f x na») =_u «n»)) ; ;
            (∀ na · #_u($inouts(«na»)_a) =_u «n» ∧
                  #_u($inouts´(«na»)_a) =_u «n − Suc 0» ∧
                  $inouts´(«na»)_a =_u «f-PostFD o1»($inouts)_a(«na»)_a ∧
                  «uapply»($inouts(«na»)_a)_a(«o1»)_a =_u «x na»)))
      apply (simp add: inps-1 outps-1)
      apply (simp add: PreFD-def PostFD-def FBlock-def Solution-def)
      apply (simp add: ndesign-composition-wp wp-upred-def)
      by (rel-simp)
    have 2: (true ⊢_n (∃ x ·
            (∀ n · #_u($inouts(«n»)_a) =_u «m − Suc 0» ∧
                  #_u($inouts´(«n»)_a) =_u «m» ∧ $inouts´(«n»)_a =_u «f-PreFD x i1»($inouts)_a(«n»)_a)
; ;
            ((∀ na · #_u($inouts(«na»)_a) =_u «m» ∧
                   #_u($inouts´(«na»)_a) =_u «n» ∧ «f»($inouts)_a(«na»)_a =_u $inouts´(«na»)_a) ∧
             (∀ x · ∀ na · #_u(«x na») =_u «m» ⇒ #_u(«f x na») =_u «n»)) ; ;
```

```
        (∀ na · #u($inouts(«na»)a) =u «n» ∧
                #u($inouts´(«na»)a) =u «n − Suc 0» ∧
                $inouts´(«na»)a =u «f-PostFD o1»($inouts)a(«na»)a ∧
                «uapply»($inouts(«na»)a)a(«o1»)a =u «x na»)))
    ⊑ (FBlock (λx n. True) (m−1) (n−1)
        (λx na. ((f-PostFD o1) o f o (f-PreFD (Solution i1 o1 m n f x) i1)) x na))
    apply (simp add: FBlock-def Solution-def)
    apply (rule ndesign-refine-intro, simp+)
    apply (rel-simp)
    apply (rule-tac x = (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1)) in exI)
    apply (rule-tac x = λna. f-PreFD (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1))
                                i1 inoutsv na in exI, simp)
    apply (rule conjI)
    apply (simp add: f-PreFD-def)
    using i1-lt-m apply linarith
    apply (rule-tac x = λna. (f (f-PreFD (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1))
                                    i1 inoutsv) na) in exI, simp)
    apply (rule conjI)
    apply (simp add: f-PreFD-def)
    apply (rule conjI)
    using i1-lt-m apply linarith

    defer
    apply (rule conjI)
    using SimBlock-FBlock-fn s1 apply blast
    apply (rule allI, rule conjI)

    defer
    proof −
      fix inoutsv::nat ⇒ real list and inoutsv'::nat ⇒ real list and x::nat
      assume a1: ∀ x. length(inoutsv x) = m − Suc 0 ∧
        length(inoutsv' x) = n − Suc 0 ∧
       f-PostFD o1 (f (f-PreFD (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1)) i1 inoutsv))
x = inoutsv' x
      let ?P= λxx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1)
      have 1: (?P (SOME xx. ?P xx))
        apply (rule someI-ex[of ?P])
        using s2 apply (simp add: Solvable-def)
        using a1 by blast
      show f (f-PreFD (SOME xx. ?P xx) i1 inoutsv) x!(o1) = (SOME xx. ?P xx) x
        by (simp add: 1)
    next
      fix inoutsv inoutsv'
      assume a1: ∀ x. length(inoutsv x) = m − Suc 0 ∧
        length(inoutsv' x) = n − Suc 0 ∧
       f-PostFD o1 (f (f-PreFD (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1)) i1 inoutsv))
x =
        inoutsv' x
      assume a2: ∀ x xa. length(x xa) = m − Suc 0 ⟶
          length(f-PostFD o1 (f (f-PreFD (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 x) n!(o1)) i1 x))
xa) =
          n − Suc 0
      from a1 have a1': ∀ x. length(inoutsv x) = m − Suc 0
        by (simp)
     have ∀ na. length((f-PreFD (SOME xx. ∀ n. xx n = f (f-PreFD xx i1 inoutsv) n!(o1)) i1 inoutsv)
```

na) = *m*
using *a1' f-PreFD-def* **apply** (*simp*)
using *i1-lt-m* **by** *linarith*
then show ∀ *x*. *length*(*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*)) *i1* *inouts*$_v$) *x*) = *n*
using *SimBlock-FBlock-fn s1* **by** *blast*
next
fix *inouts*$_v$ *inouts*$_v$' *x*
assume *a1*: ∀ *x*. *length*(*inouts*$_v$ *x*) = *m* − *Suc 0* ∧
length(*inouts*$_v$' *x*) = *n* − *Suc 0* ∧
f-PostFD o1 (*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*)) *i1 inouts*$_v$)) *x* =
inouts$_v$' *x*
assume *a2*: ∀ *x xa*. *length*(*x xa*) = *m* − *Suc 0* ⟶
length(*f-PostFD o1* (*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1 x*) *n*!(*o1*)) *i1 x*)) *xa*) =
n − *Suc 0*
from *a1* **have** *a1'*: ∀ *x*. *length*(*inouts*$_v$ *x*) = *m* − *Suc 0*
by (*simp*)
have ∀ *na*. *length*((*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*)) *i1 inouts*$_v$) *na*) = *m*
using *a1' f-PreFD-def* **apply** (*simp*)
using *i1-lt-m* **by** *linarith*
then show *length*(*f* (*f-PreFD* (*SOME xx*. ∀ *n*. *xx n* = *f* (*f-PreFD xx i1 inouts*$_v$) *n*!(*o1*)) *i1* *inouts*$_v$) *x*) = *n*
using *SimBlock-FBlock-fn s1* **by** *blast*
qed
show *?thesis*
by (*metis 1 2*)
qed

lemma *SimBlock-FBlock-feedback* [*simblock-healthy*]:
assumes *s1*: *SimBlock m n* (*FBlock* (λ*x n*. *True*) *m n f*)
assumes *s2*: *Solvable i1 o1 m n* (*f*)
shows *SimBlock* (*m*−*1*) (*n*−*1*) ((*FBlock* (λ*x n*. *True*) *m n f*) *f*$_D$ (*i1*, *o1*))
proof −
have *m1-ge-0*: (*m* − (*Suc 0*)) ≥ *0*
using *s2* **by** (*simp add*: *Solvable-def*)
have *m1-gt-0*: *m* > *0*
using *s2* **by** (*simp add*: *Solvable-def*)
have *inps-1*: *inps* (*FBlock* (λ*x n*. *True*) *m n f*) = *m*
using *inps-outps s1* **by** *blast*
have *outps-1*: *outps* (*FBlock* (λ*x n*. *True*) *m n f*) = *n*
using *inps-outps s1* **by** *blast*
have *i1-le-m*: *i1* ≤ *m* − *Suc 0*
using *s2* **apply** (*simp add*: *Solvable-def*)
by *linarith*
have *o1-le-n*: *o1* ≤ *n* − *Suc 0*
using *s2* **apply** (*simp add*: *Solvable-def*)
by *linarith*
obtain *inouts*$_0$::*nat* ⇒ *real list* **where** *P0*: ∀ *x*. *length*(*inouts*$_0$ *x*) = (*m* − *1*)
using *m1-gt-0 list-len-avail*
by *blast*
have (∀ *inouts*$_0$. (∀ *x*. *length*(*inouts*$_0$ *x*) = (*m*−*1*))
⟶ (∃ *xx*.

```
        (∀ n. (xx n =
              (f (λn1.
                  ((take i1 (inouts_0 n1))•(xx n1)#(drop i1 (inouts_0 n1)))
                 ) n)!o1
              )
        )))
      using s2 by (simp add: Solvable-def f-PreFD-def)
    then have 1: ∃ xx. (∀ n. (xx n = (f (λn1. ((take i1 (inouts_0 n1))•(xx n1)#(drop i1 (inouts_0 n1))))
n)!o1))
      apply (simp)
      using P0 by simp
    obtain xx::nat ⇒ real
    where P1: (∀ n. (xx n = (f (λn1. ((take i1 (inouts_0 n1))•(xx n1)#(drop i1 (inouts_0 n1)))) n)!o1
          ))
      using 1 P0 by blast
    have 2: Suc (m − Suc 0) = m
      using m1-gt-0 by simp
    show ?thesis
      apply (simp add: SimBlock-def inps-1 outps-1 PreFD-def PostFD-def)
      apply (simp add: FBlock-def)
      apply (rel-auto)
      apply (simp add: f-blocks)

      apply (rule-tac x = inouts_0 in exI)
      apply (rule-tac x = λna.
         (remove-at (f (λn1. ((take i1 (inouts_0 n1))•[xx n1]•(drop i1 (inouts_0 n1)))) na) o1) in exI)
      apply (rule-tac x = xx in exI)
      apply (rule-tac x = True in exI, simp)
      apply (rule-tac x = λna. (
         (λn1. ((take i1 (inouts_0 n1))•[xx n1]•(drop i1 (inouts_0 n1)))) na) in exI)
      apply (simp)
      apply (rule conjI)
      apply (rule allI)
      apply (rule conjI)
      using P0 apply (simp)
      apply (simp add: 2 P0)
      apply (rule-tac x = True in exI, simp)
      apply (rule-tac x = λna.
         ((f (λn1. ((take i1 (inouts_0 n1))•[xx n1]•(drop i1 (inouts_0 n1)))) na)) in exI)
      apply (simp)
      apply (rule conjI)
      using 2 P0 SimBlock-FBlock-fn s1
      apply (smt One-nat-def add-Suc-right append-take-drop-id length-Cons length-append)
      apply (rule conjI)
      using SimBlock-FBlock-fn s1 apply blast
      apply (rule allI)
      apply (rule conjI)
      using SimBlock-FBlock-fn s1
      apply (smt 2 One-nat-def P0 add-Suc-right append-take-drop-id length-Cons length-append)
      apply (rule conjI)
      defer
      using P1 apply metis
      proof −
        fix x
        have 1: length(f (λn1. take i1 (inouts_0 n1) • xx n1 # drop i1 (inouts_0 n1)) x) = n
```

using *2 P0 SimBlock-FBlock-fn s1*
by (*smt One-nat-def add-Suc-right append-take-drop-id length-Cons length-append*)
show *min* (*length*(*f* (λ*n1*. *take i1* (*inouts*$_0$ *n1*) • *xx n1* # *drop i1* (*inouts*$_0$ *n1*)) *x*)) *o1* +
(*length*(*f* (λ*n1*. *take i1* (*inouts*$_0$ *n1*) • *xx n1* # *drop i1* (*inouts*$_0$ *n1*)) *x*) − *Suc o1*) =
n − *Suc 0*
apply (*simp add*: *1*)
using *o1-le-n* **by** *linarith*
qed
qed

B.4.5 Split

lemma *SimBlock-Split2* [*simblock-healthy*]:
SimBlock 1 2 (*Split2*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac x* = λ*na*. [*1*] **in** *exI*)
apply *force*
by (*simp add*: *f-blocks*)

B.5 Blocks

B.5.1 Source

B.5.1.1 Const

lemma *SimBlock-Const* [*simblock-healthy*]:
SimBlock 0 1 (*Const c0*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac x* = λ*na*. [] **in** *exI*)
apply *force*
by (*simp add*: *f-blocks*)

B.5.1.2 Pulse Generator

B.5.2 Unit Delay

lemma *SimBlock-UnitDelay* [*simblock-healthy*]:
SimBlock 1 1 (*UnitDelay x0*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac x* = λ*na*. [*1*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*if na* = *0 then x0 else 1*] **in** *exI*)
apply (*simp*)
by (*simp add*: *f-blocks*)

B.5.3 Discrete-Time Integrator

B.5.4 Sum

lemma *SimBlock-Sum2* [*simblock-healthy*]:
SimBlock 2 1 (*Sum2*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)

apply (*rule-tac* $x = \lambda na.\ [1,1]$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ [2]$ **in** *exI*)
apply (*simp*)
by (*simp add*: *f-blocks*)

B.5.5 Product

lemma *SimBlock-Mul2* [*simblock-healthy*]:
SimBlock 2 1 (*Mul2*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.\ [1,1]$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ [1]$ **in** *exI*)
apply (*simp*)
by (*simp add*: *f-blocks*)

lemma *SimBlock-Div2* [*simblock-healthy*]:
SimBlock 2 1 (*Div2*)
apply (*simp add*: *f-sim-blocks*)
apply (*simp add*: *SimBlock-def FBlock-def*)
apply (*rel-auto*)
apply (*rule-tac* $x = \lambda na.\ [1,1]$ **in** *exI*)
apply (*simp*)
apply (*rule conjI*)
apply (*rule-tac* $x = \lambda na.\ [1]$ **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

B.5.6 Gain

lemma *SimBlock-Gain* [*simblock-healthy*]:
SimBlock 1 1 (*Gain k*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.\ [1]$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ [k]$ **in** *exI*)
apply (*simp*)
by (*simp add*: *f-blocks*)

B.5.7 Saturation

lemma *SimBlock-Limit* [*simblock-healthy*]:
assumes $ymin \leq ymax$
shows *SimBlock 1 1* (*Limit ymin ymax*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.\ [ymin]$ **in** *exI*)
apply (*rule-tac* $x = \lambda na.\ [ymin]$ **in** *exI*)
using *assms* **apply** (*simp*)
by (*simp add*: *f-blocks*)

B.5.8 MinMax

lemma *SimBlock-Min2* [*simblock-healthy*]:
shows *SimBlock 2 1* (*Min2*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.$ [*1*,*2*] **in** *exI*)
apply (*rule-tac* $x = \lambda na.$ [*1*] **in** *exI*)
apply (*simp*)
by (*simp add*: *f-blocks*)

lemma *SimBlock-Max2* [*simblock-healthy*]:
shows *SimBlock 2 1* (*Max2*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.$ [*1*,*2*] **in** *exI*)
apply (*rule-tac* $x = \lambda na.$ [*2*] **in** *exI*)
apply (*simp*)
by (*simp add*: *f-blocks*)

B.5.9 Rounding

lemma *SimBlock-RoundFloor* [*simblock-healthy*]:
shows *SimBlock 1 1* (*RoundFloor*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.$ [*1*] **in** *exI*)
apply (*rule-tac* $x = \lambda na.$ [*1*] **in** *exI*)
apply *auto*[*1*]
by (*simp add*: *f-blocks*)

lemma *SimBlock-RoundCeil* [*simblock-healthy*]:
shows *SimBlock 1 1* (*RoundCeil*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac* $x = \lambda na.$ [*1*] **in** *exI*)
apply (*rule-tac* $x = \lambda na.$ [*1*] **in** *exI*)
apply *auto*[*1*]
by (*simp add*: *f-blocks*)

B.5.10 Combinatorial Logic

B.5.11 Logic Operators

B.5.11.1 AND

lemma *LAnd* [*1*,*1*] = *True*
by *auto*

lemma *LAnd* [*1*,*1*,*0*] = *False*
by *auto*

lemma *LAnd-and-not*: *LAnd* [*a*,*b*] = ($a \neq 0 \wedge b \neq 0$)
by (*simp*)

lemma *LAnd-not-or*: *LAnd* [*a*,*b*] = (¬ (*a* = *0* ∨ *b* = *0*))
by (*simp*)

lemma *SimBlock-LopAND* [*simblock-healthy*]:
assumes *s1*: *m* > *0*
shows *SimBlock m 1* (*LopAND m*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
proof −
obtain $inouts_v$::*nat* ⇒ *real list*
where *P*: ∀ *na*. *length*($inouts_v$ *na*) = *m* ∧ (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *0*))
using *list-len-avail'* **by** *fastforce*
have *1*: (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *0*))
using *P* **by** *blast*
have *2*: *length*($inouts_v$ *na*) = *m*
using *P* **by** *blast*
from *1 2* **have** *3*: (*LAnd* ($inouts_v$ *x*) = *False*)
using *P s1* **by** (*metis LAnd.simps*(*2*) *hd-Cons-tl length-0-conv neq0-conv nth-Cons-0*)
show ∃ $inouts_v$ $inouts_v'$.
∀ *x*. *length*($inouts_v'$ *x*) = *Suc 0* ∧ *length*($inouts_v$ *x*) = *m* ∧ *f-LopAND* $inouts_v$ *x* = $inouts_v'$ *x*
apply (*rule-tac x* = $inouts_v$ **in** *exI*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
using *P 3*
by (*metis* (*full-types*) *LAnd.simps*(*2*) *hd-Cons-tl length-0-conv length-Cons nth-Cons-0 s1*)
next
show ∀ *x na*. *length*(*x na*) = *m* ⟶ *length*(*f-LopAND x na*) = *Suc 0*
by (*simp add*: *f-blocks*)
qed

B.5.11.2 OR

lemma *LOr* [*0*,*0*] = *False*
by *auto*

lemma *LOr* [*0*,*1*,*0*] = *True*
by *auto*

lemma *SimBlock-LopOR* [*simblock-healthy*]:
assumes *s1*: *m* > *0*
shows *SimBlock m 1* (*LopOR m*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
proof −
obtain $inouts_v$::*nat* ⇒ *real list*
where *P*: ∀ *na*. *length*($inouts_v$ *na*) = *m* ∧ (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *1*))
using *list-len-avail'* **by** *fastforce*
have *1*: (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *1*))
using *P* **by** *blast*
have *2*: *length*($inouts_v$ *na*) = *m*
using *P* **by** *blast*
from *1 2* **have** *3*: (*LOr* ($inouts_v$ *x*) = *True*)
using *P s1*
by (*metis LOr.elims*(*3*) *length-0-conv neq0-conv nth-Cons-0 zero-neq-one*)
show ∃ $inouts_v$ $inouts_v'$.
∀ *x*. *length*($inouts_v'$ *x*) = *Suc 0* ∧ *length*($inouts_v$ *x*) = *m* ∧ *f-LopOR* $inouts_v$ *x* = $inouts_v'$ *x*
apply (*rule-tac x* = $inouts_v$ **in** *exI*)

apply (*simp add*: *f-blocks*)
apply (*rule-tac x* = λ*na*. [*1*] **in** *exI*)
using *P 3*
by (*metis* (*full-types*) *LOr.simps*(*2*) *hd-Cons-tl length-0-conv length-Cons nth-Cons-0 s1*)
next
show ∀ *x na*. *length*(*x na*) = *m* ⟶ *length*(*f-LopOR x na*) = *Suc 0*
by (*simp add*: *f-blocks*)
qed

B.5.11.3 NAND

lemma *LNand* [*1*,*1*] = *False*
by *auto*

lemma *LNand* [*1*,*1*,*0*] = *True*
by *auto*

lemma *SimBlock-LopNAND* [*simblock-healthy*]:
assumes *s1*: *m* > *0*
shows *SimBlock m 1* (*LopNAND m*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
proof −
obtain $inouts_v$::*nat* ⇒ *real list*
where *P*: ∀ *na*. *length*($inouts_v$ *na*) = *m* ∧ (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *0*))
using *list-len-avail'* **by** *fastforce*
have *1*: (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *0*))
using *P* **by** *blast*
have *2*: *length*($inouts_v$ *na*) = *m*
using *P* **by** *blast*
from *1 2* **have** *3*: (*LNand* ($inouts_v$ *x*) = *True*)
using *P s1*
by (*metis LNand.elims*(*3*) *length-0-conv neq0-conv nth-Cons-0*)
show ∃ $inouts_v$ $inouts_v'$.
∀ *x*. *length*($inouts_v'$ *x*) = *Suc 0* ∧ *length*($inouts_v$ *x*) = *m* ∧ *f-LopNAND* $inouts_v$ *x* = $inouts_v'$ *x*
apply (*rule-tac x* = $inouts_v$ **in** *exI*)
apply (*simp add*: *f-blocks*)
apply (*rule-tac x* = λ*na*. [*1*] **in** *exI*)
using *P 3*
by (*metis* (*full-types*) *LNand.simps*(*2*) *hd-Cons-tl length-0-conv length-Cons nth-Cons-0 s1*)
next
show ∀ *x na*. *length*(*x na*) = *m* ⟶ *length*(*f-LopNAND x na*) = *Suc 0*
by (*simp add*: *f-blocks*)
qed

B.5.11.4 NOR

lemma *LNor* [*1*,*0*] = *False*
by *auto*

lemma *LNor* [*0*,*0*,*0*] = *True*
by *auto*

B.5.11.5 XOR

lemma *LXor* [*1*,*0*] *0* = *True*
by *auto*

lemma *LXor* [*1*,*0*,*1*] *0* = *False*
by *auto*

B.5.11.6 NXOR **lemma** *LNxor [1,0] 0 = False*
by *auto*

lemma *LNxor [1,0,1] 0 = True*
by *auto*

B.5.11.7 NOT **lemma** *SimBlock-LopNOT [simblock-healthy]*:
shows *SimBlock 1 1 (LopNOT)*
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x = λna. [0] in exI*)
apply (*rule-tac x = λna. [1] in exI*)
apply (*simp add*: *f-LopNOT-def*)
by (*simp add*: *f-blocks*)

B.5.12 Relational Operator

B.5.12.1 Equal == **lemma** *SimBlock-RopEQ [simblock-healthy]*:
shows *SimBlock 2 1 (RopEQ)*
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x = λna. [0,0] in exI*)
apply (*rule-tac x = λna. [1] in exI*)
apply (*simp add*: *f-RopEQ-def*)
by (*simp add*: *f-blocks*)

B.5.12.2 Notequal = **lemma** *SimBlock-RopNEQ [simblock-healthy]*:
shows *SimBlock 2 1 (RopNEQ)*
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x = λna. [0,0] in exI*)
apply (*rule-tac x = λna. [0] in exI*)
apply (*simp add*: *f-RopNEQ-def*)
by (*simp add*: *f-blocks*)

B.5.12.3 Less Than < **lemma** *SimBlock-RopLT [simblock-healthy]*:
shows *SimBlock 2 1 (RopLT)*
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x = λna. [0,0] in exI*)
apply (*rule-tac x = λna. [0] in exI*)
apply (*simp add*: *f-RopLT-def*)
by (*simp add*: *f-blocks*)

B.5.12.4 Less Than or Equal to <= **lemma** *SimBlock-RopLE [simblock-healthy]*:
shows *SimBlock 2 1 (RopLE)*
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x = λna. [0,0] in exI*)
apply (*rule-tac x = λna. [1] in exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

B.5.12.5 Greater Than > **lemma** *SimBlock-RopGT [simblock-healthy]*:
shows *SimBlock 2 1 (RopGT)*

apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*0*,*0*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

B.5.12.6 Greater Than or Equal to >= **lemma** *SimBlock-RopGE* [*simblock-healthy*]:

shows *SimBlock 2 1* (*RopGE*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*0*,*0*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*1*] **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

B.5.13 Switch

lemma *SimBlock-Switch1* [*simblock-healthy*]:
shows *SimBlock 3 1* (*Switch1 th*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*0*,*th*,*1*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

lemma *SimBlock-Switch2* [*simblock-healthy*]:
shows *SimBlock 3 1* (*Switch2 th*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*0*,*th*+*1*,*1*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

lemma *SimBlock-Switch3* [*simblock-healthy*]:
shows *SimBlock 3 1* (*Switch3*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*0*,*1*,*1*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

B.5.14 Merge

B.5.15 Subsystem

B.5.16 Enabled Subsystem

B.5.17 Triggered Subsystem

B.5.18 Enabled and Triggered Subsystem

B.5.19 Data Type Conversion

lemma *SimBlock-DataTypeConvUint32Zero* [*simblock-healthy*]:
shows *SimBlock 1 1* (*DataTypeConvUint32Zero*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*3294967295.5*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*3294967295*] **in** *exI*)
apply (*simp add*: *f-blocks RoundZero-def uint32-def*)
by (*simp add*: *f-blocks*)

lemma *SimBlock-DataTypeConvInt32Zero* [*simblock-healthy*]:
shows *SimBlock 1 1* (*DataTypeConvInt32Zero*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [−*4.5*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [−*4*] **in** *exI*)
apply (*simp add*: *f-blocks RoundZero-def int32-def*)
by (*simp add*: *f-blocks*)

B.5.20 Initial Condition (IC)

lemma *SimBlock-IC* [*simblock-healthy*]:
shows *SimBlock 1 1* (*IC x0*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*x0*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*x0*] **in** *exI*)
apply (*simp add*: *f-blocks*)
by (*simp add*: *f-blocks*)

B.5.21 Router Block

lemma *assembleOutput-len*:
∀ *x na*. *length*(*assembleOutput* (*x na*) *routes*) = *length*(*routes*)
apply (*auto*)
proof (*induction routes*)
case *Nil*
then show *?case*
by *simp*
next
case (*Cons a routes*)
then show *?case*
by (*simp*)
qed

lemma *SimBlock-Router* [*simblock-healthy*]:
assumes *s1*: *length*(*routes*) = *m*

shows *SimBlock m m* (*Router m routes*)
apply (*simp add*: *f-sim-blocks*)
apply (*rule SimBlock-FBlock*)
proof −
obtain $inouts_v$::*nat* ⇒ *real list*
where *P*: ∀ *na*. *length*($inouts_v$ *na*) = *m* ∧ (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *0*))
using *list-len-avail'* **by** *fastforce*
have *1*: (∀ *x*<*m*. (($inouts_v$ *na*)!*x* = *0*))
using *P* **by** *blast*
have *2*: *length*($inouts_v$ *na*) = *m*
using *P* **by** *blast*
have *3*: ∀ *x*. *length*(*assembleOutput* ($inouts_v$ *x*) *routes*) = *length*(*routes*)
by (*simp add*: *assembleOutput-len*)
then have *4*: ∀ *x*. *length*(*assembleOutput* ($inouts_v$ *x*) *routes*) = *m*
using *s1* **by** *simp*
show ∃ $inouts_v$ $inouts_v'$.
∀ *x*. *length*($inouts_v'$ *x*) = *m* ∧ *length*($inouts_v$ *x*) = *m* ∧ *f-Router routes* $inouts_v$ *x* = $inouts_v'$ *x*
apply (*rule-tac x* = $inouts_v$ **in** *exI*)
apply (*rule-tac x* = *f-Router routes* $inouts_v$ **in** *exI*)
apply (*simp add*: *f-blocks*)
using *4 s1*
by (*simp add*: *P*)
next
show ∀ *x na*. *length*(*x na*) = *m* ⟶ *length*(*f-Router routes x na*) = *m*
apply (*simp add*: *f-blocks*)
using *s1* **by** (*simp add*: *assembleOutput-len*)
qed

B.6 Frequently Used Composition of Blocks

lemma *UnitDelay-Id-parallel-comp*:
(*UnitDelay 0* $\|_B$ *Id*) = (*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n* = *0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))]))
proof −
have *f1*: (*UnitDelay 0* $\|_B$ *Id*) = (*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. ((((*f-UnitDelay 0*) ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*)
• ((*f-Id* ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*)))
using *SimBlock-UnitDelay SimBlock-Id* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *numeral-2-eq-2*)
then have *f1-0*: ... = (*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n* = *0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))]))
proof −
have ∀ (*f*::*nat* ⇒ *real list*) (*n*::*nat*).
((λ*x n*. ((((*f-UnitDelay 0*) ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*)
• ((*f-Id* ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*)) *f n* =
((λ*x n*. [*if n* = *0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))]) *f n*))
using *f-Id-def f-UnitDelay-def* **apply** (*simp*)
by (*metis drop-0 drop-Suc list.sel*(*1*) *take-Nil take-Suc*)
then show *?thesis*
by *auto*
qed
then show *?thesis*
by (*simp add*: *f1 f1-0*)
qed

end

C Post Landing Finalize

This is a case study of a subsystem named post landing finalize that is used in aircraft cabin pressure control application. It is from Honeywell through D-risQ. This case is published in [28] and the diagram of this subsystem is shown in Figure 2 of the paper.

theory *post-landing-finalize-1*
imports

simu-contract-real
simu-contract-real-laws
begin

recall-syntax

sledgehammer-params[
timeout = *200*,
verbose = *false*,
strict = *true*
]

C.1 Subsystem: *variableTimer*

This subsystem has a rate parameter which is equal to 10.

abbreviation *Rate* ≡ *10*

This subsystem is composed of two small parts: *variableTimer1* and *variableTimer2*.

abbreviation *variableTimer1* ≡
((((*Min2* ; ; *UnitDelay 0*) $\|_B$ (*Const 1*)) ; ; *Sum2*) $\|_B$ *Id* $\|_B$ (*Const 0*)) ; ; (*Switch1 0.5*) ; ; *Split2*

variableTimer1 is simplified by *variableTimer1-simp* to a simple design.

lemma *variableTimer1-simp*:
variableTimer1 = (*FBlock* (λ*x n*. *True*) (*3*) *2* (λ*x n*. [*if* (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*,
if (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*]))
proof −

have *f1*: (*Min2* ; ; *UnitDelay 0*) = (*FBlock* (λ*x n*. *True*) (*2*) (*1*) ((*f-UnitDelay 0*) *o f-Min2*))
using *SimBlock-Min2 SimBlock-UnitDelay* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *FBlock-seq-comp*)
then have *f1-0*: ... = (*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))]))
proof −
have *FBlock* (λ*f n*. *True*) *2 1* (*f-UnitDelay 0* ∘ *f-Min2*) = *FBlock* (λ*f n*. *True*) *2 1*
(λ*f n*. [*if n* = *0 then 0 else min* (*hd* (*f* (*n* − *1*))) (*hd* (*tl* (*f* (*n* − *1*))))]) ∨
(∀*f n*. (*f-UnitDelay 0* ∘ *f-Min2*) *f n* = [*if n* = *0 then 0 else*
min (*hd* (*f* (*n* − *1*))) (*hd* (*tl* (*f* (*n* − *1*))))])
by (*simp add*: *f-Min2-def f-UnitDelay-def*)
then show *?thesis*
by *meson*
qed
have *simblock-f1*: *SimBlock 2 1* (*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))]))
by (*metis* (*no-types*, *lifting*) *Min2-def SimBlock-Min2 SimBlock-FBlock-seq-comp*

SimBlock-UnitDelay UnitDelay-def f1 f1-0)

have *1*: ((λ*x n*. [*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))]) ∘
(λ*xx nn*. *take 2* (*xx nn*)))
= (λ*x n*. [*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))])
proof −
have ∀ *x n*. (((λ*x n*. [*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))]) ∘
(λ*xx nn*. *take 2* (*xx nn*))) *x n*
= (λ*x n*. [*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))]) *x n*)
apply (*rule allI*)+
proof −
fix *x* :: *'c* ⇒ *'d list* **and** *n* :: *'c*
have *f1*: ∀ *ds*. *ds* = [] ∨ (*hd ds*::*'d*) = *ds*!(*0*::*nat*)
using *hd-conv-nth* **by** *blast*
have *f2*: ¬ *x* (*n* − *1*) = [] ⟶ ¬ *take 2* (*x* (*n* − *1*)) = []
by *simp*
have *f3*: *take* (*Suc 0*) (*tl* (*x* (*n* − *1*))) = *tl* (*take* (*Suc* (*Suc 0*)) (*x* (*n* − *1*)))
by (*simp add*: *tl-take*)
have *f4*: *take 2* (*x* (*n* − *1*)) = *take* (*Suc* (*Suc 0*)) (*x* (*n* − *1*))
using *numeral-2-eq-2* **by** *presburger*
have *f5*: *hd* (*tl* (*x* (*n* − *1*))) = *tl* (*x* (*n* − *1*))!(*0*::*nat*) ∧
hd (*tl* (*take 2* (*x* (*n* − *1*)))) = *tl* (*take 2* (*x* (*n* − *1*)))!(*0*::*nat*) ∧
¬ *x* (*n* − *1*) = [] ⟶ *min* (*hd* (*take 2* (*x* (*n* − *1*))))
(*hd* (*tl* (*take 2* (*x* (*n* − *1*))))) = *min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))
using *f3 f2 f1* **by** (*metis One-nat-def less-numeral-extra*(*1*) *nth-take numeral-2-eq-2 pos2*)
have *f6*: ¬ *tl* (*take 2* (*x* (*n* − *1*))) = [] ⟶ ¬ *Suc 0* = *0* ∧ ¬ *tl* (*x* (*n* − *1*)) = []
using *f4 f3* **by** *fastforce*
have *f7*: ¬ *Suc 0* = *0*
by *blast*
{ assume ¬ ((λ*f c*. [*if c = 0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n = 0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))]
{ assume ¬ (*if n = 0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))) = *min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))
moreover
{ assume ¬ *min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*))))) = *min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))
moreover
{ assume ¬ *hd* (*take 2* (*x* (*n* − *1*))) = *hd* (*x* (*n* − *1*))
{ assume ¬ *x* (*n* − *1*) = []
moreover
{ assume *tl* (*x* (*n* − *1*)) = [] ∧ *hd* (*x* (*n* − *1*)) = *x* (*n* − *1*)!(*0*::*nat*) ∧ *hd* (*take 2* (*x* (*n* − *1*))) = *take 2* (*x* (*n* − *1*))!(*0*::*nat*)
moreover
{ assume (*tl* (*x* (*n* − *1*)) = [] ∧ *hd* (*x* (*n* − *1*)) = *x* (*n* − *1*)!(*0*::*nat*) ∧ *hd* (*take 2* (*x* (*n* − *1*))) = *take 2* (*x* (*n* − *1*))!(*0*::*nat*)) ∧ ¬ ((λ*f c*. [*if c = 0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n = 0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))]
moreover
{ assume (*tl* (*x* (*n* − *1*)) = [] ∧ *hd* (*x* (*n* − *1*)) = *x* (*n* − *1*)!(*0*::*nat*) ∧ *hd* (*take 2* (*x* (*n* − *1*))) = *take 2* (*x* (*n* − *1*))!(*0*::*nat*)) ∧ ¬ (*if n = 0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))) = *min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*))))))
then have *tl* (*take 2* (*x* (*n* − *1*))) = [] ⟶ *n* = *0*
by (*metis* (*no-types*) *nth-take pos2*) **}**
ultimately have ((λ*f c*. [*if c = 0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] ∧ *tl*

(take 2 (x (n − 1))) = [] ⟶ n = 0
by *fastforce* **}**
ultimately have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))] ∧ tl (take 2 (x (n − 1))) = [] ⟶ ((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))] ∨ n = 0*
by *blast* **}**
moreover
{ assume *¬ tl (x (n − 1)) = []*
then have *¬ tl (take 2 (x (n − 1))) = []*
using *f7 f4 f3* **by** *(metis (no-types) take-eq-Nil)* **}**
ultimately have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))] ∧ tl (take 2 (x (n − 1))) = [] ⟶ ((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))] ∨ n = 0*
using *f2 f1* **by** *blast* **}**
then have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))] ∧ tl (take 2 (x (n − 1))) = [] ⟶ ((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))] ∨ n = 0*
by *fastforce* **}**
moreover
{ assume *¬ tl (take 2 (x (n − 1))) = []*
moreover
{ assume *¬ tl (take 2 (x (n − 1))) = [] ∧ ¬ ((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))]*
moreover
{ assume *¬ tl (take 2 (x (n − 1))) = [] ∧ ¬ (if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))) = min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))*
moreover
{ assume *¬ tl (take 2 (x (n − 1))) = [] ∧ ¬ min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1))))) = min (hd (x (n − 1))) (hd (tl (x (n − 1))))*
then have *¬ tl (take 2 (x (n − 1))) = [] ∧ ¬ x (n − 1) = []*
by *(metis take-eq-Nil)*
moreover
{ assume *(hd (tl (x (n − 1))) = tl (x (n − 1))!(0::nat) ∧ hd (tl (take 2 (x (n − 1)))) = tl (take 2 (x (n − 1)))!(0::nat) ∧ ¬ x (n − 1) = []) ∧ ¬ ((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))]*
then have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))] ⟶ (hd (tl (x (n − 1))) = tl (x (n − 1))!(0::nat) ∧ hd (tl (take 2 (x (n − 1)))) = tl (take 2 (x (n − 1)))!(0::nat) ∧ ¬ x (n − 1) = []) ∧ ¬ (if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))) = min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))*
by *fastforce*
then have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))] ⟶ n = 0*
using *f5* **by** *(metis (no-types))* **}**
ultimately have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [min (hd (take 2 (x (n − 1)))) (hd (tl (take 2 (x (n − 1)))))] ⟶ ((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c − 1))))]) ∘ (λf c. take 2 (f c))) x n = [if n = 0 then 0 else min (hd (x (n − 1))) (hd (tl (x (n − 1))))] ∨ n = 0*
using *f6 f1* **by** *blast* **}**
ultimately have *((λf c. [if c = 0 then 0 else min (hd (f (c − 1))) (hd (tl (f (c −*

1))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] ⟶ ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))] ∨ *n* = *0*
by *fastforce* **}**
ultimately have ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] ⟶ ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))] ∨ *n* = *0*
by *force* **}**
ultimately have ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] ⟶ ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))] ∨ *n* = *0*
by *blast* **}**
ultimately have ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] ⟶ ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))] ∨ *n* = *0*
using *f3 numeral-2-eq-2* **by** *force* **}**
ultimately have ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] ⟶ ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))] ∨ *n* = *0*
by *presburger* **}**
moreover
{ assume ¬ ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))]
then have ¬ [*if n* = *0 then 0 else min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))] = [*min* (*hd* (*take 2* (*x* (*n* − *1*)))) (*hd* (*tl* (*take 2* (*x* (*n* − *1*)))))]
by *simp*
then have *n* = *0*
by *presburger* **}**
ultimately have ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))]
by *fastforce* **}**
then show ((λ*f c*. [*if c* = *0 then 0 else min* (*hd* (*f* (*c* − *1*))) (*hd* (*tl* (*f* (*c* − *1*))))]) ∘ (λ*f c*. *take 2* (*f c*))) *x n* = [*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))]
by *blast*
qed
then show *?thesis*
by *blast*
qed
have *f2*: ((*Min2* ; ; *UnitDelay 0*) ‖$_B$ (*Const 1*)) =
(*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))])) ‖$_B$ (*Const 1*)
using *f1 f1-0* **by** *auto*
then have *f2-0*: ... = *FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. ((((λ*x n*. [*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))]) ∘
(λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• (((*f-Const 1*) ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*))
using *SimBlock-Const simblock-f1* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *numeral-2-eq-2*)
then have *f2-1*: ... = *FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*))))), *1*])
using *1 f-Const-def* **by** (*simp add*: *1*)

have *simblock-f2*: *SimBlock 2 2* (*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*))))), *1*]))
by (*metis* (*no-types*, *lifting*) *Const-def SimBlock-Const SimBlock-FBlock-parallel-comp*
Suc-1 Suc-eq-plus1 add-2-eq-Suc f2-0 f2-1 numeral-2-eq-2 simblock-f1)

have *f3*: (((*Min2* ;; *UnitDelay 0*) $\|_B$ (*Const 1*)) ;; *Sum2*) =
(*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*))))), *1*])) ;; *Sum2*
using *f2 f2-0 f2-1* **by** *auto*
have *f3-0*: ... = (*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(*f-Sum2 o* (λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))), *1*])))
using *SimBlock-Sum2 simblock-f2* **by** (*simp add*: *FBlock-seq-comp f-sim-blocks*)
have *f3-1*: ... = (*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*]))
proof −
have ∀ *x n*. ((*f-Sum2 o* (λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))),
1])) *x n*)
= ((λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*]) *x n*)
by (*simp add*: *f-Sum2-def*)
then show *?thesis*
by *presburger*
qed
have *simblock-f3*: *SimBlock 2 1* (*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*]))
by (*metis* (*no-types*, *lifting*) *SimBlock-FBlock-seq-comp SimBlock-Sum2 Sum2-def f3-0 f3-1 simblock-f2*)

have *f4*: (*Id* $\|_B$ (*Const 0*)) = (*FBlock* (λ*x n*. *True*) (*1*) (*2*)
(λ*x n*. (((*f-Id* ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*) • (((*f-Const 0*) ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*)))
using *SimBlock-Const SimBlock-Id* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *numeral-2-eq-2*)
then have *f4-0*: ... = *FBlock* (λ*x n*. *True*) *1 2* (λ*x n*. [*hd*(*x n*), *0*])
proof −
have ∀ *x n*. ((λ*x n*. (((*f-Id* ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*) •
(((*f-Const 0*) ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*)) *x n*)
= ((λ*x n*. [*hd*(*x n*), *0*]) *x n*)
by (*smt append.left-neutral append-Cons append-take-drop-id comp-apply f-Const-def*
f-Id-def hd-append2 take-eq-Nil zero-neq-one)
then show *?thesis*
by *presburger*
qed
have *simblock-f4*: *SimBlock* (*Suc 0*) *2* (*FBlock* (λ*x n*. *True*) (*Suc 0*) *2* (λ*x n*. [*hd*(*x n*), *0*]))
using *SimBlock-Const SimBlock-Id SimBlock-FBlock-seq-comp*
by (*metis* (*no-types*, *lifting*) *Const-def Id-def One-nat-def SimBlock-FBlock-parallel-comp*
Suc-eq-plus1-left f4 f4-0 nat-1-add-1)

have *f5*: ((((*Min2* ;; *UnitDelay 0*) $\|_B$ (*Const 1*)) ;; *Sum2*) $\|_B$ *Id*) =
(*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*])) $\|_B$ *Id*
using *f3 f3-0 f3-1* **by** *auto*
then have *f5-0*: ... =
(*FBlock* (λ*x n*. *True*) (*3*) (*2*)
(λ*x n*. ((((λ*x n*. [(*if n = 0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*])
∘ (λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• ((*f-Id* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*)))
using *simblock-f3 SimBlock-Id* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)

by (*simp add*: *numeral-2-eq-2*)
then have *f5-1*: ... =
(*FBlock* (λ*x n*. *True*) (*3*) (*2*)
(λ*x n*. [(*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*, (*x n*)!*2*]))
proof −
have *11*: ∀ *inouts*$_v$ *x*. (*min* (*hd* (*take 2* (*inouts*$_v$ (*x* − *Suc 0*)))) (*hd* (*tl* (*take 2* (*inouts*$_v$ (*x* − *Suc 0*))))) + *1*)
= *min* (*hd* (*inouts*$_v$ (*x* − *Suc 0*))) (*hd* (*tl* (*inouts*$_v$ (*x* − *Suc 0*)))) + *1*
by (*smt Suc-1 append-take-drop-id diff-Suc-1 hd-append2 take-eq-Nil tl-take zero-neq-one zero-not-eq-two*)
have *12*: ∀ *inouts*$_v$ *x*. (*length*(*inouts*$_v$ *x*) = *3* ⟶
(*f-Id* (λ*nn*. *drop 2* (*inouts*$_v$ *nn*)) *x*) = [*inouts*$_v$ *x*!(*2*)])
by (*simp add*: *f-Id-def hd-drop-conv-nth*)
have *2*: ∀ *inouts*$_v$ *x*. (*length*(*inouts*$_v$ *x*) = *3* ⟶
(((*min* (*hd* (*take 2* (*inouts*$_v$ (*x* − *Suc 0*)))) (*hd* (*tl* (*take 2* (*inouts*$_v$ (*x* − *Suc 0*))))) + *1*) #
f-Id (λ*nn*. *drop 2* (*inouts*$_v$ *nn*)) *x*)
= [*min* (*hd* (*inouts*$_v$ (*x* − *Suc 0*))) (*hd* (*tl* (*inouts*$_v$ (*x* − *Suc 0*)))) + *1*, *inouts*$_v$ *x*!(*2*)]))
using *11 12* **by** *blast*
show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-auto*)
apply (*metis* (*no-types*, *lifting*) *One-nat-def Suc-1 f-Id-def hd-drop-conv-nth lessI numeral-3-eq-3*)
using *11 12 2*
apply *metis*
apply (*simp add*: *12*)
apply (*simp add*: *11 12*)
by (*simp add*: *f-Id-def*)
qed
have *simblock-f5*: *SimBlock 3 2* (*FBlock* (λ*x n*. *True*) (*3*) (*2*)
(λ*x n*. [(*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*, (*x n*)!*2*]))
by (*smt Id-def SimBlock-Id SimBlock-FBlock-parallel-comp add.commute f5-0 f5-1 one-add-one one-plus-numeral semiring-norm*(*3*) *simblock-f3*)

have *f6*: ((((*Min2* ;; *UnitDelay 0*) ‖$_B$ (*Const 1*)) ;; *Sum2*) ‖$_B$ *Id* ‖$_B$ (*Const 0*))
= (*FBlock* (λ*x n*. *True*) (*3*) (*2*)
(λ*x n*. [(*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*, (*x n*)!*2*]))
‖$_B$ (*Const 0*)
using *f5 f5-0 f5-1* **by** *auto*
then have *f6-0*: ... = (*FBlock* (λ*x n*. *True*) (*3*) (*3*)
(λ*x n*. ((((λ*x n*. [(*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*, (*x n*)!*2*])
∘ (λ*xx nn*. *take 3* (*xx nn*))) *x n*)
• (((*f-Const 0*) ∘ (λ*xx nn*. *drop 3* (*xx nn*)))) *x n*)))
using *simblock-f5 SimBlock-Const* **by** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
then have *f6-1*: ... = (*FBlock* (λ*x n*. *True*) (*3*) (*3*)
(λ*x n*. [(*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*, (*x n*)!*2*, *0*]))
proof −
have *11*: ∀ *inouts*$_v$ *x*. ((*f-Const 0* (λ*nn*. *drop 3* (*inouts*$_v$ *nn*)) *x*)) = [*0*]
by (*simp add*: *f-Const-def*)
have *12*: ∀ *inouts*$_v$ *x*. *length*(*inouts*$_v$ *x*) = *3* ⟶ (*take 3* (*inouts*$_v$ *x*)) = *inouts*$_v$ (*x*)
by *simp*

show *FBlock* (λ*x n*. *True*) *3 3*
(λ*x n*. ((λ*x n*. [(*if n* = *0 then 0 else min* (*hd* (*x* (*n* − *1*))) (*hd* (*tl* (*x* (*n* − *1*))))) + *1*, *x n*!(*2*)]) ∘
(λ*xx nn*. *take 3* (*xx nn*))) *x n* • (*f-Const 0* ∘ (λ*xx nn*. *drop 3* (*xx nn*))) *x n*)

```
= FBlock (λx n. True) 3 3 (λx n. [(if n = 0 then 0 else min (hd (x (n − 1)))
      (hd (tl (x (n − 1))))) + 1, x n!(2), 0])
apply (simp add: FBlock-def)
apply (rel-auto)
apply (simp add: f-Const-def)
proof −
  fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list and x::nat
  assume a1: ∀x. (x = 0 ⟶
    length(inouts_v 0) = 3 ∧
    length(inouts_v' 0) = 3 ∧ 1 # inouts_v 0!(2) # f-Const 0 (λnn. drop 3 (inouts_v nn)) 0 =
inouts_v' 0) ∧
   (0 < x ⟶
    length(inouts_v x) = 3 ∧
    length(inouts_v' x) = 3 ∧
    (min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0))))) + 1) #
    inouts_v x!(2) # f-Const 0 (λnn. drop 3 (inouts_v nn)) x =
    inouts_v' x)
  assume a2: 0 < x
  from a1 have 1: ∀x. length(inouts_v x) = 3
    using gr0I by blast
  from a2 a1 have 2:
    (min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0))))) + 1) #
    inouts_v x!(2) # f-Const 0 (λnn. drop 3 (inouts_v nn)) x = inouts_v' x
    by blast
  from a2 1 have 3: take 3 (inouts_v (x − Suc 0)) = inouts_v (x − Suc 0)
    by simp
  show [min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1, inouts_v x!(2),
0] = inouts_v' x
    by (metis 1 11 2 order-refl take-all)
next
  fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list
  assume a1: ∀x. (x = 0 ⟶ length(inouts_v 0) = 3 ∧ length(inouts_v' 0) = 3 ∧ [1, inouts_v
0!(2), 0] = inouts_v' 0) ∧
   (0 < x ⟶
    length(inouts_v x) = 3 ∧
    length(inouts_v' x) = 3 ∧
    [min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1, inouts_v x!(2), 0] =
    inouts_v' x)
  show 1 # inouts_v 0!(2) # f-Const 0 (λnn. drop 3 (inouts_v nn)) 0 = inouts_v' 0
    by (simp add: 11 a1)
next
  fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list and x::nat
  assume a1: ∀x. (x = 0 ⟶ length(inouts_v 0) = 3 ∧ length(inouts_v' 0) = 3 ∧ [1, inouts_v
0!(2), 0] = inouts_v' 0) ∧
   (0 < x ⟶
    length(inouts_v x) = 3 ∧
    length(inouts_v' x) = 3 ∧
    [min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1, inouts_v x!(2), 0] =
    inouts_v' x)
  assume a2: x > 0
  from a1 have 1: ∀x. length(inouts_v x) = 3
    using gr0I by blast
  from a2 1 have 3: take 3 (inouts_v (x − Suc 0)) = inouts_v (x − Suc 0)
    by simp
  show (min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0))))) +
```

```
1) #
            inouts_v x!(2) # f-Const 0 (λnn. drop 3 (inouts_v nn)) x =
            inouts_v' x
          by (simp add: 11 3 a1 a2)
      next
        fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list
          and x::nat⇒real list and xa::nat
        show length(f-Const 0 (λnn. drop 3 (x nn)) xa) = Suc 0
          by (simp add: f-Const-def)
      qed
  qed
  have simblock-f6: SimBlock 3 3 (FBlock (λx n. True) (3) (3)
      (λx n. [(if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1, (x n)!2, 0]))
    using Const-def simblock-f5 SimBlock-FBlock-parallel-comp
    by (metis (no-types, lifting) One-nat-def SimBlock-Const Suc3-eq-add-3 add.commute
      add-2-eq-Suc' f6-0 f6-1 numeral-3-eq-3)

  have f7: ((((Min2 ;; UnitDelay 0) ‖_B (Const 1)) ;; Sum2) ‖_B Id ‖_B (Const 0)) ;; (Switch1 0.5)
    = (FBlock (λx n. True) (3) (3) (λx n. [(if n = 0 then 0 else
      (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1, (x n)!2, 0])) ;; (Switch1 0.5)
    using f6 f6-0 f6-1 by auto
  have f7-0: ... = (FBlock (λx n. True) (3) 1 ((f-Switch1 0.5) o (λx n. [(if n = 0 then 0 else
      (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1, (x n)!2, 0])))
    using simblock-f6 SimBlock-Switch1 by (simp add: FBlock-seq-comp Switch1-def)
  have f7-1: ... = FBlock (λx n. True) (3) 1
    (λx n. [if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1)
      else 0])
    proof −
      have 1: ∀ x n. (((f-Switch1 0.5) o (λx n. [(if n = 0 then 0 else
        (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1, (x n)!2, 0])) x n
      =
        (λx n. [if (x n)!2 ≥ 0.5
        then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1)
        else 0]) x n)
        apply (auto)
        by (simp add: f-Switch1-def)+
      then show ?thesis
        by presburger
    qed
  have simblock-f7: SimBlock 3 1 (FBlock (λx n. True) (3) 1
    (λx n. [if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0]))
    using simblock-f6 SimBlock-Switch1 SimBlock-FBlock-seq-comp f7 f7-0 f7-1
    by (metis (no-types, lifting) Switch1-def)

  have f8: ((((Min2 ;; UnitDelay 0) ‖_B (Const 1)) ;; Sum2) ‖_B Id ‖_B (Const 0)) ;;
      (Switch1 0.5) ;; Split2 =
    ((FBlock (λx n. True) (3) 1 (λx n. [if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0])) ;; Split2)
    by (metis RA1 f7 f7-0 f7-1)
  have f8-0: ... = (FBlock (λx n. True) (3) 2 (f-Split2 o (λx n. [if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0])))
    using simblock-f7 SimBlock-Split2
    by (simp add: FBlock-seq-comp Split2-def)
```

have *f8-1*: ... = (*FBlock* (λ*x n. True*) (*3*) *2* (λ*x n.* [*if* (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*,
if (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*]))
proof −
have *11*: ∀ *x n.* ((*f-Split2 o* (λ*x n.* [*if* (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*])) *x n*)
= (λ*x n.* [*if* (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*,
if (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*]) *x n*
apply (*auto*)
by (*simp add*: *f-Split2-def*)+
show *?thesis*
using *11* **by** *presburger*
qed
have *simblock-f8*: *SimBlock 3 2* (*FBlock* (λ*x n. True*) (*3*) *2* (λ*x n.* [*if* (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*,
if (*x n*)!*2* ≥ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*]))
using *simblock-f7 f8 f8-0 f8-1 SimBlock-Split2*
by (*metis* (*no-types*, *lifting*) *SimBlock-FBlock-seq-comp Split2-def*)
show *?thesis*
using *f8 f8-0 f8-1* **by** *auto*
qed

abbreviation *variableTimer2* ≡
((*Const 0*) ‖$_B$ *Id*) ; ; *Max2* ; ; (*Gain Rate*) ; ; *RoundCeil* ; ; *DataTypeConvInt32Zero* ; ; *Split2*

variableTimer2 is also simplified by *variableTimer2-simp*.

lemma *variableTimer2-simp*:
variableTimer2 = (*FBlock* (λ*x n. True*) (*Suc 0*) (*2*)
(λ*x n.* [*real-of-int* (*int32* (*RoundZero*(*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉))),
real-of-int (*int32* (*RoundZero*(*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉)))]))
proof −

have *f1*: ((*Const 0*) ‖$_B$ *Id*) = (*FBlock* (λ*x n. True*) (*1*) (*2*)
(λ*x n.* ((((*f-Const 0*) ∘ (λ*xx nn. take 0* (*xx nn*))) *x n*) • ((*f-Id* ∘ (λ*xx nn. drop 0* (*xx nn*)))) *x n*)))
using *SimBlock-Const SimBlock-Id* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *numeral-2-eq-2*)
then have *f1-0*: ... = *FBlock* (λ*x n. True*) (*Suc 0*) *2* (λ*x n.* [*0*, *hd*(*x n*)])
by (*simp add*: *f-blocks*)
have *simblock-f1*: *SimBlock* (*Suc 0*) *2* (*FBlock* (λ*x n. True*) (*Suc 0*) *2* (λ*x n.* [*0*, *hd*(*x n*)]))
using *SimBlock-Const SimBlock-Id SimBlock-FBlock-seq-comp*
by (*metis* (*no-types*, *lifting*) *f1 f1-0 Const-def Id-def SimBlock-FBlock-parallel-comp Suc-eq-plus1 nat-1-add-1*)

have *f2*: ((*Const 0*) ‖$_B$ *Id*) ; ; *Max2* = *FBlock* (λ*x n. True*) (*Suc 0*) *2* (λ*x n.* [*0*, *hd*(*x n*)]) ; ; *Max2*
using *f1-0* **by** (*simp add*: *f1*)
have *f2-0*: ... = *FBlock* (λ*x n. True*) (*Suc 0*) (*Suc 0*) (*f-Max2 o* (λ*x n.* [*0*, *hd*(*x n*)]))
using *simblock-f1 SimBlock-Max2* **by** (*simp add*: *FBlock-seq-comp f-sim-blocks*)
have *f2-1*: ... = *FBlock* (λ*x n. True*) (*Suc 0*) (*Suc 0*) (λ*x n.* [*max* (*hd*(*x n*)) *0*])
using *f-Max2-def*

by (*metis* (*mono-tags*, *lifting*) *comp-eq-dest-lhs list.sel*(*1*) *list.sel*(*3*) *max.commute*)
have *simblock-f2*: *SimBlock* (*Suc 0*) (*Suc 0*) (*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (λ*x n*. [*max* (*hd*(*x n*)) *0*]))
using *simblock-f1 SimBlock-Max2 SimBlock-FBlock-seq-comp*
by (*metis Max2-def One-nat-def f2-0 f2-1*)
have *f3*: ((*Const 0*) ‖$_B$ *Id*) ; ; *Max2* ; ; (*Gain Rate*) =
(*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (λ*x n*. [*max* (*hd*(*x n*)) *0*])) ; ; (*Gain Rate*)
using *f2-1 f2-0* **by** (*simp add*: *RA1 f2*)
then have *f3-0*: ... = *FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) ((*f-Gain Rate*) *o* (λ*x n*. [*max* (*hd*(*x n*)) *0*]))
using *SimBlock-Gain simblock-f2* **by** (*simp add*: *FBlock-seq-comp f-sim-blocks*)
then have *f3-1*: ... = *FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (λ*x n*. [*Rate* ∗ (*max* (*hd*(*x n*)) *0*)])
proof −
have ∀*f n*. (*f-Gain Rate* ∘ (λ*f n*. [*max* (*hd* (*f n*)) *0*])) *f n* = [*Rate* ∗ *max* (*hd* (*f n*)) *0*]
by (*simp add*: *f-Gain-def*)
then show *?thesis*
by *presburger*
qed
have *simblock-f3*: *SimBlock* (*Suc 0*) (*Suc 0*)
(*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (λ*x n*. [*Rate* ∗ (*max* (*hd*(*x n*)) *0*)]))
using *simblock-f2 SimBlock-Gain SimBlock-FBlock-seq-comp*
by (*metis Gain-def One-nat-def f3-0 f3-1*)

have *f4*: ((*Const 0*) ‖$_B$ *Id*) ; ; *Max2* ; ; (*Gain Rate*) ; ; *RoundCeil* =
(*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (λ*x n*. [*Rate* ∗ (*max* (*hd*(*x n*)) *0*)])) ; ; *RoundCeil*
using *f3-0 f3-1* **by** (*simp add*: *RA1 f2 f2-0 f2-1*)
then have *f4-0*: ... = (*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (
(*f-RoundCeil*) *o* (λ*x n*. [*Rate* ∗ (*max* (*hd*(*x n*)) *0*)])))
using *SimBlock-RoundCeil simblock-f3* **by** (*simp add*: *FBlock-seq-comp RoundCeil-def*)
then have *f4-1*: ... = (*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (
(λ*x n*. [*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉])))
proof −
have ∀*f n*. (*f-RoundCeil* ∘ (λ*f n*. [*Rate* ∗ *max* (*hd* (*f n*)) *0*])) *f n* = [*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*f n*)) *0*⌉]
by (*simp add*: *f-RoundCeil-def*)
then show *?thesis*
by *presburger*
qed
have *simblock-f4*: *SimBlock* (*Suc 0*) (*Suc 0*)
(*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) ((λ*x n*. [*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉])))
using *simblock-f3 SimBlock-RoundCeil SimBlock-FBlock-seq-comp*
by (*metis One-nat-def RoundCeil-def f4-0 f4-1*)

have *f5*: ((*Const 0*) ‖$_B$ *Id*) ; ; *Max2* ; ; (*Gain Rate*) ; ; *RoundCeil* ; ; *DataTypeConvInt32Zero*
= (*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*) (λ*x n*. [*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉]))
; ; *DataTypeConvInt32Zero*
by (*metis RA1 f4 f4-0 f4-1*)
then have *f5-0*: ... = (*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*)
(*f-DTConvInt32Zero o* (λ*x n*. [*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉])))
by (*metis DataTypeConvInt32Zero-def One-nat-def FBlock-seq-comp*
SimBlock-DataTypeConvInt32Zero simblock-f4)
then have *f5-1*: ... = (*FBlock* (λ*x n*. *True*) (*Suc 0*) (*Suc 0*)
(λ*x n*. [*real-of-int* (*int32* (*RoundZero*(*real-of-int* ⌈*Rate* ∗ (*max* (*hd*(*x n*)) *0*)⌉))])))
proof −
have ∀*f n*. (*f-DTConvInt32Zero* ∘ (λ*f n*. [*real-of-int* ⌈(*Rate*::*real*) ∗ *max* (*hd* (*f n*)) *0*⌉])) *f n*

```
        = [real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (f n)) 0⌉)))]
    by (simp add: f-DTConvInt32Zero-def)
  then show ?thesis
    by presburger
qed
have simblock-f5: SimBlock (Suc 0) (Suc 0) ((FBlock (λx n. True) (Suc 0) (Suc 0)
          (λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉)))])))
  by (metis DataTypeConvInt32Zero-def One-nat-def SimBlock-DataTypeConvInt32Zero
        SimBlock-FBlock-seq-comp f5-0 f5-1 simblock-f4)

have f6: ((Const 0) ‖B Id) ;; Max2 ;; (Gain Rate) ;; RoundCeil ;; DataTypeConvInt32Zero ;;
Split2
    = ((FBlock (λx n. True) (Suc 0) (Suc 0)
          (λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉)))]))
      ;; Split2
  by (metis RA1 f5 f5-0 f5-1)
then have f6-0: ... = (FBlock (λx n. True) (Suc 0) (2)
  (f-Split2 o (λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉)))]))
  by (metis Split2-def One-nat-def FBlock-seq-comp
      SimBlock-Split2 simblock-f5)
then have f6-1: ... = (FBlock (λx n. True) (Suc 0) (2)
  (λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉))),
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉)))])
proof −
  have ∀f n. [real-of-int (int32 (RoundZero (real-of-int ⌈(Rate::real) * max (hd (f n)) 0⌉))),
          real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (f n)) 0⌉)))] =
    (f-Split2 ∘ (λf n. [real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (f n)) 0⌉)))])) f n
    by (simp add: f-Split2-def)
  then show ?thesis
    by presburger
qed
have simblock-f6: SimBlock 1 2 (FBlock (λx n. True) (Suc 0) (2)
  (λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉))),
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max (hd(x n)) 0)⌉)))])
  by (metis (no-types, lifting) One-nat-def SimBlock-FBlock-seq-comp SimBlock-Split2
    Split2-def f6-0 f6-1 simblock-f5)
show ?thesis
  by (simp add: f6 f6-0 f6-1)
qed
```

The *variableTimer* subsystem is composed of two parts by means of parallel composition and feedback.

```
definition variableTimer ≡
  (((variableTimer1 ‖B variableTimer2) fD (0,0)) fD (0,2)) ;; RopGT
```

vT-fd-sol-1 calculates the output from its current and past inputs recursively. It is a solution for the first feedback in *variableTimer*.

```
fun vT-fd-sol-1:: (nat ⇒ real) ⇒ (nat ⇒ real) ⇒ nat ⇒ real where
vT-fd-sol-1 door-open-time door-open 0 =
   (if door-open 0 ≥ 0.5 then 1.0 else 0 ) |
vT-fd-sol-1 door-open-time door-open (Suc n) =
   (if door-open (Suc n) ≥ 0.5
    then ((min (vT-fd-sol-1 door-open-time door-open n) (door-open-time n)) + 1)
    else 0)
```

vT-fd-sol-1 is proved to be a solution for the first feedback. This lemma will be used later to expand the first feedback.

lemma *vT-fd-sol-1-is-a-solution*:
fixes $inouts_0$::*nat* ⇒ *real list* **and** *n*::*nat*
assumes *a1*: ∀ *x*. *length*($inouts_0$ *x*) = *3*
shows *0* < *n* ⟶ (*1* ≤ $inouts_0$ *n*!(*Suc 0*) ∗ *2* ⟶
vT-fd-sol-1 (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) *n* =
min (*vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*))
(*hd* ($inouts_0$ (*n* − *Suc 0*))) + *1*) ∧
(¬ *1* ≤ $inouts_0$ *n*!(*Suc 0*) ∗ *2* ⟶
vT-fd-sol-1 (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) *n* = *0*)
apply (*clarify*, *rule conjI*, *clarify*)
defer
apply (*clarify*)
proof −
assume *a1*: *0* < *n*
assume *a2*: ¬ *1* ≤ $inouts_0$ *n*!(*Suc 0*) ∗ *2*
from *a2* **have** *a2′*: $inouts_0$ *n*!(*Suc 0*) < *0.5*
by (*simp*)
have *1*: *vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) *n*
= *vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) (*Suc* (*n* − *Suc 0*))
using *a1* **by** *simp*
show *vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) *n* = *0*
apply (*simp add*: *1*)
using *a2′* **by** (*simp add*: *a1*)
next
assume *a1*: *0* < *n*
assume *a2*: *1* ≤ $inouts_0$ *n*!(*Suc 0*) ∗ *2*
from *a2* **have** *a2′*: $inouts_0$ *n*!(*Suc 0*) ≥ *0.5*
by (*simp*)
have *1*: *vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) *n*
= *vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) (*Suc* (*n* − *Suc 0*))
using *a1* **by** *simp*
show *vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) *n* =
min (*vT-fd-sol-1* (λ*n1*. *hd* ($inouts_0$ *n1*)) (λ*n1*. $inouts_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*))
(*hd* ($inouts_0$ (*n* − *Suc 0*))) + *1*
apply (*simp add*: *1*)
using *a2′ a1* **by** *simp*
qed

variableTimer-simp-pat-f gives the function definition of the finally simplified subsystem.

abbreviation *variableTimer-simp-pat-f*
≡ (λ*x na*. [*if* (*if 1* ≤ *x na*!(*0*) ∗ *2*
then (*if na* = *0 then 0*
else min (*vT-fd-sol-1*
(λ*n1*. (λ*na*. *real-of-int*
(*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*x na*!(*Suc 0*)) *0*⌉)))) *n1*)
(λ*n1*. (*x n1*)!(*0*)) (*na* − *1*))
((λ*na*. *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*x na*!(*Suc 0*)) *0*⌉))))
(*na* − *1*))) + *1*
else 0) > (*real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*x na*!(*Suc 0*)) *0*⌉))))
then 1 else 0])

variableTimer-simp-pat is the simplified block for the subsystem.

abbreviation *variableTimer-simp-pat*

$\equiv$ (*FBlock* ($\lambda x\ n.\ True$) (*2*) *1 variableTimer-simp-pat-f*)

variableTimer-simp-pat is also a block.

lemma *SimBlock-variableTimer-simp*:
SimBlock 2 1 variableTimer-simp-pat
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = $\lambda na.$ [*0*, *0*] **in** *exI*)
apply (*rule-tac x* = $\lambda na.$ [*0*] **in** *exI*)
apply (*simp*)
apply (*simp add*: *int32-def RoundZero-def*)
by *simp*

variableTimer-simp simplifies the subsystem into a block.

lemma *variableTimer-simp*:
variableTimer = *variableTimer-simp-pat*
proof −
let *?vt-f* = ($\lambda x\ na.$ [*if* (*if 1* $\leq$ *x na*!(*0*) $*$ *2*
then (*if na* = *0 then 0*
else min (*vT-fd-sol-1*
($\lambda n1.$ ($\lambda na.$ *real-of-int*
(*int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*x na*!(*Suc 0*)) *0*$\rceil$)))) *n1*)
($\lambda n1.$ (*x n1*)!(*0*)) (*na* − *1*))
(($\lambda na.$ *real-of-int* (*int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*x na*!(*Suc 0*)) *0*$\rceil$))))
(*na* − *1*))) + *1*
else 0) > (*real-of-int* (*int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*x na*!(*Suc 0*)) *0*$\rceil$))))
then 1 else 0])

have *simblock-variableTimer1*: *SimBlock 3 2* (*FBlock* ($\lambda x\ n.\ True$) (*3*) *2* ($\lambda x\ n.$ [*if* (*x n*)!*2* $\geq$ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*,
if (*x n*)!*2* $\geq$ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*]))
apply (*simp add*: *SimBlock-def FBlock-def*)
apply (*rel-auto*)
apply (*rule-tac x* = $\lambda na.$ [*2*, *1*, *0.51*] **in** *exI*, *simp*)
apply (*rule-tac x* = $\lambda na.$ (*if na* = *0 then* [*1*,*1*] *else* [*2*,*2*]) **in** *exI*)
by (*simp*)
have *simblock-variableTimer2*: *SimBlock* (*Suc 0*) *2* (*FBlock* ($\lambda x\ n.\ True$) (*Suc 0*) (*2*)
($\lambda x\ n.$ [*real-of-int* (*int32* (*RoundZero*(*real-of-int* $\lceil$*Rate* $*$ (*max* (*hd*(*x n*)) *0*)$\rceil$))),
real-of-int (*int32* (*RoundZero*(*real-of-int* $\lceil$*Rate* $*$ (*max* (*hd*(*x n*)) *0*)$\rceil$)))]))
apply (*simp add*: *SimBlock-def FBlock-def*)
apply (*rel-auto*)
apply (*rule-tac x* = $\lambda na.$ [*1*] **in** *exI*, *simp*)
apply (*rule-tac x* = $\lambda na.$ [*Rate*,*Rate*] **in** *exI*, *simp*)
by (*simp add*: *RoundZero-def int32-def*)
have *f1*: (*variableTimer1* $\|_B$ *variableTimer2*)
= (*FBlock* ($\lambda x\ n.\ True$) (*3*) *2* ($\lambda x\ n.$ [*if* (*x n*)!*2* $\geq$ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*,
if (*x n*)!*2* $\geq$ *0.5*
then ((*if n* = *0 then 0 else* (*min* (*hd*(*x* (*n*−*1*))) (*hd*(*tl*(*x* (*n*−*1*)))))) + *1*) *else 0*]))
$\|_B$
(*FBlock* ($\lambda x\ n.\ True$) (*Suc 0*) (*2*)
($\lambda x\ n.$ [*real-of-int* (*int32* (*RoundZero*(*real-of-int* $\lceil$*Rate* $*$ (*max* (*hd*(*x n*)) *0*)$\rceil$))),
real-of-int (*int32* (*RoundZero*(*real-of-int* $\lceil$*Rate* $*$ (*max* (*hd*(*x n*)) *0*)$\rceil$)))]))
using *variableTimer1-simp variableTimer2-simp* **by** *auto*
then have *f1-0*: ... = (*FBlock* ($\lambda x\ n.\ True$) (*4*) *4*

```
 (λx n. ((((λx n.
          [if (x n)!2 ≥ 0.5
            then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
            if (x n)!2 ≥ 0.5
            then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0])
        ∘ (λxx nn. take 3 (xx nn))) x n)
      • (((λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max (hd(x n)) 0)⌉))),
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max (hd(x n)) 0)⌉)))])
        ∘ (λxx nn. drop 3 (xx nn)))) x n)))
using simblock-variableTimer1 simblock-variableTimer2 by (simp add: FBlock-parallel-comp f-sim-blocks)
then have f1-1: ... = (FBlock (λx n. True) (4) 4
 ((λx n.
    [if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
      if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
      real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max ((x n)!3) 0)⌉))),
      real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max ((x n)!3) 0)⌉))))]))
 proof −
  have 11: ∀ x n. ((length(x n) = 4) ⟶ ((λx n. ((((λx n.
          [if (x n)!2 ≥ 0.5
            then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
            if (x n)!2 ≥ 0.5
            then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0])
        ∘ (λxx nn. take 3 (xx nn))) x n)
      • (((λx n. [real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max (hd(x n)) 0)⌉))),
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max (hd(x n)) 0)⌉)))])
        ∘ (λxx nn. drop 3 (xx nn)))) x n)) x n)
    = ((λx n.
    [if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
      if (x n)!2 ≥ 0.5
      then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
      real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max ((x n)!3) 0)⌉))),
      real-of-int (int32 (RoundZero(real-of-int ⌈Rate ∗ (max ((x n)!3) 0)⌉))))]) x n))
    apply (auto)
    apply (simp add: hd-drop-conv-nth)
    apply (smt diff-Suc-1 hd-conv-nth list.sel(2) nth-take numeral-3-eq-3 take-eq-Nil tl-take
      zero-less-Suc zero-neq-numeral)
  apply (metis eval-nat-numeral(2) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27))
    by (metis eval-nat-numeral(2) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27))
  show ?thesis
    apply (simp add: FBlock-def)
    apply (rel-simp)
    apply (rule iffI)
    apply (clarify)
    apply (rule conjI)
    apply (clarify)
    apply (rule conjI)
    apply (clarify)
  apply (metis eval-nat-numeral(2) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27))
  apply (metis eval-nat-numeral(2) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27))
    apply (clarify)
    apply (rule conjI)
    apply (clarify)
```

apply (*rule conjI*)
apply *blast*
apply (*rule conjI*)
apply *blast*
proof −
fix ok_v **and** $inouts_v$::*nat*⇒*real list* **and** $ok_v{}'$ **and** $inouts_v{}'$::*nat*⇒*real list*
and *x*::*nat*
assume *a1*: ∀ *x*. (*x* = *0* ⟶
(*1* ≤ $inouts_v$ *0*!(*2*) ∗ *2* ⟶
length($inouts_v$ *0*) = *4* ∧
length($inouts_v{}'$ *0*) = *4* ∧
[*1*, *1*, *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *0*)))
0⌉))),
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *0*))) *0*⌉)))] =
$inouts_v{}'$ *0*) ∧
(¬ *1* ≤ $inouts_v$ *0*!(*2*) ∗ *2* ⟶
length($inouts_v$ *0*) = *4* ∧
length($inouts_v{}'$ *0*) = *4* ∧
[*0*, *0*, *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *0*)))
0⌉))),
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *0*))) *0*⌉)))] =
$inouts_v{}'$ *0*)) ∧
(*0* < *x* ⟶
(*1* ≤ $inouts_v$ *x*!(*2*) ∗ *2* ⟶
length($inouts_v$ *x*) = *4* ∧
length($inouts_v{}'$ *x*) = *4* ∧
[*min* (*hd* (*take 3* ($inouts_v$ (*x* − *Suc 0*)))) (*hd* (*tl* (*take 3* ($inouts_v$ (*x* − *Suc 0*))))) + *1*,
min (*hd* (*take 3* ($inouts_v$ (*x* − *Suc 0*)))) (*hd* (*tl* (*take 3* ($inouts_v$ (*x* − *Suc 0*))))) + *1*,
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *x*))) *0*⌉))),
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *x*))) *0*⌉)))] =
$inouts_v{}'$ *x*) ∧
(¬ *1* ≤ $inouts_v$ *x*!(*2*) ∗ *2* ⟶
length($inouts_v$ *x*) = *4* ∧
length($inouts_v{}'$ *x*) = *4* ∧
[*0*, *0*, *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *x*)))
0⌉))),
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*hd* (*drop 3* ($inouts_v$ *x*))) *0*⌉)))] =
$inouts_v{}'$ *x*))
assume *a2*: *0* < *x*
assume *a3*: *1* ≤ $inouts_v$ *x*!(*2*) ∗ *2*
from *a1* **have** *11*: ∀ *x*. *length*($inouts_v$ *x*) = *4*
using *a2* **by** *blast*
have *12*: *hd*(*drop 3* ($inouts_v$ *x*)) = ($inouts_v$ *x*!(*3*))
using *11* **by** (*simp add*: *hd-drop-conv-nth*)
have *13*: (*hd* (*take 3* ($inouts_v$ (*x* − *Suc 0*)))) = (*hd* ($inouts_v$ (*x* − *Suc 0*)))
using *a1* **by** (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *14*: (*hd* (*take 3* ($inouts_v$ (*x* − *Suc 0*)))) = (*hd* ($inouts_v$ (*x* − *Suc 0*)))
using *a1* **by** (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *15*: (*hd* (*tl* (*take 3* ($inouts_v$ (*x* − *Suc 0*))))) = (*hd* (*tl* ($inouts_v$ (*x* − *Suc 0*))))
by (*metis Zero-not-Suc append-take-drop-id hd-append2 numeral-3-eq-3 take-eq-Nil take-tl*)
show [*min* (*hd* ($inouts_v$ (*x* − *Suc 0*))) (*hd* (*tl* ($inouts_v$ (*x* − *Suc 0*)))) + *1*,
min (*hd* ($inouts_v$ (*x* − *Suc 0*))) (*hd* (*tl* ($inouts_v$ (*x* − *Suc 0*)))) + *1*,
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* ($inouts_v$ *x*!(*3*)) *0*⌉))),
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* ($inouts_v$ *x*!(*3*)) *0*⌉)))] =
$inouts_v{}'$ *x*

```
      using 11 12 13 14 15 by (metis a1 a2 a3)
    next
      fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list
        and x::nat
      assume a1: ∀x. (x = 0 ⟶
        (1 ≤ inouts_v 0!(2) * 2 ⟶
         length(inouts_v 0) = 4 ∧
         length(inouts_v' 0) = 4 ∧
          [1, 1, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v 0)))
0⌉))),
           real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v 0))) 0⌉)))] =
          inouts_v' 0) ∧
        (¬ 1 ≤ inouts_v 0!(2) * 2 ⟶
         length(inouts_v 0) = 4 ∧
         length(inouts_v' 0) = 4 ∧
          [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v 0)))
0⌉))),
           real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v 0))) 0⌉)))] =
          inouts_v' 0)) ∧
       (0 < x ⟶
        (1 ≤ inouts_v x!(2) * 2 ⟶
         length(inouts_v x) = 4 ∧
         length(inouts_v' x) = 4 ∧
         [min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0))))) + 1,
          min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0))))) + 1,
          real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x))) 0⌉))),
          real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x))) 0⌉)))] =
         inouts_v' x) ∧
        (¬ 1 ≤ inouts_v x!(2) * 2 ⟶
         length(inouts_v x) = 4 ∧
         length(inouts_v' x) = 4 ∧
          [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x)))
0⌉))),
           real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x))) 0⌉)))] =
          inouts_v' x))
      have 11: hd (drop 3 (inouts_v x)) = inouts_v x!(3)
            by (metis a1 eval-nat-numeral(2) gr-zeroI hd-drop-conv-nth lessI semiring-norm(26)
semiring-norm(27))
      show ¬ 1 ≤ inouts_v x!(2) * 2 ⟶
        length(inouts_v x) = 4 ∧
        length(inouts_v' x) = 4 ∧
        [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(3)) 0⌉))),
         real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(3)) 0⌉)))] =
         inouts_v' x
         apply (auto)
         using a1 gr-zeroI apply blast
         using a1 gr-zeroI apply blast
         by (metis 11 a1 neq0-conv)
    next
      show ⋀ok_v inouts_v ok_v' inouts_v'.
       ok_v ⟶
       ok_v' ∧
       (∀x. (x = 0 ⟶
             (1 ≤ inouts_v 0!2 * 2 ⟶
              length(inouts_v 0) = 4 ∧
```

$length(inouts_v{}' \ 0) = 4 \ \wedge$
$[1, 1, real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ 0!3) \ 0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ 0!3) \ 0\rceil)))] =$
$inouts_v{}' \ 0) \ \wedge$
$(\neg \ 1 \leq inouts_v \ 0!2 * 2 \longrightarrow$
$length(inouts_v \ 0) = 4 \ \wedge$
$length(inouts_v{}' \ 0) = 4 \ \wedge$
$[0, 0, real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ 0!3) \ 0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ 0!3) \ 0\rceil)))] =$
$inouts_v{}' \ 0)) \ \wedge$
$(0 < x \longrightarrow$
$(1 \leq inouts_v \ x!2 * 2 \longrightarrow$
$length(inouts_v \ x) = 4 \ \wedge$
$length(inouts_v{}' \ x) = 4 \ \wedge$
$[min \ (hd \ (inouts_v \ (x - Suc \ 0))) \ (hd \ (tl \ (inouts_v \ (x - Suc \ 0)))) + 1,$
$min \ (hd \ (inouts_v \ (x - Suc \ 0))) \ (hd \ (tl \ (inouts_v \ (x - Suc \ 0)))) + 1,$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ x!3) \ 0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ x!3) \ 0\rceil)))] =$
$inouts_v{}' \ x) \ \wedge$
$(\neg \ 1 \leq inouts_v \ x!2 * 2 \longrightarrow$
$length(inouts_v \ x) = 4 \ \wedge$
$length(inouts_v{}' \ x) = 4 \ \wedge$
$[0, 0, real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ x!3) \ 0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (inouts_v \ x!3) \ 0\rceil)))] =$
$inouts_v{}' \ x))) \Longrightarrow$
$ok_v \longrightarrow$
$ok_v{}' \ \wedge$
$(\forall x. \ (x = 0 \longrightarrow$
$(1 \leq inouts_v \ 0!2 * 2 \longrightarrow$
$length(inouts_v \ 0) = 4 \ \wedge$
$length(inouts_v{}' \ 0) = 4 \ \wedge$
$[1, 1, real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (hd \ (drop \ 3 \ (inouts_v \ 0)))$
$0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (hd \ (drop \ 3 \ (inouts_v \ 0))) \ 0\rceil)))]$
$=$
$inouts_v{}' \ 0) \ \wedge$
$(\neg \ 1 \leq inouts_v \ 0!2 * 2 \longrightarrow$
$length(inouts_v \ 0) = 4 \ \wedge$
$length(inouts_v{}' \ 0) = 4 \ \wedge$
$[0, 0, real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (hd \ (drop \ 3 \ (inouts_v \ 0)))$
$0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (hd \ (drop \ 3 \ (inouts_v \ 0))) \ 0\rceil)))]$
$=$
$inouts_v{}' \ 0)) \ \wedge$
$(0 < x \longrightarrow$
$(1 \leq inouts_v \ x!2 * 2 \longrightarrow$
$length(inouts_v \ x) = 4 \ \wedge$
$length(inouts_v{}' \ x) = 4 \ \wedge$
$[min \ (hd \ (take \ 3 \ (inouts_v \ (x - Suc \ 0)))) \ (hd \ (tl \ (take \ 3 \ (inouts_v \ (x - Suc \ 0))))) + 1,$
$min \ (hd \ (take \ 3 \ (inouts_v \ (x - Suc \ 0)))) \ (hd \ (tl \ (take \ 3 \ (inouts_v \ (x - Suc \ 0))))) + 1,$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (hd \ (drop \ 3 \ (inouts_v \ x))) \ 0\rceil))),$
$real\text{-}of\text{-}int \ (int32 \ (RoundZero \ (real\text{-}of\text{-}int \ \lceil Rate * max \ (hd \ (drop \ 3 \ (inouts_v \ x))) \ 0\rceil)))]$
$=$
$inouts_v{}' \ x) \ \wedge$
$(\neg \ 1 \leq inouts_v \ x!2 * 2 \longrightarrow$

```
                length(inouts_v x) = 4 ∧
                length(inouts_v' x) = 4 ∧
               [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x)))
0⌉))),
                real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x))) 0⌉)))]
=
                inouts_v' x)))
            apply (clarify)
            apply (rule conjI)
            apply (clarify)
            apply (rule conjI)
            apply (clarify)
            apply (rule conjI)
            apply blast
            apply (rule conjI)
            apply blast
        apply (metis eval-nat-numeral(2) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27))
            apply (clarify)
            apply (rule conjI)
            apply blast
            apply (rule conjI)
            apply blast
        apply (metis eval-nat-numeral(2) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27))
            apply (clarify)
            apply (rule conjI)
            apply (clarify)
            apply (rule conjI)
            apply blast
            apply (rule conjI)
            apply blast
            proof −
              fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list
                  and x::nat
              assume a1: ∀ x. (x = 0 ⟶
               (1 ≤ inouts_v 0!2 * 2 ⟶
                length(inouts_v 0) = 4 ∧
                length(inouts_v' 0) = 4 ∧
                [1, 1, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉))),
                 real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉)))] =
                inouts_v' 0) ∧
               (¬ 1 ≤ inouts_v 0!2 * 2 ⟶
                length(inouts_v 0) = 4 ∧
                length(inouts_v' 0) = 4 ∧
                [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉))),
                 real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉)))] =
                inouts_v' 0)) ∧
              (0 < x ⟶
               (1 ≤ inouts_v x!2 * 2 ⟶
                length(inouts_v x) = 4 ∧
                length(inouts_v' x) = 4 ∧
                [min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1,
                 min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1,
                 real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉))),
                 real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉)))] =
                inouts_v' x) ∧
```

```
    (¬ 1 ≤ inouts_v x!2 * 2 ⟶
     length(inouts_v x) = 4 ∧
     length(inouts_v' x) = 4 ∧
     [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉))),
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉)))] =
     inouts_v' x))
  assume a2: 0 < x
  assume a3: 1 ≤ inouts_v x!(2) * 2
  from a1 have 11: ∀x. length(inouts_v x) = 4
    using a2 by blast
  have 12: hd(drop 3 (inouts_v x)) = (inouts_v x!(3))
    using 11 by (simp add: hd-drop-conv-nth)
  have 13: (hd (take 3 (inouts_v (x − Suc 0)))) = (hd (inouts_v (x − Suc 0)))
    using a1 by (metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral)
  have 14: (hd (take 3 (inouts_v (x − Suc 0)))) = (hd (inouts_v (x − Suc 0)))
    using a1 by (metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral)
  have 15: (hd (tl (take 3 (inouts_v (x − Suc 0))))) = (hd (tl (inouts_v (x − Suc 0))))
  by (metis Zero-not-Suc append-take-drop-id hd-append2 numeral-3-eq-3 take-eq-Nil take-tl)
  show [min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0)))))
+ 1,
      min (hd (take 3 (inouts_v (x − Suc 0)))) (hd (tl (take 3 (inouts_v (x − Suc 0))))) + 1,
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x))) 0⌉))),
        real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x)))
0⌉)))] =
       inouts_v' x
    using 11 12 13 14 15 by (metis a1 a2 a3)
next
  fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list
    and x::nat
  assume a1: ∀x. (x = 0 ⟶
    (1 ≤ inouts_v 0!2 * 2 ⟶
     length(inouts_v 0) = 4 ∧
     length(inouts_v' 0) = 4 ∧
     [1, 1, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉))),
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉)))] =
     inouts_v' 0) ∧
    (¬ 1 ≤ inouts_v 0!2 * 2 ⟶
     length(inouts_v 0) = 4 ∧
     length(inouts_v' 0) = 4 ∧
     [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉))),
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!3) 0⌉)))] =
     inouts_v' 0)) ∧
   (0 < x ⟶
    (1 ≤ inouts_v x!2 * 2 ⟶
     length(inouts_v x) = 4 ∧
     length(inouts_v' x) = 4 ∧
     [min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1,
      min (hd (inouts_v (x − Suc 0))) (hd (tl (inouts_v (x − Suc 0)))) + 1,
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉))),
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉)))] =
     inouts_v' x) ∧
    (¬ 1 ≤ inouts_v x!2 * 2 ⟶
     length(inouts_v x) = 4 ∧
     length(inouts_v' x) = 4 ∧
     [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉))),
```

```
          real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!3) 0⌉)))] =
         inouts_v' x))
       assume a2: 0 < x
       from a1 have 11: ∀x. length(inouts_v x) = 4
        using a2 by blast
       have 12: hd(drop 3 (inouts_v x)) = (inouts_v x!(3))
        using 11 by (simp add: hd-drop-conv-nth)
       have 13: (hd (take 3 (inouts_v (x − Suc 0)))) = (hd (inouts_v (x − Suc 0)))
        using a1 by (metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral)
       have 14: (hd (take 3 (inouts_v (x − Suc 0)))) = (hd (inouts_v (x − Suc 0)))
        using a1 by (metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral)
       have 15: (hd (tl (take 3 (inouts_v (x − Suc 0))))) = (hd (tl (inouts_v (x − Suc 0))))
       by (metis Zero-not-Suc append-take-drop-id hd-append2 numeral-3-eq-3 take-eq-Nil take-tl)
       show ¬ 1 ≤ inouts_v x!(2) * 2 ⟶
          length(inouts_v x) = 4 ∧
          length(inouts_v' x) = 4 ∧
          [0, 0, real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x)))
0⌉))),
          real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (drop 3 (inouts_v x))) 0⌉)))]
=
          inouts_v' x
         apply (clarify)
         apply (rule conjI)
         apply (simp add: 11)
         apply (rule conjI)
         using a1 a2 apply blast
         using 11 12 13 14 15
         by (simp add: a1 a2)
      qed
     qed
  qed
  have simblock-f1: SimBlock 4 4 (FBlock (λx n. True) (4) 4
   ((λx n.
      [if (x n)!2 ≥ 0.5
       then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
       if (x n)!2 ≥ 0.5
       then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
       real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉))),
       real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉)))]))
   using simblock-variableTimer1 simblock-variableTimer2
   by (metis (no-types, lifting) One-nat-def SimBlock-FBlock-parallel-comp Suc-eq-plus1
     eval-nat-numeral(2) f1-0 f1-1 numeral-code(2) semiring-norm(26) semiring-norm(27))
  have inps-f1: inps (FBlock (λx n. True) (4) 4
   ((λx n.
      [if (x n)!2 ≥ 0.5
       then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
       if (x n)!2 ≥ 0.5
       then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
       real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉))),
       real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉)))])) = 4
   using simblock-f1 using inps-P by blast
  have outps-f1: outps (FBlock (λx n. True) (4) 4
   ((λx n.
      [if (x n)!2 ≥ 0.5
       then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
```

```
        if (x n)!2 ≥ 0.5
        then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉))),
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉))))]))) = 4
    using simblock-f1 using outps-P by blast

  let ?f2-f = ((λx n.
      [if (x n)!2 ≥ 0.5
        then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
        if (x n)!2 ≥ 0.5
        then ((if n = 0 then 0 else (min (hd(x (n−1))) (hd(tl(x (n−1)))))) + 1) else 0,
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉))),
        real-of-int (int32 (RoundZero(real-of-int ⌈Rate * (max ((x n)!3) 0)⌉))))]))
  let ?f2 = (FBlock (λx n. True) (4) 4 ?f2-f)
  let ?f2-xx = (λ(inouts0::nat ⇒ real list). λna. vT-fd-sol-1
                  (λn1. hd(inouts0 n1)) (λn1. (inouts0 n1)!1) na)
  have f2: ((variableTimer1 ‖B variableTimer2) f D (0,0))
    = ?f2 f D (0,0)
    using f1 f1-0 f1-1 by auto
  have is-solution-f2: is-Solution 0 0 4 4 ?f2-f ?f2-xx
    apply (simp add: is-Solution-def)
    apply (rule allI)
    apply (simp add: f-PreFD-def)
    apply (clarify)
    using vT-fd-sol-1-is-a-solution by blast
  have unique-f2: Solvable-unique 0 0 4 4 ?f2-f
    apply (simp add: Solvable-unique-def)
    apply (rule allI, clarify, simp add: f-PreFD-def)
    apply (rule ex-ex1I)
    apply (rule-tac x = λna. vT-fd-sol-1
                        (λn1. hd(inouts0 n1)) (λn1. (inouts0 n1)!1) na in exI)
    apply (simp)
    apply (rule allI)
    using vT-fd-sol-1-is-a-solution apply (simp)
    proof −
      fix inouts0::nat ⇒ real list and xx y ::nat ⇒ real
      assume a1: ∀x. length(inouts0 x) = 3
      assume a2: ∀n. (n = 0 ⟶ (1 ≤ inouts0 0!(Suc 0) * 2 ⟶ xx 0 = 1) ∧
                        (¬ 1 ≤ inouts0 0!(Suc 0) * 2 ⟶ xx 0 = 0)) ∧
        (0 < n ⟶
        (1 ≤ inouts0 n!(Suc 0) * 2 ⟶ xx n = min (xx (n − Suc 0)) (hd (inouts0 (n − Suc 0))) +
1) ∧
        (¬ 1 ≤ inouts0 n!(Suc 0) * 2 ⟶ xx n = 0))
      assume a3: ∀n. (n = 0 ⟶ (1 ≤ inouts0 0!(Suc 0) * 2 ⟶ y 0 = 1) ∧
                        (¬ 1 ≤ inouts0 0!(Suc 0) * 2 ⟶ y 0 = 0)) ∧
        (0 < n ⟶
         (1 ≤ inouts0 n!(Suc 0) * 2 ⟶ y n = min (y (n − Suc 0)) (hd (inouts0 (n − Suc 0))) +
1) ∧
        (¬ 1 ≤ inouts0 n!(Suc 0) * 2 ⟶ y n = 0))
      have 1: ∀n. xx n = y n
        apply (rule allI)
        proof −
          fix n::nat
          show xx n = y n
            proof (induct n)
```

```
        case 0
        then show ?case
          using a2 a3 by metis
      next
        case (Suc n) note IH = this
        then show ?case
          using a2 a3 by (metis One-nat-def diff-Suc-1 zero-less-Suc)
      qed
    qed
  show xx = y
    by (simp add: 1 fun-eq)
qed
let ?f3-f = (λx na. [if 1 ≤ x na!(Suc 0) * 2
      then (if na = 0 then 0
            else min ((vT-fd-sol-1 (λn1. hd (x n1)) (λn1. x n1!(Suc 0))) (na − 1))
                 (hd (x (na − 1)))) + 1
      else 0,
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(2)) 0⌉))),
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(2)) 0⌉)))])
have f2-0:
  ?f2 f_D (0,0) =
    (FBlock (λx n. True) (4−1) (4−1)
      (λx na. ((f-PostFD 0)
      o ?f2-f
      o (f-PreFD (?f2-xx x) 0)) x na))
  using is-solution-f2 unique-f2 simblock-f1 FBlock-feedback' by blast
then have f2-1:
  ... = FBlock (λx n. True) 3 3 ?f3-f
  apply (simp (no-asm) add: f-PreFD-def f-PostFD-def)
  using f-PreFD-def
  by (metis (lifting) append.left-neutral drop-0 f-PreFD-def list.sel(1) list.sel(3) take-0)
have simblock-f2-0: SimBlock (4−1) (4−1) (?f2 f_D (0,0))
  using simblock-f1 unique-f2 Solvable-unique-is-solvable SimBlock-FBlock-feedback by blast
then have simblock-f2: SimBlock 3 3 (FBlock (λx n. True) 3 3 ?f3-f)
  by (metis (no-types, lifting) Suc-eq-plus1 add-diff-cancel-right' eval-nat-numeral(2) f2-0
      f2-1 semiring-norm(26) semiring-norm(27))
have inps-f2: inps (FBlock (λx n. True) 3 3 ?f3-f) = 3
  using simblock-f2 using inps-P by blast
have outps-f2: outps (FBlock (λx n. True) 3 3 ?f3-f) = 3
  using simblock-f2 using outps-P by blast

have f3: (((variableTimer1 ‖_B variableTimer2) f_D (0,0)) f_D (0,2))
  = (FBlock (λx n. True) 3 3 ?f3-f) f_D (0,2)
  using f2 f2-0 f2-1 by auto
let ?f3-xx = (λ(inouts_0::nat ⇒ real list). λna.
  real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_0 na!(1)) 0⌉))))
have is-solution-f3: is-Solution 0 2 3 3 ?f3-f ?f3-xx
  apply (simp add: is-Solution-def)
  apply (rule allI)
  by (simp add: f-PreFD-def)
have unique-f3: Solvable-unique 0 2 3 3 ?f3-f
  apply (simp add: Solvable-unique-def)
  apply (rule allI, clarify, simp add: f-PreFD-def)
  apply (rule ex-ex1I)
  apply (rule-tac x = λna.
```

```
    real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts0 na!(1)) 0⌉))) in exI)
  apply (simp)
  by (simp add: ext)
have simp-1: ∀ x na. (λx na. [if 1 ≤ x na!(0) * 2
      then (if na = 0 then 0
        else min (vT-fd-sol-1
          (λn1. hd (f-PreFD
            (λna. real-of-int
              (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
            0 x n1))
          (λn1. f-PreFD
            (λna. real-of-int
              (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
            0 x n1!(Suc 0))
          (na − 1))
        (hd (f-PreFD
          (λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0))
0⌉))))
          0 x (na − 1)))) +
        1
      else 0,
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))]) x na
  = (λx na. [if 1 ≤ x na!(0) * 2
      then (if na = 0 then 0
        else min (vT-fd-sol-1
          (λn1. (λna. real-of-int
            (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
          (λn1. (x n1)!(0)) (na − 1))
        ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
          (na − 1))) + 1
      else 0,
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))]) x na
  by (simp add: f-PreFD-def)
let ?f4-f = (λx na. [if 1 ≤ x na!(0) * 2
      then (if na = 0 then 0
        else min (vT-fd-sol-1
          (λn1. (λna. real-of-int
            (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
          (λn1. (x n1)!(0)) (na − 1))
        ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
          (na − 1))) + 1
      else 0,
      real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))])
have f3-0: (FBlock (λx n. True) 3 3 ?f3-f) f_D (0,2)
    = (FBlock (λx n. True) (3−1) (3−1)
      (λx na. ((f-PostFD 2)
      o ?f3-f
      o (f-PreFD (?f3-xx x) 0)) x na))
  using is-solution-f3 unique-f3 simblock-f2 FBlock-feedback' by blast
then have f3-1: ... = FBlock (λx n. True) 2 2 ?f4-f
  apply (simp (no-asm) add: f-PreFD-def f-PostFD-def)
  by (simp add: simp-1)
have simblock-f3-0: SimBlock (3−1) (3−1) ((FBlock (λx n. True) 3 3 ?f3-f) f_D (0,2))
  using simblock-f2 unique-f3 Solvable-unique-is-solvable SimBlock-FBlock-feedback by blast
then have simblock-f3: SimBlock 2 2 (FBlock (λx n. True) 2 2 ?f4-f)
```

```
    by (metis (no-types, lifting) One-nat-def Suc-1 diff-Suc-1 f3-0 f3-1 numeral-3-eq-3)

  have simp-f4: ∀ x n. (f-RopGT ∘ ?f4-f) x n = ?vt-f x n
    using f-RopGT-def by simp
  have f4: variableTimer = (FBlock (λx n. True) 2 2 ?f4-f) ; ; RopGT
    using f3 f3-0 f3-1 variableTimer-def by auto
  then have f4-0: ... = FBlock (λx n. True) 2 1 (f-RopGT ∘ ?f4-f)
    using simblock-f3 SimBlock-RopGT FBlock-seq-comp by (simp add: RopGT-def)
  then have f4-1: ... = FBlock (λx n. True) 2 1 ?vt-f
    using simp-f4 by presburger
  show ?thesis
    using f4 f4-0 f4-1 by auto
qed
```

C.1.1 Verification

vt-req-00: if *door_open* is false (door is closed), then the output of this subsystem is false. This is not a requirement described in the paper but we believe it should hold for this subsystem.

Current Simulink diagram cannot guarantee this property because the type conversion int32 could cause its output less than 0 (i.e. 4294967295 = -10), finally the output of *variableTimer* could be true. It violates our requirement. In the original Simulink block diagram, this *variableTimer* is a subsystem of *post-landing-finalize* which itself is a subsystem of aircraft cabin pressure and environment control system applications. Therefore, its second input ($door_open_time$) relies on the outputs of other subsystem (Timing Computation), and *variableTimer* actually makes assumptions on its input.

However, taking *variableTimer* alone, we try to verify this property either strengthen its precondition on the input ($door_open_times$ is always larger or equal to 0 and less than $2147483647/Rate$), or change int32 to uint32 for the type conversion block, or change the data type of this input t unsigned integer.

In the lemma below, we proved this property holds if we make an assumption on its values.

```
lemma vt-req-00:
  ((∀ n::nat ·
    «(λx n. (hd(x n) = 0 ∨ hd(x n) = 1) ∧ (∗ the first input door-open is boolean. ∗)
      (hd(tl(x n)) ≥ 0 ∧ hd(tl(x n)) < 214748364))»
    (&inouts)_a («n»)_a)::sim-state upred)
  ⊢_n
  ((∀ n::nat ·
    ((#_u($inouts («n»)_a)) =_u «2») ∧
    ((#_u($inouts´ («n»)_a)) =_u «1») ∧
    (head_u(($inouts («n»)_a)) =_u 0) ⇒ (head_u(($inouts´ («n»)_a)) =_u 0))
  ) ⊑ variableTimer
 apply (simp (no-asm) add: variableTimer-simp)
 apply (simp add: FBlock-def)
 apply (rel-simp)
 proof −
  fix ok_v::bool and inouts_v::nat ⇒ real list and ok_v'::bool and inouts_v' ::nat ⇒ real list
      and x :: nat
  assume a1: ∀ x. (hd (inouts_v x) = 0 ∨ hd (inouts_v x) = 1) ∧
      (0 ≤ hd (tl (inouts_v x)) ∧ hd (tl (inouts_v x)) < 214748364)
  assume a2: hd (inouts_v x) = 0
  assume a3: ∀ x. (x = 0 ⟶
        (1 ≤ inouts_v 0!(0) ∗ 2 ⟶
```

```
          (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 1 ⟶
           length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
          (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 1 ⟶
           length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0)) ∧
         (¬ 1 ≤ inouts_v 0!(0) * 2 ⟶
          (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 0 ⟶
           length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
          (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 0 ⟶
           length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0))) ∧
        (0 < x ⟶
         (1 ≤ inouts_v x!(0) * 2 ⟶
          (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
           < min (vT-fd-sol-1
                   (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0))
0⌉))))
                   (λn1. inouts_v n1!(0)) (x − Suc 0))
              (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0))
0⌉)))) +
            1 ⟶
           length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [1] = inouts_v' x) ∧
          (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
             < min (vT-fd-sol-1
                     (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0))
0⌉))))
                     (λn1. inouts_v n1!(0)) (x − Suc 0))
                (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0))
0⌉)))) +
              1 ⟶
           length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)) ∧
         (¬ 1 ≤ inouts_v x!(0) * 2 ⟶
          (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
           length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [1] = inouts_v' x) ∧
          (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
           length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)))
  have 1: ∀x. length(inouts_v x) = 2
    using a3 neq0-conv by blast
  have 2: inouts_v x!(0) = 0
   using 1 a2 by (metis hd-conv-nth list.size(3) zero-not-eq-two)
  have 3: ∀x. (0 ≤ inouts_v x!(Suc 0) ∧ inouts_v x!(Suc 0) < 214748364)
   using a1
   by (metis 1 One-nat-def diff-Suc-1 hd-conv-nth length-greater-0-conv length-tl
     less-numeral-extra(1) nth-tl numeral-2-eq-2)
  have 30: ∀x. Rate * max (inouts_v x!(Suc 0)) 0 < Rate * 214748364 ∧
         Rate * max (inouts_v x!(Suc 0)) 0 ≥ 0
   using 3 by simp
  have ∀x. ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉ < (Rate * max (inouts_v x!(Suc 0)) 0 + 1)
   using ceiling-correct by linarith
  then have ∀x. ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉ < (Rate * 214748364 + 1)
   using 30 by (metis add.commute cancel-ab-semigroup-add-class.add-diff-cancel-left'
     ceiling-less-iff less-eq-real-def numeral-times-numeral of-int-numeral one-plus-numeral)
  then have 31: ∀x. ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉ < (Rate * 214748364 + 1) ∧
         ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉ ≥ 0
   using 30 by (smt ceiling-le-zero ceiling-zero)
  have 32: ∀x. real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉ < (Rate * 214748364 + 1) ∧
         real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉ ≥ 0
```

```
    using 31 by (simp)
  have 33: ∀x. RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)
            = ⌊real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉⌋
    using RoundZero-def by (simp)
  have 34: ∀x. RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉) < (Rate * 214748364 +
1) ∧
          RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉) ≥ 0
    using 33 31 by auto
  have 35: ∀x. int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉))
     =  RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)
    using 34 int32-eq by smt
  have 36: ∀x. int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉))
            < (Rate * 214748364 + 1) ∧
          int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) ≥ 0
    using 35 34 by (simp)
  show hd (inouts_v' x) = 0
    using a2 a3 36 2
    by (metis (no-types, lifting) less-numeral-extra(1) list.sel(1) mult-zero-left neq0-conv not-le)
 qed

lemma door-open-time-range:
 fixes x :: real and door-open-time::real
 assumes door-open-time < 214748364 ∧ door-open-time > 0
 assumes (0 ≤ x ∧ x < door-open-time)
 shows int32 (RoundZero (real-of-int ⌈Rate * max x 0⌉)) ≥ 0 ∧
       int32 (RoundZero (real-of-int ⌈Rate * max x 0⌉)) < (Rate * door-open-time + 1)
 proof −
  have 0: Rate * max x 0 < Rate * door-open-time ∧ Rate * max x 0 ≥ 0
    using assms by simp
  have 1: ⌈Rate * max x 0⌉ < (Rate * max x 0 + 1)
    using ceiling-correct by linarith
  then have ⌈Rate * max x 0⌉ < (Rate * door-open-time + 1)
    using 0 assms by linarith
  then have 2: ⌈Rate * max x 0⌉ < (Rate * door-open-time + 1) ∧
          ⌈Rate * max x 0⌉ ≥ 0
    using 0 by (smt ceiling-le-zero ceiling-zero)
  have 3: real-of-int ⌈Rate * max x 0⌉ < (Rate * door-open-time + 1) ∧
          real-of-int ⌈Rate * max x 0⌉ ≥ 0
    using 2 by (simp)
  have 4: RoundZero (real-of-int ⌈Rate * max x 0⌉)
            = ⌊real-of-int ⌈Rate * max x 0⌉⌋
    using RoundZero-def by (simp)
  have 5: RoundZero (real-of-int ⌈Rate * max x 0⌉) < (Rate * door-open-time + 1) ∧
          RoundZero (real-of-int ⌈Rate * max x 0⌉) ≥ 0
    using 3 4 by auto
  have 51: RoundZero (real-of-int ⌈Rate * max x 0⌉) < (Rate * 214748364 + 1) ∧
          RoundZero (real-of-int ⌈Rate * max x 0⌉) ≥ 0
    using 5 assms by auto
  have 6: int32 (RoundZero (real-of-int ⌈Rate * max x 0⌉))
     =  RoundZero (real-of-int ⌈Rate * max x 0⌉)
    using 51 int32-eq assms by simp
  have 7: int32 (RoundZero (real-of-int ⌈Rate * max x 0⌉))
            < (Rate * door-open-time + 1) ∧
          int32 (RoundZero (real-of-int ⌈Rate * max x 0⌉)) ≥ 0
    using 5 6 by (simp)
```

show *?thesis*
using *7* **by** *blast*
qed

C.2 Subsystem: *rise1Shot*

The *rise1Shot* subsystem is used for the purpose of making sure the finalize event is only triggered by once if doors are continuously open.

definition *rise1Shot* ≡
(*Split2* ;; (*Id* ‖$_B$ (*UnitDelay 1.0* (∗*3*∗);; *LopNOT* (∗*4*∗))) ;; *LopAND 2* (∗*Rise-1*∗))

rise1Shot-simp-pat-f gives the function definition of the finally simplified subsystem.

abbreviation *rise1Shot-simp-pat-f* ≡ (λ*x n*. [*if* (*hd*(*x n*) ≠ *0* ∧ (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) = *0*)) *then 1 else 0*])

rise1Shot-simp-pat is the simplified block for the subsystem.

abbreviation *rise1Shot-simp-pat* ≡ (*FBlock* (λ*x n*. *True*) *1 1 rise1Shot-simp-pat-f*)

lemma *SimBlock-rise1Shot-simp*:
SimBlock 1 1 rise1Shot-simp-pat
apply (*rule SimBlock-FBlock*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
apply (*rule-tac x* = λ*na*. [*0*] **in** *exI*)
apply (*simp*)
by *simp*

rise1Shot-simp simplifies the subsystem into a block.

lemma *rise1Shot-simp*:
rise1Shot = *rise1Shot-simp-pat*
proof −

have *f1*: (*UnitDelay 1.0* (∗*3*∗);; *LopNOT* (∗*4*∗)) = *FBlock* (λ*x n*. *True*) *1 1* (*f-LopNOT* ∘ *f-UnitDelay 1*)
using *SimBlock-LopNOT SimBlock-UnitDelay* **by** (*simp add*: *FBlock-seq-comp f-sim-blocks*)
have *simblock-f1*: *SimBlock 1 1* (*FBlock* (λ*x n*. *True*) *1 1* (*f-LopNOT* ∘ *f-UnitDelay 1*))
by (*metis* (*no-types*, *lifting*) *LopNOT-def SimBlock-LopNOT SimBlock-FBlock-seq-comp SimBlock-UnitDelay UnitDelay-def f1*)

have *f2*: (*Id* ‖$_B$ (*UnitDelay 1.0* (∗*3*∗);; *LopNOT* (∗*4*∗)))
= (*Id* ‖$_B$ *FBlock* (λ*x n*. *True*) *1 1* (*f-LopNOT* ∘ *f-UnitDelay 1*))
using *f1* **by** (*simp*)
then have *f2-0*: ...
= (*FBlock* (λ*x n*. *True*) *2 2* (λ*x n*. (((*f-Id* ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*)))
using *simblock-f1 SimBlock-Id FBlock-parallel-comp f1*
proof −
have ⋀*n na f*. ¬ *SimBlock n na* (*FBlock* (λ*f n*. *True*) *n na f*) ∨ *FBlock* (λ*f n*. *True*) (*n* + *1*) (*na* + *1*) (λ*fa na*. (*f* ∘ (λ*f na*. *take n* (*f na*))) *fa na* • (*f-LopNOT* ∘ *f-UnitDelay 1* ∘ (λ*f na*. *drop n* (*f na*))) *fa na*) = *FBlock* (λ*f n*. *True*) *n na f* ‖$_B$ *FBlock* (λ*f n*. *True*) *1 1* (*f-LopNOT* ∘ *f-UnitDelay 1*)
using *FBlock-parallel-comp simblock-f1* **by** *presburger*
then have ¬ *SimBlock 1 1 simu-contract-real.Id* ∨ *FBlock* (λ*f n*. *True*) (*1* + *1*) (*1* + *1*) (λ*f n*. (*f-Id* ∘ (λ*f n*. *take 1* (*f n*))) *f n* • (*f-LopNOT* ∘ *f-UnitDelay 1* ∘ (λ*f n*. *drop 1* (*f n*))) *f n*) = *FBlock* (λ*f n*. *True*) *1 1 f-Id* ‖$_B$ *FBlock* (λ*f n*. *True*) *1 1* (*f-LopNOT* ∘ *f-UnitDelay 1*)
using *simu-contract-real.Id-def* **by** *presburger*

then show *?thesis*
by (*metis* (*no-types*) *SimBlock-Id Suc-1 Suc-eq-plus1 simu-contract-real.Id-def*)
qed
have *simblock-f2*: *SimBlock 2 2*
(*FBlock* (λ*x n. True*) *2 2* (λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)))
by (*metis* (*no-types*, *lifting*) *SimBlock-Id SimBlock-FBlock-parallel-comp Suc-1 Suc-eq-plus1 f2-0 simblock-f1 simu-contract-real.Id-def*)

have *f3*: *Split2* ; ; (*Id* ‖$_B$ (*UnitDelay 1.0* (∗*3*∗); ; *LopNOT* (∗*4*∗)))
= *Split2* ; ; (*FBlock* (λ*x n. True*) *2 2* (λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)))
using *f2 f2-0* **by** (*simp*)
then have *f3-0*: ... = (*FBlock* (λ*x n. True*) *1 2*
((λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)) *o f-Split2*))
using *SimBlock-Split2 simblock-f2* **by** (*simp add*: *FBlock-seq-comp f-sim-blocks*)
have *simblock-f3*: *SimBlock 1 2* (*FBlock* (λ*x n. True*) *1 2*
((λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)) *o f-Split2*))
by (*smt SimBlock-FBlock-seq-comp SimBlock-Split2 Split2-def f3-0 simblock-f2*)

have *f4*: (*Split2* ; ; (*Id* ‖$_B$ (*UnitDelay 1.0* (∗*3*∗); ; *LopNOT* (∗*4*∗))) ; ; *LopAND 2* (∗*Rise-1*∗))
= (*FBlock* (λ*x n. True*) *1 2*
((λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)) *o f-Split2*))
; ; *LopAND 2* (∗*Rise-1*∗)
using *f3 f3-0*
by (*smt LopAND-def FBlock-seq-comp SimBlock-LopAND SimBlock-FBlock-seq-comp SimBlock-Split2*

Split2-def comp-assoc f1 f2-0 neq0-conv simblock-f2 zero-not-eq-two)
have *f4-0*: ... = (*FBlock* (λ*x n. True*) *1 1*
(*f-LopAND o* (λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)) *o f-Split2*))
using *SimBlock-LopAND simblock-f3* **by** (*simp add*: *LopAND-def FBlock-seq-comp comp-assoc*)
have ∀ *x n.* (*f-LopAND o* (λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)) *o f-Split2*) *x n*
= ((λ*x n.* [*if* (*hd*(*x n*) ≠ *0* ∧ (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) = *0*)) *then 1 else 0*])) *x n*
using *f-Id-def f-LopNOT-def f-UnitDelay-def f-LopAND-def f-Split2-def* **by** *simp*
then have (*f-LopAND o* (λ*x n.* (((*f-Id* ∘ (λ*xx nn. take 1* (*xx nn*))) *x n*) •
(((*f-LopNOT* ∘ *f-UnitDelay 1*) ∘ (λ*xx nn. drop 1* (*xx nn*)))) *x n*)) *o f-Split2*)
= ((λ*x n.* [*if* (*hd*(*x n*) ≠ *0* ∧ (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) = *0*)) *then 1 else 0*]))
by *blast*
then have *f4-1*: (*Split2* ; ; (*Id* ‖$_B$ (*UnitDelay 1.0* (∗*3*∗); ; *LopNOT* (∗*4*∗))) ; ; *LopAND 2* (∗*Rise-1*∗)) =
(*FBlock* (λ*x n. True*) *1 1* (λ*x n.* [*if* (*hd*(*x n*) ≠ *0* ∧ (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) = *0*)) *then 1 else 0*]))
using *f4 f4-0* **by** (*simp*)
then show *?thesis*
by (*simp add*: *rise1Shot-def*)
qed

C.2.1 Verification

rise1shot-req-00 states that if the output of *rise1Shot* is true, then its present input must be true and the previous input must be false. In other word, the inputs that are continuously true won't trigger the output again.

lemma *rise1shot-req-00*:
((∀ *n*::*nat* · (
«(λ*x n*. (*hd*(*x n*) = *0* ∨ *hd*(*x n*) = *1*))» (&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
⊢$_n$
((∀ *n*::*nat* ·
((#$_u$($*inouts* («*n*»)$_a$)) =$_u$ «*1*») ∧
((#$_u$($*inouts*´ («*n*»)$_a$)) =$_u$ «*1*») ∧
(*head*$_u$(($*inouts*´ («*n*»)$_a$)) =$_u$ *1*) ⇒
(«*n*» >$_u$ *0* ∧ *head*$_u$(($*inouts* («*n*»)$_a$)) =$_u$ *1* ∧ *head*$_u$(($*inouts* («*n*−*1*»)$_a$)) =$_u$ *0*))
)) ⊑ *rise1Shot*
apply (*simp* (*no-asm*) *add*: *rise1Shot-simp*)
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
by (*metis list.sel*(*1*) *neq0-conv zero-neq-one*)

C.3 Subsystem: Latch

This subsystem implements a SR AND-OR latch and it has two inputs: 1st is S (set) and 2nd is R (reset)

The first output is fed back into the first input.

definition *latch* ≡
((((*UnitDelay 0* (∗*3*∗) ‖$_B$ *Id*) ; ; (*LopOR 2* (∗*1*∗)))
‖$_B$
(*Id* ; ; *LopNOT* (∗*2*∗))
) ; ; (*LopAND 2*) (∗*Latch-1*∗) ; ; *Split2*
) *f*$_D$ (*0*,*0*)

latch-rec-calc-output is the solution for the feedback.

fun *latch-rec-calc-output*:: (*nat* ⇒ *real*) ⇒ (*nat* ⇒ *real*) ⇒ *nat* ⇒ *real* **where**
latch-rec-calc-output S R 0 =
(*if R 0* = *0 then* (*if S 0* = *0 then 0 else 1.0*) *else 0*) |
latch-rec-calc-output S R (*Suc n*) =
(*if R* (*Suc n*) = *0 then* (*if S* (*Suc n*) = *0 then* (*latch-rec-calc-output S R* (*n*)) *else 1.0*) *else 0*)

lemma *latch-rec-calc-output-0-1*:
latch-rec-calc-output S R n = *0* ∨ *latch-rec-calc-output S R n* = *1*
proof (*induction n*)
case *0*
then show *?case* **by** (*simp*)
next
case (*Suc n*)
then show *?case* **by** (*simp*)
qed

lemma *latch-rec-calc-output-is-a-solution*:
fixes *inouts*$_0$::*nat* ⇒ *real list* **and** *n*::*nat*
assumes *a1*: ∀ *x*. *length*(*inouts*$_0$ *x*) = *2*

shows ((*0* < *n* ∧ ¬ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*) = *0* ∨ ¬ *hd* (*inouts*$_0$ *n*) = *0*) ∧ *inouts*$_0$ *n*!(*Suc 0*) = *0* ⟶ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) *n* = *1*) ∧ ((*n* = *0* ∨ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*) = *0*) ∧ *hd* (*inouts*$_0$ *n*) = *0* ⟶ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) *n* = *0*) ∧ (¬ *inouts*$_0$ *n*!(*Suc 0*) = *0* ⟶ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) *n* = *0*)
apply (*rule conjI*)
apply (*clarify*)
proof −
assume *a2*: *0* < *n* ∧ ¬ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*) = *0* ∨ ¬ *hd* (*inouts*$_0$ *n*) = *0*
assume *a3*: *inouts*$_0$ *n*!(*Suc 0*) = *0*
show *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) *n* = *1*
proof (*cases*)
assume *a4*: *0* < *n* ∧ ¬ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*) = *0*
from *a4* **have** *1*: *n* > *0*
by *blast*
have *11*: *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) *n* = *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*Suc* (*n* − *Suc 0*))
using *1* **by** *simp*
show *?thesis*
proof (*cases*)
assume *a5*: *hd* (*inouts*$_0$ *n*) = *0*
from *11* **have** *12*: *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*Suc* (*n* − *Suc 0*)) = *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*)
using *a3 a5* **apply** (*simp* (*no-asm*))
by (*simp add*: *1*)
show *?thesis*
using *a4 latch-rec-calc-output-0-1* **using** *12* **by** *auto*
next
assume *a5*: ¬*hd* (*inouts*$_0$ *n*) = *0*
then have *12*: *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*Suc* (*n* − *Suc 0*)) = *1*
using *a3 a5* **apply** (*simp* (*no-asm*))
by (*simp add*: *1*)
show *?thesis*
using *a4* **using** *12* **by** *auto*
qed
next
assume *a4*: ¬ (*0* < *n* ∧ ¬ *latch-rec-calc-output* (λ*n1*. *hd* (*inouts*$_0$ *n1*)) (λ*n1*. *inouts*$_0$ *n1*!(*Suc 0*)) (*n* − *Suc 0*) = *0*)
then have *1*: ¬ *hd* (*inouts*$_0$ *n*) = *0*
using *a2* **by** *blast*
show *?thesis*
proof (*cases*)
assume *a5*: *n* = *0*
show *?thesis*
using *a5* **apply** (*simp*)

```
      using 1 a3 by blast
    next
      assume a5: ¬n = 0
      then have a5': n > 0
        by simp
      have 11: latch-rec-calc-output (λn1. hd (inouts0 n1)) (λn1. inouts0 n1!(Suc 0)) n =
        latch-rec-calc-output (λn1. hd (inouts0 n1)) (λn1. inouts0 n1!(Suc 0)) (Suc (n − Suc 0))
        using a5' by simp
      show ?thesis
        apply (simp only: 11)
        apply (simp)
        using 1 a3 by (simp add: a5')
    qed
  qed
next
  show ((n = 0 ∨ latch-rec-calc-output (λn1. hd (inouts0 n1)) (λn1. inouts0 n1!(Suc 0)) (n − Suc
0) = 0) ∧ hd (inouts0 n) = 0 ⟶
    latch-rec-calc-output (λn1. hd (inouts0 n1)) (λn1. inouts0 n1!(Suc 0)) n = 0) ∧
   (¬ inouts0 n!(Suc 0) = 0 ⟶ latch-rec-calc-output (λn1. hd (inouts0 n1)) (λn1. inouts0 n1!(Suc
0)) n = 0)
    proof (cases)
      assume a4: n = 0
      then show ?thesis
        by simp
    next
      assume a4: ¬ n = 0
      then have a4': n > 0
        by simp
      show ?thesis
        apply (rule conjI, clarify)
        apply (metis Suc-pred a4 a4' latch-rec-calc-output.simps(2))
        using a4 a4' less-imp-Suc-add by fastforce
    qed
  qed

abbreviation latch-simp-pat-f ≡ (λx na. [if (0 < na ∧
          ¬ latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (na − Suc 0) = 0
          ∨ ¬ hd (x na) = 0) ∧ x na!(Suc 0) = 0
         then 1 else 0])

abbreviation latch-simp-pat-f' ≡ (λx na. [
          latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (na)])

lemma latch-simp-pat-f-eq:
  latch-simp-pat-f = latch-simp-pat-f'
  proof −
    have 1: ∀ x na. latch-simp-pat-f x na = latch-simp-pat-f' x na
      apply (rule allI)+
      apply (induct-tac na)
      proof −
        fix x na
       have 1: [(if (0 < 0 ∧ ¬ latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (0 − Suc 0)
= 0 ∨
                  ¬ hd (x 0) = 0) ∧
                 x 0!(Suc 0) = 0
```

```
            then 1 else 0)] = [(if ¬ hd (x 0) = 0 ∧ x 0!(Suc 0) = 0 then 1 else 0)]
        by (simp)
      have 2: [latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) 0] =
            [(if ¬ hd (x 0) = 0 ∧ x 0!(Suc 0) = 0 then 1 else 0)]
        by (simp)
      show [if (0 < 0 ∧ ¬ latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (0 − Suc 0) =
0 ∨
                ¬ hd (x 0) = 0) ∧
              x 0!(Suc 0) = 0
             then 1 else 0] =
            [latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) 0]
        using 1 2 by (simp)
    next
      fix x na n
      assume a1: [if (0 < n ∧
        ¬ latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (n − Suc 0) = 0 ∨
            ¬ hd (x n) = 0) ∧ x n!(Suc 0) = 0
          then 1 else 0] =
        [latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) n]
      show [if (0 < Suc n ∧ ¬ latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (Suc n −
Suc 0) = 0 ∨
              ¬ hd (x (Suc n)) = 0) ∧
            x (Suc n)!(Suc 0) = 0
          then 1 else 0] =
        [latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (Suc n)]
        using a1 latch-rec-calc-output-0-1 by force
    qed
  show ?thesis
    using 1 by simp
qed

abbreviation latch-simp-pat ≡ FBlock (λx n. True) 2 1 latch-simp-pat-f

lemma SimBlock-latch-simp:
  SimBlock 2 1 latch-simp-pat
apply (rule SimBlock-FBlock)
apply (rule-tac x = λna. [0, 1] in exI)
apply (rule-tac x = λna. [0] in exI)
apply (simp)
by simp

abbreviation latch-simp-pat' ≡ FBlock (λx n. True) 2 1 latch-simp-pat-f'

lemma SimBlock-latch-simp':
  SimBlock 2 1 latch-simp-pat'
using SimBlock-latch-simp latch-simp-pat-f-eq
by simp

lemma latch-simp:
latch = latch-simp-pat'
proof −

  have f1: (UnitDelay 0 (∗3∗) ‖B Id) = (FBlock (λx n. True) (2) (2)
     (λx n. [if n = 0 then 0 else hd(x (n−1)), hd(tl(x n))]))
    using UnitDelay-Id-parallel-comp by (simp)
```

have *simblock-f1*: *SimBlock 2 2* (*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))]))
by (*metis* (*no-types*, *lifting*) *SimBlock-Id SimBlock-FBlock-parallel-comp SimBlock-UnitDelay Suc-1 Suc-eq-plus1 UnitDelay-Id-parallel-comp UnitDelay-def Id-def*)

have *f2*: ((*UnitDelay 0* (∗*3*∗) ‖$_B$ *Id*) ; ; (*LopOR 2* (∗*1*∗))) = (*FBlock* (λ*x n*. *True*) (*2*) (*2*)
(λ*x n*. [*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))])) ; ; (*LopOR 2* (∗*1*∗))
by (*simp add*: *UnitDelay-Id-parallel-comp*)
have *f2-0*: ... = *FBlock* (λ*x n*. *True*) (*2*) (*1*)
(*f-LopOR o* (λ*x n*. [*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))]))
using *LopOR-def FBlock-seq-comp SimBlock-LopOR simblock-f1* **by** *auto*
have *f2-1*: ... = *FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*])
proof −
have ∀ *x n*. ((*f-LopOR o* (λ*x n*. [*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *hd*(*tl*(*x n*))])) *x n*
= (λ*x n*. [*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*]) *x n*)
using *f-LopOR-def* **by** *auto*
then show *?thesis*
by *presburger*
qed
have *simblock-f2*: *SimBlock 2 1* (*FBlock* (λ*x n*. *True*) (*2*) (*1*)
(λ*x n*. [*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*]))
by (*metis* (*no-types*, *lifting*) *LopOR-def SimBlock-LopOR SimBlock-FBlock-seq-comp f2-0 f2-1 pos2 simblock-f1*)

have *f3*: (*Id* ; ; *LopNOT* (∗*2*∗)) = (*FBlock* (λ*x n*. *True*) (*1*) (*1*) (*f-LopNOT o f-Id*))
by (*metis LopNOT-def One-nat-def FBlock-seq-comp SimBlock-Id SimBlock-LopNOT simu-contract-real.Id-def*)
then have *f3-0*: ... = (*FBlock* (λ*x n*. *True*) (*1*) (*1*)
(λ*x n*. [*if hd*(*x n*) = *0 then 1 else 0*]))
proof −
have ∀ *x n*. ((*f-LopNOT o f-Id*) *x n* = (λ*x n*. [*if hd*(*x n*) = *0 then 1 else 0*]) *x n*)
by (*simp add*: *f-Id-def f-LopNOT-def*)
then show *?thesis*
by *presburger*
qed
have *simblock-f3*: *SimBlock 1 1* (*FBlock* (λ*x n*. *True*) (*1*) (*1*)
(λ*x n*. [*if hd*(*x n*) = *0 then 1 else 0*]))
by (*metis LopNOT-def SimBlock-Id SimBlock-LopNOT SimBlock-FBlock-seq-comp f3 f3-0 Id-def*)

let *?P* = (λ*x n*. [*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*])
let *?Q* = (λ*x n*. [*if hd*(*x n*) = *0 then 1 else 0*])
have *f4*: (((*UnitDelay 0* (∗*3*∗) ‖$_B$ *Id*) ; ; (*LopOR 2* (∗*1*∗))) ‖$_B$ (*Id* ; ; *LopNOT* (∗*2*∗)))
= (*FBlock* (λ*x n*. *True*) (*2*) (*1*) *?P*) ‖$_B$ (*FBlock* (λ*x n*. *True*) (*1*) (*1*) *?Q*)
using *f2 f2-0 f2-1 f3 f3-0* **by** *auto*
then have *f4-0*: ... = *FBlock* (λ*x n*. *True*) (*2*+*1*) (*1*+*1*)
(λ*x n*. (((*?P* ∘ (λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*))
using *SimBlock-UnitDelay SimBlock-Id SimBlock-LopOR SimBlock-LopNOT simblock-f1 simblock-f2 simblock-f3*
by (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
then have *f4-1*: ... = *FBlock* (λ*x n*. *True*) *3 2*
(λ*x n*. (((*?P* ∘ (λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*))
using *Suc-eq-plus1 nat-1-add-1 numeral-2-eq-2 numeral-3-eq-3* **by** *presburger*

have *f4-2*: *FBlock* (λ*x n*. *True*) *3 2*
(λ*x n*. (((*?P* ∘ (λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*))
= *FBlock* (λ*x n*. *True*) *3 2*
(λ*x n*. ([*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*,
if (*x n*)!*2* = *0 then 1 else 0*]))
proof −
have *1*: ∀(*x*::*nat* ⇒ *real list*) *n*::*nat*. *length*(*x n*) > *2* ⟶
(((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*
= (λ*x n*. [*if* (*x n*)!*2* = *0 then 1 else 0*]) *x n*)
apply (*auto*)
apply (*simp add*: *hd-drop-conv-nth*)
by (*simp add*: *hd-drop-conv-nth*)
have *2*: ∀(*x*::*nat* ⇒ *real list*) *n*::*nat*. ((λ*x n*. (((*?P* ∘ (λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*)) *x n*
= (λ*x n*. (((λ*x n*. [*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*]) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*)) *x n*)
apply (*auto*)
apply (*metis append-take-drop-id hd-append2 take-eq-Nil zero-not-eq-two*)
apply (*metis Suc-1 append-take-drop-id hd-append2 take-eq-Nil take-tl zero-neq-one*)
apply (*metis Suc-1 append-take-drop-id hd-append2 take-eq-Nil take-tl zero-neq-one*)
apply (*metis Suc-1 hd-conv-nth less-numeral-extra*(*1*) *nth-take take-eq-Nil take-tl zero-neq-one*)
apply (*metis Suc-1 append-take-drop-id hd-append2 take-eq-Nil take-tl zero-neq-one*)
apply (*metis append-take-drop-id hd-append2 take-eq-Nil zero-not-eq-two*)
by (*metis Suc-1 append-take-drop-id hd-append2 take-eq-Nil take-tl zero-neq-one*)
have *3*: ∀(*x*::*nat* ⇒ *real list*) *n*::*nat*. *length*(*x n*) > *2* ⟶
((λ*x n*. (((λ*x n*. [*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*]) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*)) *x n*
= (λ*x n*. ([*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*,
if (*x n*)!*2* = *0 then 1 else 0*])) *x n*)
using *hd-drop-m* **by** *simp*
have *4*: ∀(*x*::*nat* ⇒ *real list*) *n*::*nat*. *length*(*x n*) > *2* ⟶
((λ*x n*. (((*?P* ∘ (λ*xx nn*. *take 2* (*xx nn*))) *x n*)
• ((*?Q* ∘ (λ*xx nn*. *drop 2* (*xx nn*)))) *x n*)) *x n*
= (λ*x n*. ([*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0 then 1*::*real else 0*,
if (*x n*)!*2* = *0 then 1 else 0*])) *x n*)
using *1 2* **by** *simp*
show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
apply (*rule iffI*)
apply (*clarify*)
defer
apply (*clarify*)
defer
proof −
fix ok_v $inouts_v$::*nat* ⇒ *real list* **and** ok_v' $inouts_v'$::*nat* ⇒ *real list* **and** *x*::*nat*
assume *a1*: ∀*x*. (*hd* (*drop 2* ($inouts_v$ *x*)) = *0* ⟶
(*0* < *x* ∧ ¬ *hd* (*take 2* ($inouts_v$ (*x* − *Suc 0*))) = *0* ⟶ *length*($inouts_v$ *x*) = *3* ∧ *length*($inouts_v'$ *x*) = *2* ∧ [*1*, *1*] = $inouts_v'$ *x*) ∧
(¬ *hd* (*tl* (*take 2* ($inouts_v$ *x*))) = *0* ⟶ *length*($inouts_v$ *x*) = *3* ∧ *length*($inouts_v'$ *x*) = *2* ∧ [*1*, *1*] = $inouts_v'$ *x*) ∧
((*x* = *0* ∨ *hd* (*take 2* ($inouts_v$ (*x* − *Suc 0*))) = *0*) ∧ *hd* (*tl* (*take 2* ($inouts_v$ *x*))) = *0* ⟶
length($inouts_v$ *x*) = *3* ∧ *length*($inouts_v'$ *x*) = *2* ∧ [*0*, *1*] = $inouts_v'$ *x*)) ∧
(¬ *hd* (*drop 2* ($inouts_v$ *x*)) = *0* ⟶

$(0 < x \wedge \neg\ hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 0] = inouts_v{}'\ x) \wedge$
$(\neg\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 0] = inouts_v{}'\ x) \wedge$
$((x = 0 \vee hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = 0) \wedge hd\ (tl\ (take\ 2\ (inouts_v\ x))) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x))$
from *a1* **have** *len-3*: $\forall\, na.\ length(inouts_v\ na) = 3$
by (*meson neq0-conv*)
from *len-3* **have** *hd-drop*: $(hd\ (drop\ 2\ (inouts_v\ x)) = inouts_v\ x!(2))$
by (*simp add*: *hd-drop-conv-nth*)
have *hd-take*: $hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = hd\ (inouts_v\ (x - Suc\ 0))$
by (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *hd-tl-take*: $hd\ (tl\ (take\ 2\ (inouts_v\ x))) = hd\ (tl\ (inouts_v\ x))$
by (*metis Suc-1 hd-conv-nth less-numeral-extra(1) nth-take take-eq-Nil take-tl zero-neq-one*)
show $(inouts_v\ x!(2) = 0 \longrightarrow$
$(0 < x \wedge \neg\ hd\ (inouts_v\ (x - Suc\ 0)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 1] = inouts_v{}'\ x) \wedge$
$(\neg\ hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 1] = inouts_v{}'\ x) \wedge$
$((x = 0 \vee hd\ (inouts_v\ (x - Suc\ 0)) = 0) \wedge hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 1] = inouts_v{}'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 0 \longrightarrow$
$(0 < x \wedge \neg\ hd\ (inouts_v\ (x - Suc\ 0)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 0] = inouts_v{}'\ x) \wedge$
$(\neg\ hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 0] = inouts_v{}'\ x) \wedge$
$((x = 0 \vee hd\ (inouts_v\ (x - Suc\ 0)) = 0) \wedge hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x))$
using *a1 hd-drop hd-take hd-tl-take* **by** *presburger*
next
fix ok_v::*bool* **and** $inouts_v$::*nat* ⇒ *real list* **and** $ok_v{}'$::*bool* **and** $inouts_v{}'$::*nat* ⇒ *real list* **and** *x*::*nat*
assume *a1*: $(\forall\, x.\ (inouts_v\ x!(2) = 0 \longrightarrow$
$(0 < x \wedge \neg\ hd\ (inouts_v\ (x - Suc\ 0)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 1] = inouts_v{}'\ x) \wedge$
$(\neg\ hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 1] = inouts_v{}'\ x) \wedge$
$((x = 0 \vee hd\ (inouts_v\ (x - Suc\ 0)) = 0) \wedge hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 1] = inouts_v{}'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 0 \longrightarrow$
$(0 < x \wedge \neg\ hd\ (inouts_v\ (x - Suc\ 0)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 0] = inouts_v{}'\ x) \wedge$
$(\neg\ hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 0] = inouts_v{}'\ x) \wedge$
$((x = 0 \vee hd\ (inouts_v\ (x - Suc\ 0)) = 0) \wedge hd\ (tl\ (inouts_v\ x)) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x)))$
from *a1* **have** *len-3*: $\forall\, na.\ length(inouts_v\ na) = 3$
by (*meson neq0-conv*)
from *len-3* **have** *hd-drop*: $(hd\ (drop\ 2\ (inouts_v\ x)) = inouts_v\ x!(2))$
by (*simp add*: *hd-drop-conv-nth*)
have *hd-take*: $hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = hd\ (inouts_v\ (x - Suc\ 0))$
by (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *hd-tl-take*: $hd\ (tl\ (take\ 2\ (inouts_v\ x))) = hd\ (tl\ (inouts_v\ x))$
by (*metis Suc-1 hd-conv-nth less-numeral-extra(1) nth-take take-eq-Nil take-tl zero-neq-one*)
show $((hd\ (drop\ 2\ (inouts_v\ x)) = 0 \longrightarrow$

$(0 < x \wedge \neg\ hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge$
$(\neg\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge$
$((x = 0 \vee hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = 0) \wedge hd\ (tl\ (take\ 2\ (inouts_v\ x))) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 1] = inouts_v'\ x)) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ x)) = 0 \longrightarrow$
$(0 < x \wedge \neg\ hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 0] = inouts_v'\ x) \wedge$
$(\neg\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = 0 \longrightarrow length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 0] = inouts_v'\ x) \wedge$
$((x = 0 \vee hd\ (take\ 2\ (inouts_v\ (x - Suc\ 0))) = 0) \wedge hd\ (tl\ (take\ 2\ (inouts_v\ x))) = 0 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))$

by (*simp add*: *a1 hd-drop hd-take hd-tl-take*)

qed

qed

then have *f4-3*: $(((UnitDelay\ 0\ (*3*)) \|_B\ Id)\ ;;\ (LopOR\ 2\ (*1*))) \|_B\ (Id\ ;;\ LopNOT\ (*2*)))$
$= FBlock\ (\lambda x\ n.\ True)\ 3\ 2$
$(\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0\ then\ 1::real\ else\ 0,$
$if\ (x\ n)!2 = 0\ then\ 1\ else\ 0]))$

using *f4 f4-0 f4-1* **by** *simp*

have *simblock-f4*: $SimBlock\ 3\ 2\ (FBlock\ (\lambda x\ n.\ True)\ 3\ 2$
$(\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0\ then\ 1::real\ else\ 0,$
$if\ (x\ n)!2 = 0\ then\ 1\ else\ 0])))$

by (*metis* (*no-types*, *lifting*) *One-nat-def SimBlock-FBlock-parallel-comp Suc-1 Suc-eq-plus1 f4 f4-3 numeral-3-eq-3 simblock-f2 simblock-f3*)

have *f5*: $((((UnitDelay\ 0\ (*3*)) \|_B\ Id)\ ;;\ (LopOR\ 2\ (*1*)))$
$\|_B$
$(Id\ ;;\ LopNOT\ (*2*))$
$)\ ;;\ (LopAND\ 2)\ (*Latch\text{-}1*)) =$
$FBlock\ (\lambda x\ n.\ True)\ 3\ 2$
$(\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0\ then\ 1::real\ else\ 0,$
$if\ (x\ n)!2 = 0\ then\ 1\ else\ 0]))\ ;;\ (LopAND\ 2)$

using *f4-3* **by** *simp*

then have *f5-0*: $... = FBlock\ (\lambda x\ n.\ True)\ 3\ 1$
$(f\text{-}LopAND\ o\ (\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0\ then\ 1::real\ else\ 0,$
$if\ (x\ n)!2 = 0\ then\ 1\ else\ 0])))$

by (*metis* (*no-types*, *lifting*) *LopAND-def One-nat-def FBlock-seq-comp SimBlock-LopAND SimBlock-FBlock-parallel-comp Suc-1 Suc-eq-plus1 f4 f4-3 numeral-3-eq-3 pos2 simblock-f2 simblock-f3*)

then have *f5-1*: $... = FBlock\ (\lambda x\ n.\ True)\ 3\ 1$
$(\lambda x\ n.\ ([if\ ((n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0) \wedge (x\ n)!2 = 0\ then\ 1::real\ else\ 0]))$

proof −

have $\forall x\ n.\ (f\text{-}LopAND\ o\ (\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0\ then\ 1::real\ else\ 0,$
$if\ (x\ n)!2 = 0\ then\ 1\ else\ 0]))\ x\ n$
$= (\lambda x\ n.\ ([if\ ((n > 0 \wedge hd(x\ (n-1)) \neq 0) \vee hd(tl(x\ n)) \neq 0) \wedge (x\ n)!2 = 0\ then\ 1::real\ else\ 0]))\ x\ n$

by (*simp add*: *f-LopAND-def*)

then show *?thesis*

apply (*simp add*: *FBlock-def*)

apply (*rel-simp*)

apply (*simp add*: *f-LopAND-def*)
apply (*rule iffI*)
apply (*clarify*)
using *neq0-conv* **apply** *blast*
apply (*clarify*)
by *blast*
qed
have *simblock-f5*: *SimBlock 3 1* (*FBlock* (λ*x n*. *True*) *3 1*
(λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*])))
using *simblock-f4*
by (*metis* (*no-types*, *lifting*) *LopAND-def SimBlock-LopAND SimBlock-FBlock-seq-comp f5-0 f5-1 pos2*)

have *f6*: ((((*UnitDelay 0* (∗*3*∗) ‖$_B$ *Id*) ; ; (*LopOR 2* (∗*1*∗)))
‖$_B$
(*Id* ; ; *LopNOT* (∗*2*∗))) ; ; (*LopAND 2*) (∗*Latch-1*∗) ; ; *Split2*)
= (*FBlock* (λ*x n*. *True*) *3 1*
(λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*]))
; ; *Split2*)
using *f5 f5-0 f5-1* **by** (*simp add*: *RA1*)
then have *f6-0*: ... = (*FBlock* (λ*x n*. *True*) *3 2* (*f-Split2 o*
(λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*]))))
using *Split2-def FBlock-seq-comp simblock-f5* **by** (*metis* (*no-types*, *lifting*) *SimBlock-Split2*)
then have *f6-1*: ... = (*FBlock* (λ*x n*. *True*) *3 2*
((λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*,
if ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*])))
proof −
have ∀ *n f*. [*if* (*0* < *n* ∧ ¬ *hd* (*f* (*n* − *1*)) = (*0*::*real*) ∨ ¬ *hd* (*tl* (*f n*)) = *0*) ∧
f n!(*2*) = (*0*::*real*) *then 1 else 0*, *if* (*0* < *n* ∧ ¬ *hd* (*f* (*n* − *1*)) = *0* ∨
¬ *hd* (*tl* (*f n*)) = *0*) ∧ *f n*!(*2*) = (*0*::*real*) *then 1 else 0*] =
(*f-Split2* ∘ (λ*f n*. [*if* (*0* < *n* ∧ ¬ *hd* (*f* (*n* − *1*)) = *0* ∨ ¬ *hd* (*tl* (*f n*)) = *0*) ∧
f n!(*2*) = (*0*::*real*) *then 1 else 0*])) *f n*
by (*simp add*: *f-Split2-def*)
then show *?thesis*
by *presburger*
qed
have *simblock-f6*: *SimBlock 3 2* (*FBlock* (λ*x n*. *True*) *3 2*
((λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*,
if ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*])))
using *simblock-f5 SimBlock-Split2*
by (*smt SimBlock-FBlock-seq-comp Split2-def f6-0 f6-1*)
let *?f6* = (*FBlock* (λ*x n*. *True*) *3 2*
((λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*,
if ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*])))
have *inps-f6*: *inps ?f6* = *3*
using *inps-P simblock-f6* **by** *blast*
have *outps-f6*: *outps ?f6* = *2*
using *outps-P simblock-f6* **by** *blast*

have *f7*: *latch* = *?f6* *f*$_D$ (*0*,*0*)
using *f6 f6-0 f6-1 latch-def* **by** *simp*
have *is-solution-f7*: *is-Solution 0 0 3 2*
((λ*x n*. ([*if* ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*,
if ((*n* > *0* ∧ *hd*(*x* (*n*−*1*)) ≠ *0*) ∨ *hd*(*tl*(*x n*)) ≠ *0*) ∧ (*x n*)!*2* = *0 then 1*::*real else 0*])))
(λ(*inouts*$_0$::*nat* ⇒ *real list*). λ*na*. *latch-rec-calc-output*

```
                (λn1. hd(inouts0 n1)) (λn1. (inouts0 n1)!1) na)
    apply (simp add: is-Solution-def)
    apply (rule allI)
    apply (clarify)
    apply (simp add: f-PreFD-def)
    using latch-rec-calc-output-is-a-solution by blast
  have unique-f7: Solvable-unique 0 0 3 2
    (λx n. ([if ((n > 0 ∧ hd(x (n−1)) ≠ 0) ∨ hd(tl(x n)) ≠ 0) ∧ (x n)!2 = 0 then 1::real else 0,
          if ((n > 0 ∧ hd(x (n−1)) ≠ 0) ∨ hd(tl(x n)) ≠ 0) ∧ (x n)!2 = 0 then 1::real else 0]))
    apply (simp add: Solvable-unique-def)
    apply (rule allI, clarify, simp add: f-PreFD-def)
    apply (rule ex-ex1I)
   apply (rule-tac x = λna. latch-rec-calc-output (λn1. hd(inouts0 n1)) (λn1. (inouts0 n1)!1) na in
exI)
    apply (simp)
    apply (rule allI)
    using latch-rec-calc-output-is-a-solution apply blast
    proof −
     fix inouts0::nat ⇒ real list and xx y ::nat ⇒ real
     assume a1: ∀ n. ((0 < n ∧ ¬ xx (n − Suc 0) = 0 ∨ ¬ hd (inouts0 n) = 0) ∧
                  inouts0 n!(Suc 0) = 0 ⟶ xx n = 1) ∧
                 ((n = 0 ∨ xx (n − Suc 0) = 0) ∧ hd (inouts0 n) = 0 ⟶ xx n = 0) ∧
                  (¬ inouts0 n!(Suc 0) = 0 ⟶ xx n = 0)
     assume a2: ∀ n. ((0 < n ∧ ¬ y (n − Suc 0) = 0 ∨ ¬ hd (inouts0 n) = 0) ∧
                  inouts0 n!(Suc 0) = 0 ⟶ y n = 1) ∧
                 ((n = 0 ∨ y (n − Suc 0) = 0) ∧ hd (inouts0 n) = 0 ⟶ y n = 0) ∧
                  (¬ inouts0 n!(Suc 0) = 0 ⟶ y n = 0)
     have 1: ∀ n. xx n = y n
      apply (rule allI)
      proof −
       fix n::nat
       show xx n = y n
        proof (induct n)
         case 0
         then show ?case
          using a1 a2 by metis
        next
         case (Suc n) note IH = this
         then show ?case
          using a1 a2 by (metis One-nat-def diff-Suc-1 zero-less-Suc)
        qed
      qed
     show xx = y
      using 1 fun-eq by (blast)
    qed
  have f7-0:
    ?f6 f_D (0,0) = (FBlock (λx n. True) (3−1) (2−1)
        (λx na. ((f-PostFD 0)
        o (λx n. ([if ((n > 0 ∧ hd(x (n−1)) ≠ 0) ∨ hd(tl(x n)) ≠ 0) ∧ (x n)!2 = 0 then 1::real else
0,
            if ((n > 0 ∧ hd(x (n−1)) ≠ 0) ∨ hd(tl(x n)) ≠ 0) ∧ (x n)!2 = 0 then 1::real else 0]))
        o (f-PreFD ((λ(inouts0::nat ⇒ real list). λna. latch-rec-calc-output
                (λn1. hd(inouts0 n1)) (λn1. (inouts0 n1)!1) na) x) 0)) x na))
    using FBlock-feedback' f7 is-solution-f7 unique-f7 simblock-f6 by blast
  then have f7-1: ... = FBlock (λx n. True) 2 1
```

```
    (λx na. [if (0 < na ∧
            ¬ latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) (na − Suc 0) = 0
            ∨ ¬ hd (x na) = 0) ∧ x na!(Suc 0) = 0
          then 1 else 0])
    by (simp (no-asm) add: f-PreFD-def f-PostFD-def)
  show ?thesis
    using f7 f7-0 f7-1 latch-simp-pat-f-eq by (simp)
qed
```

C.3.1 Verification

latch-req-00: if R is true, then the output is always false.

```
lemma latch-req-00:
  ((∀ n::nat ⋅ (
    «(λx n. ((hd(x n) = 0 ∨ hd(x n) = 1) ∧ (hd(tl(x n)) = 0 ∨ hd(tl(x n)) = 1)))»
     (&inouts)_a («n»)_a)::sim-state upred)
  ⊢_n
  ((∀ n::nat ⋅
    ((#_u($inouts («n»)_a)) =_u «2») ∧
    ((#_u($inouts´ («n»)_a)) =_u «1») ∧
    (head_u(tail_u($inouts («n»)_a)) ≠_u 0) ⇒ (head_u(($inouts´ («n»)_a)) =_u 0))
  )) ⊑ latch
 using latch-simp apply (simp add: latch-def)
 proof −
  show (∀ n ⋅ «λx n. (hd (x n) = 0 ∨ hd (x n) = 1) ∧ (hd (tl (x n)) = 0 ∨ hd (tl (x n)) = 1)»
    (&inouts)_a(«n»)_a) ⊢_n
    (∀ n ⋅ #_u($inouts(«n»)_a) =_u «2» ∧
         #_u($inouts´(«n»)_a) =_u «Suc 0» ∧ head_u(tail_u($inouts(«n»)_a)) ≠_u 0 ⇒
         head_u($inouts´(«n»)_a) =_u 0)
    ⊑
    FBlock (λx n. True) 2 (Suc 0)
     (λx na. [latch-rec-calc-output (λn1. hd (x n1)) (λn1. x n1!(Suc 0)) na])
    apply (simp add: FBlock-def)
    apply (rule ndesign-refine-intro)
    apply simp
    apply (rel-simp)
    proof −
     fix inouts_v inouts_v'::nat ⇒ real list and x::nat
     assume a1: ∀x. (hd (inouts_v x) = 0 ∨ hd (inouts_v x) = 1) ∧ (hd (tl (inouts_v x)) = 0 ∨
                hd (tl (inouts_v x)) = 1)
     assume a2: ∀x. length(inouts_v x) = 2 ∧
       length(inouts_v' x) = Suc 0 ∧
       [latch-rec-calc-output (λn1. hd (inouts_v n1)) (λn1. inouts_v n1!(Suc 0)) x] = inouts_v' x
     assume a3: ¬ hd (tl (inouts_v x)) = 0
     have 1: ¬ inouts_v x!(Suc 0) = 0
       using a2 a3
       by (metis One-nat-def Suc-1 diff-Suc-1 diff-is-0-eq hd-conv-nth length-tl
         less-numeral-extra(1) list.size(3) not-one-le-zero nth-tl)
     have 2: inouts_v' x = [0]
       using a2 1
       by (metis (mono-tags, lifting) latch-rec-calc-output.elims)
     then show hd (inouts_v' x) = 0
       by (simp)
  qed
 qed
```

C.4 System: *post-landing-finalize*

post-mode is a part of block compositions from the input *mode* to the three-way AND logic block.

definition *post-mode* ≡
(*Split2* (∗ *mode is split into two* ∗) ; ;
(
((*UnitDelay 0* (∗*IC = 0*, *r=1/10s*∗) ‖$_B$ *Const 4* (∗*landing*, *uint32*(*4*), *r=1/10s*∗)) ; ; *RopEQ*)
‖$_B$
((*Id* ‖$_B$ *Const 8* (∗*ground*, *uint32*(*8*), *r=1/10s*∗)) ; ; *RopEQ*)
)
)

lemma *post-mode-simp*:
post-mode = (*FBlock* (λ*x n*. *True*) (*1*) (*2*)
(λ*x n*. (([*if* (*n* > *0* ∧ *hd*(*x* (*n*−*1*)) = *4*) *then 1*::*real else 0*, *if hd*(*x n*) = *8 then 1 else 0*]))))
proof −

have *f1*: (*UnitDelay 0* (∗*IC = 0*, *r=1/10s*∗) ‖$_B$ *Const 4* (∗*landing*, *uint32*(*4*), *r=1/10s*∗))
= *FBlock* (λ*x n*. *True*) (*1*) (*2*)
(λ*x n*. (((*f-UnitDelay 0* ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*) •
((*f-Const 4* ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*))
using *SimBlock-UnitDelay SimBlock-Const* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *numeral-2-eq-2*)
have *f1-0*: ... = *FBlock* (λ*x n*. *True*) (*1*) (*2*)
(λ*x n*. ([*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *4*]))
using *f-UnitDelay-def f-Const-def* **apply** (*auto*)
proof −
{ fix *nn* :: *nat* **and** *rrs* :: *nat* ⇒ *real list*
have ∀ *rs n*. *hd* (*take n rs*) = (*hd rs*::*real*) ∨ *take n rs* = []
by (*metis append-take-drop-id hd-append2*)
then have *FBlock* (λ*f n*. *True*) (*Suc 0*) *2* (λ*f n*. [*if n = 0 then 0 else hd* (*take* (*Suc 0*) (*f* (*n* − *1*))), *4*])
= *FBlock* (λ*f n*. *True*) (*Suc 0*) *2* (λ*f n*. [*if n = 0 then 0 else hd* (*f* (*n* − *1*)), *4*]) ∨
[*if nn = 0 then 0 else hd* (*take* (*Suc 0*) (*rrs* (*nn* − *1*))), *4*] = [*if nn = 0 then 0 else hd* (*rrs* (*nn* − *1*)), *4*]
by *force* **}**
then show *FBlock* (λ*f n*. *True*) (*Suc 0*) *2* (λ*f n*. [*if n = 0 then 0 else hd* (*take* (*Suc 0*) (*f* (*n* − *1*))), *4*])
= *FBlock* (λ*f n*. *True*) (*Suc 0*) *2* (λ*f n*. [*if n = 0 then 0 else hd* (*f* (*n* − *1*)), *4*])
by *presburger*
qed
have *simblock-f1*: *SimBlock 1 2* (*FBlock* (λ*x n*. *True*) (*1*) (*2*)
(λ*x n*. ([*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *4*])))
using *SimBlock-UnitDelay SimBlock-Const f1 f1-0* **apply** (*simp add*: *SimBlock-FBlock-parallel-comp f-sim-blocks*)
by (*smt One-nat-def SimBlock-FBlock-parallel-comp Suc-1 Suc-eq-plus1 add.right-neutral*)

have *f2*: ((*UnitDelay 0* (∗*IC = 0*, *r=1/10s*∗) ‖$_B$ *Const 4* (∗*landing*, *uint32*(*4*), *r=1/10s*∗)) ; ; *RopEQ*) =
(*FBlock* (λ*x n*. *True*) (*1*) (*2*) (λ*x n*. ([*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *4*]))) ; ; *RopEQ*
using *f1 f1-0* **by** *simp*
then have *f2-0*: ... =
(*FBlock* (λ*x n*. *True*) (*1*) (*1*) (*f-RopEQ o* (λ*x n*. ([*if n = 0 then 0 else hd*(*x* (*n*−*1*)), *4*]))))

```
  using simblock-f1 SimBlock-RopEQ FBlock-seq-comp by (simp add: RopEQ-def)
 then have f2-1: ... = (FBlock (λx n. True) (1) (1)
  (λx n. ([if (n > 0 ∧ hd(x (n−1)) = 4) then 1::real else 0])))
  proof −
   have ∀ x n. (f-RopEQ o (λx n. ([if n = 0 then 0 else hd(x (n−1)), 4]))) x n
    = (λx n. ([if (n > 0 ∧ hd(x (n−1)) = 4) then 1::real else 0])) x n
    using f-RopEQ-def by auto
   then show ?thesis
    by presburger
  qed
 have simblock-f2: SimBlock 1 1 (FBlock (λx n. True) (1) (1)
  (λx n. ([if (n > 0 ∧ hd(x (n−1)) = 4) then 1::real else 0])))
  using f2 f2-0 f2-1 by (smt RopEQ-def SimBlock-FBlock-seq-comp SimBlock-RopEQ simblock-f1)

 have f3: (Id ‖B Const 8 (∗ground, uint32(8), r=1/10s∗))
  = FBlock (λx n. True) (1) (2)
   (λx n. (((f-Id ∘ (λxx nn. take 1 (xx nn))) x n) •
        ((f-Const 8 ∘ (λxx nn. drop 1 (xx nn)))) x n))
  using SimBlock-Id SimBlock-Const apply (simp add: FBlock-parallel-comp f-sim-blocks)
  by (simp add: numeral-2-eq-2)
 then have f3-0: ... = FBlock (λx n. True) (1) (2) (λx n. ([hd(x n), 8]))
  proof −
   have ∀ x n. ((λx n. (((f-Id ∘ (λxx nn. take 1 (xx nn))) x n) •
        ((f-Const 8 ∘ (λxx nn. drop 1 (xx nn)))) x n)) x n
    = (λx n. ([hd(x n), 8])) x n)
    using f-Id-def f-Const-def
    proof −
    { fix rrs :: nat ⇒ real list and nn :: nat
     have ∀ rs. hd (take 1 rs) = (hd rs::real) ∨ rs = []
      by (metis Suc-eq-plus1 add.left-neutral list.sel(1) take-Suc)
     then have (f-Id ∘ (λf n. take 1 (f n))) rrs nn • (f-Const 8 ∘ (λf n. drop 1 (f n))) rrs nn =
[hd (rrs nn), 8]
      using f-Const-def f-Id-def by auto }
     then show ?thesis
      by fastforce
    qed
   then show ?thesis
    by simp
  qed
 have simblock-f3: SimBlock 1 2 (FBlock (λx n. True) (1) (2) (λx n. ([hd(x n), 8])))
 by (metis (no-types, lifting) One-nat-def SimBlock-Const SimBlock-Id SimBlock-FBlock-parallel-comp

    Suc-1 Suc-eq-plus1 add.commute f3 f3-0 simu-contract-real.Const-def simu-contract-real.Id-def)

 have f4: ((Id ‖B Const 8 (∗ground, uint32(8), r=1/10s∗)) ; ; RopEQ)
  = FBlock (λx n. True) (1) (2) (λx n. ([hd(x n), 8])) ; ; RopEQ
  using f3 f3-0 by simp
 then have f4-0: ... = FBlock (λx n. True) (1) (1) (f-RopEQ o (λx n. ([hd(x n), 8])))
  using simblock-f3 SimBlock-RopEQ FBlock-seq-comp by (simp add: RopEQ-def)
 then have f4-1: ... = FBlock (λx n. True) (1) (1) (λx n. ([if hd(x n) = 8 then 1 else 0]))
  using f-RopEQ-def by (metis (mono-tags, lifting) comp-apply list.sel(1) list.sel(3))
 have simblock-f4: SimBlock 1 1
   (FBlock (λx n. True) (1) (1) (λx n. ([if hd(x n) = 8 then 1 else 0])))
  using simblock-f3 SimBlock-RopEQ by (metis RopEQ-def SimBlock-FBlock-seq-comp f4-0 f4-1)
```

have *f5*: (
(($UnitDelay\ 0\ (*IC = 0,\ r=1/10s*)\ \|_B\ Const\ 4\ (*landing,\ uint32(4),\ r=1/10s*))\ ;;\ RopEQ$)
$\|_B$
($(Id\ \|_B\ Const\ 8\ (*ground,\ uint32(8),\ r=1/10s*))\ ;;\ RopEQ$))
$= (FBlock\ (\lambda x\ n.\ True)\ (1)\ (1)\ (\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) = 4)\ then\ 1::real\ else\ 0])))$
$\|_B$
$(FBlock\ (\lambda x\ n.\ True)\ (1)\ (1)\ (\lambda x\ n.\ ([if\ hd(x\ n) = 8\ then\ 1\ else\ 0])))$
using *f2 f2-1 f4 f4-1 f2-0 f4-0* **by** *auto*
then have *f5-0*: ... $= FBlock\ (\lambda x\ n.\ True)\ (2)\ (2)$
$(\lambda x\ n.\ ((((\lambda x\ n.\ ([if\ (n > 0 \wedge hd(x\ (n-1)) = 4)\ then\ 1::real\ else\ 0]))$
$\circ\ (\lambda xx\ nn.\ take\ 1\ (xx\ nn)))\ x\ n) \bullet$
$((\ (\lambda x\ n.\ ([if\ hd(x\ n) = 8\ then\ 1\ else\ 0]))$
$\circ\ (\lambda xx\ nn.\ drop\ 1\ (xx\ nn))))\ x\ n))$
using *simblock-f2 simblock-f4* **apply** (*simp add*: *FBlock-parallel-comp f-sim-blocks*)
by (*simp add*: *numeral-2-eq-2*)
then have *f5-1*: ... $= FBlock\ (\lambda x\ n.\ True)\ (2)\ (2)$
$(\lambda x\ n.\ (([if\ (n > 0 \wedge hd(x\ (n-1)) = 4)\ then\ 1::real\ else\ 0,\ if\ (x\ n)!1 = 8\ then\ 1\ else\ 0])))$
proof −
show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
apply (*rule conjI*)
apply (*clarify*)
apply (*rule conjI*)
apply (*clarify*)
apply (*rule iffI*)
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*rule iffI*)
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*

using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*rule conjI*)
apply (*clarify*)
apply (*rule iffI*)
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*rule iffI*)
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
apply *metis*
using *neq0-conv* **apply** *blast*
apply (*clarify*)
apply (*subgoal-tac* $\forall x.\ length(inouts_v\ x) = 2$)
apply (*rule conjI*)
apply (*clarify*)
using *hd-drop-m hd-take-m* **apply** (*metis Suc-1 Suc-eq-plus1 add.left-neutral lessI*)
using *hd-drop-m hd-take-m* **apply** *simp*
apply *metis*
using *neq0-conv* **by** *blast*
qed
have *simblock-f5*: *SimBlock 2 2* (*FBlock* ($\lambda x\ n.$ *True*) (*2*) (*2*)
($\lambda x\ n.$ (([*if* $(n > 0 \wedge hd(x\ (n-1)) = 4)$ *then 1*::*real else 0*, *if* $(x\ n)!1 = 8$ *then 1 else 0*]))))
using *simblock-f2 simblock-f4 SimBlock-FBlock-parallel-comp f5 f5-0 f5-1*
by (*metis* (*no-types*, *lifting*) *one-add-one*)

have *f6*: *post-mode* = *Split2* ; ; (*FBlock* ($\lambda x\ n.$ *True*) (*2*) (*2*)
($\lambda x\ n.$ (([*if* $(n > 0 \wedge hd(x\ (n-1)) = 4)$ *then 1*::*real else 0*, *if* $(x\ n)!1 = 8$ *then 1 else 0*]))))
using *f5 f5-0 f5-1 post-mode-def* **by** *auto*
then have *f6-0*: ... = (*FBlock* ($\lambda x\ n.$ *True*) (*1*) (*2*) (
($\lambda x\ n.$ (([*if* $(n > 0 \wedge hd(x\ (n-1)) = 4)$ *then 1*::*real else 0*, *if* $(x\ n)!1 = 8$ *then 1 else 0*]))) *o* *f-Split2*))
using *SimBlock-Split2 simblock-f5* **by** (*simp add*: *FBlock-seq-comp f-sim-blocks*)
then have *f6-1*: ... = (*FBlock* ($\lambda x\ n.$ *True*) (*1*) (*2*)
($\lambda x\ n.$ (([*if* $(n > 0 \wedge hd(x\ (n-1)) = 4)$ *then 1*::*real else 0*, *if* $hd(x\ n) = 8$ *then 1 else 0*]))))
proof −
have $\forall x\ n.$ (($\lambda x\ n.$ (([*if* $(n > 0 \wedge hd(x\ (n-1)) = 4)$ *then 1*::*real else 0*,
if $(x\ n)!1 = 8$ *then 1 else 0*]))) *o* *f-Split2*) *x n*

```
      = (λx n. (([if (n > 0 ∧ hd(x (n−1)) = 4) then 1::real else 0,
                  if hd(x n) = 8 then 1 else 0]))) x n
      using f-Split2-def by simp
    then show ?thesis
      by metis
  qed
 then show ?thesis
  using f6 f6-0 by auto
qed
```

Finally, *post-landing-finalize* is the composition of subsystems defined previously and other blocks. It is shown in *post-landing-finalize-1*.

```
abbreviation post-landing-finalize-part1 ≡ (
  (
    (
      (
        Split2 (∗ door-closed (boolean, 1/10s) is split into two ∗)
        ‖B
        Id (∗ door-open-time: double ∗)
      ) ; ; Router 3 [0,2,1]
    )
    ‖B
    post-mode
  )
  ‖B
  (
    (UnitDelay 1.0 ; ; LopNOT) (∗ ac-on-ground ∗)
    ‖B
    (UnitDelay 0) (∗ Delay2 ∗)
  )
)

abbreviation post-landing-finalize-part2 ≡ (
    (
      (LopNOT)
      ‖B
      (Id) (∗ door-open-time: double ∗)
    ) ; ; variableTimer
  )

abbreviation post-landing-finalize-part3 ≡ (
    (
      (LopAND 3)
      ‖B
      (LopOR 2)
    ) ; ; latch
  )


definition post-landing-finalize-1 ≡
(
  post-landing-finalize-part1 ; ;
  (
    post-landing-finalize-part2
    ‖B
```

```
    post-landing-finalize-part3
  ) ; ;  LopAND 2; ;  rise1Shot ; ;  Split2
) f_D (4, 1)
```

Simplified design corresponding to a part of the diagram from inputs to *variableTimer*.

```
abbreviation plf-vt-simp ≡ λx na. if (if hd(x na) = 0
                then (if na = 0 then 0
                     else min (vT-fd-sol-1
                           (λn1. (λna. real-of-int
                                 (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
                           (λn1. (if hd(x n1) = 0 then 1::real else 0)) (na − 1))
                          ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0))
0⌉))))
                           (na − 1))) + 1::real
              else 0) > (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
        then 1::real else 0
```

Simplified design corresponding to a part of the diagram from inputs to *latch*.

```
abbreviation plf-latch-simp ≡ λx na. (latch-rec-calc-output
                (λn1. (if hd(x n1) = 0 ∨ n1 = 0 ∨ (x (n1−1))!2 ≠ 4 ∨ (x n1)!2 ≠ 8
                   then 0 else 1::real))
                (λn1. (if ((n1 = 0) ∨ ((x (n1 − 1))!3 ≠ 0 ∧ (x (n1 − 1))!4 = 0))
                   then 0 else 1::real))
                (na))
```

A function for the simplified design corresponding to a part of the diagram from inputs to outputs but without the feedback from one of outputs.

```
abbreviation plf-rise1shot-simp-f ≡ (λx n. [if (((plf-vt-simp x n) ≠ 0 ∧ (plf-latch-simp x n) ≠ 0) ∧
                (n > 0 ∧ ((plf-vt-simp x (n−1)) = 0 ∨ (plf-latch-simp x (n−1)) = 0))) then 1 else 0,
                   if (((plf-vt-simp x n) ≠ 0 ∧ (plf-latch-simp x n) ≠ 0) ∧
                (n > 0 ∧ ((plf-vt-simp x (n−1)) = 0 ∨ (plf-latch-simp x (n−1)) = 0))) then 1 else 0])
```

Simplified design corresponding to a part of the diagram from inputs to outputs but without the feedback from one of outputs.

```
definition plf-rise1shot-simp ≡ FBlock (λx n. True) 5 2 plf-rise1shot-simp-f
```

```
lemma post-landing-finalize-1-simp-simblock:
  post-landing-finalize-1 = plf-rise1shot-simp f_D (4, 1) ∧ SimBlock 5 2 plf-rise1shot-simp
  proof −

    let ?f1-f = (λx n. [hd(x n), hd(x n), hd(tl(x n))])
    let ?f1 = FBlock (λx n. True) 2 3 ?f1-f
    have f1: Split2 (* door-closed (boolean, 1/10s) is split into two *)
        ‖_B Id (* door-open-time: double *)
      = FBlock (λx n. True) (1+1) (2+1)
        (λx n. (((f-Split2 ∘ (λxx nn. take 1 (xx nn))) x n) •
              ((f-Id ∘ (λxx nn. drop 1 (xx nn)))) x n))
      using SimBlock-Id SimBlock-Split2 FBlock-parallel-comp
      by (simp add: Split2-def simu-contract-real.Id-def)
    then have f1-0: ... = ?f1
      proof −
```

```
    have ∀ x n. ((λx n. (((f-Split2 ∘ (λxx nn. take 1 (xx nn))) x n) •
          ((f-Id ∘ (λxx nn. drop 1 (xx nn)))) x n)) x n)
      = (?f1-f x n)
      using f-Id-def f-Split2-def by (simp add: drop-Suc hd-take-m)
    then show ?thesis
      apply (simp)
      by (simp add: numeral-2-eq-2)
  qed
have simblock-f1: SimBlock 2 3 (?f1)
  using SimBlock-Id SimBlock-Split2 SimBlock-FBlock-parallel-comp
  by (metis (no-types, lifting) One-nat-def Split2-def Suc-1 Suc-eq-plus1 f1 f1-0
      numeral-3-eq-3 simu-contract-real.Id-def)

let ?f2-f = (λx n. [hd(x n), hd(tl(x n)), hd(x n)])
let ?f2 = FBlock (λx n. True) (2) (3) ?f2-f
have f2: (Split2 ‖B Id) ;; Router 3 [0,2,1] = ?f1 ;; Router 3 [0,2,1]
  using f1 f1-0 by auto
then have f2-0: ... = FBlock (λx n. True) (2) (3) (f-Router [0,2,1] o ?f1-f)
  using simblock-f1 Router-def SimBlock-Router FBlock-seq-comp by simp
then have f2-1: ... = ?f2
  proof −
    have ∀ x n. (f-Router [0,2,1] o ?f1-f) x n = ?f2-f x n
      using f-Router-def by (simp)
    then show ?thesis
      by presburger
  qed
have simblock-f2: SimBlock 2 3 ?f2
  using simblock-f1 SimBlock-Router SimBlock-FBlock-seq-comp
  by (metis (no-types, lifting) Router-def f2-0 f2-1 length-Cons list.size(3) numeral-3-eq-3)

let ?post-mode-f =
  (λx n. (([if (n > 0 ∧ hd(x (n−1)) = 4) then 1::real else 0, if hd(x n) = 8 then 1 else 0])))
let ?post-mode = (FBlock (λx n. True) (1) (2) ?post-mode-f)
have simblock-post-mode: SimBlock 1 2 (?post-mode)
  apply (rule SimBlock-FBlock)
  apply (rule-tac x = λna. [4] in exI)
  apply (rule-tac x = λna. [if na > 0 then 1 else 0, 0] in exI)
  apply (simp add: f-blocks)
  by (simp add: f-blocks)
let ?f3-f = (λx n. [hd(x n), hd(tl(x n)), hd(x n),
      if (n > 0 ∧ (x (n−1))!2 = 4) then 1::real else 0,
      if (x n)!2 = 8 then 1 else 0])
let ?f3 = FBlock (λx n. True) 3 5 ?f3-f
have f3: ((( Split2 (∗ door-closed (boolean, 1/10s) is split into two ∗)
          ‖B
          Id (∗ door-open-time: double ∗)
        ) ;; Router 3 [0,2,1])
        ‖B post-mode) = ?f2 ‖B ?post-mode
  using f2 f2-0 f2-1 post-mode-simp by auto
then have f3-0: ... = FBlock (λx n. True) (2+1) (3+2)
   (λx n. (((?f2-f ∘ (λxx nn. take 2 (xx nn))) x n) •
        ((?post-mode-f ∘ (λxx nn. drop 2 (xx nn)))) x n))
  using simblock-post-mode simblock-f1 FBlock-parallel-comp simblock-f2 by blast
then have f3-1: ... = FBlock (λx n. True) (2+1) (3+2) ?f3-f
  proof −
```

show *?thesis*
apply (*simp add*: *FBlock-def*)
apply (*rel-simp*)
apply (*rule conjI*, *clarify*)
apply (*rule conjI*, *clarify*)
apply (*rule iffI*, *clarify*)
defer
apply (*clarify*)
defer
apply (*clarify*, *rule iffI*, *clarify*)
apply (*metis hd-drop-conv-nth lessI numeral-2-eq-2 numeral-3-eq-3*)
apply (*clarify*)
apply (*simp add*: *hd-drop-conv-nth*)
apply (*clarify*, *rule conjI*, *clarify*)
apply (*rule iffI*, *clarify*)
apply (*metis hd-drop-conv-nth lessI numeral-2-eq-2 numeral-3-eq-3*)
apply (*clarify*)
apply (*simp add*: *hd-drop-conv-nth*)
apply (*clarify*, *rule iffI*, *clarify*)
defer
apply (*clarify*)
defer
proof −
fix ok_v ok_v'::*bool* **and** $inouts_v$ $inouts_v'$::*nat* ⇒ *real list* **and** x
assume *a1*: ∀ x. (*hd* (*drop* 2 ($inouts_v$ x)) = 8 ⟶
(0 < x ∧ *hd* (*drop* 2 ($inouts_v$ (x − *Suc* 0))) = 4 ⟶
length($inouts_v$ x) = 3 ∧
length($inouts_v'$ x) = 5 ∧
[*hd* (*take* 2 ($inouts_v$ x)), *hd* (*tl* (*take* 2 ($inouts_v$ x))), *hd* (*take* 2 ($inouts_v$ x)), 1, 1] =
$inouts_v'$ x) ∧
(x = 0 ⟶
length($inouts_v$ 0) = 3 ∧
length($inouts_v'$ 0) = 5 ∧
[*hd* (*take* 2 ($inouts_v$ 0)), *hd* (*tl* (*take* 2 ($inouts_v$ 0))), *hd* (*take* 2 ($inouts_v$ 0)), 0, 1] =
$inouts_v'$ 0) ∧
(¬ *hd* (*drop* 2 ($inouts_v$ (x − *Suc* 0))) = 4 ⟶
length($inouts_v$ x) = 3 ∧
length($inouts_v'$ x) = 5 ∧
[*hd* (*take* 2 ($inouts_v$ x)), *hd* (*tl* (*take* 2 ($inouts_v$ x))), *hd* (*take* 2 ($inouts_v$ x)), 0, 1] =
$inouts_v'$ x)) ∧
(¬ *hd* (*drop* 2 ($inouts_v$ x)) = 8 ⟶
(0 < x ∧ *hd* (*drop* 2 ($inouts_v$ (x − *Suc* 0))) = 4 ⟶
length($inouts_v$ x) = 3 ∧
length($inouts_v'$ x) = 5 ∧
[*hd* (*take* 2 ($inouts_v$ x)), *hd* (*tl* (*take* 2 ($inouts_v$ x))), *hd* (*take* 2 ($inouts_v$ x)), 1, 0] =
$inouts_v'$ x) ∧
(x = 0 ⟶
length($inouts_v$ 0) = 3 ∧
length($inouts_v'$ 0) = 5 ∧
[*hd* (*take* 2 ($inouts_v$ 0)), *hd* (*tl* (*take* 2 ($inouts_v$ 0))), *hd* (*take* 2 ($inouts_v$ 0)), 0, 1] =
$inouts_v'$ 0) ∧
(¬ *hd* (*drop* 2 ($inouts_v$ (x − *Suc* 0))) = 4 ⟶
length($inouts_v$ x) = 3 ∧
length($inouts_v'$ x) = 5 ∧
[*hd* (*take* 2 ($inouts_v$ x)), *hd* (*tl* (*take* 2 ($inouts_v$ x))), *hd* (*take* 2 ($inouts_v$ x)), 0, 0] =

$inouts_v'\ x))$
from *a1* **have** *len-3*: $\forall x.\ length(inouts_v\ x) = 3$
by (*metis neq0-conv*)
have *drop-2*: $\forall x.\ (hd\ (drop\ 2\ (inouts_v'\ x)) = (inouts_v'\ x)!2)$
using *len-3 hd-drop-m*
by (*metis Suc-eq-plus1 Suc-le-eq a1 add-Suc-right add-diff-cancel-right' diff-le-self*
hd-drop-conv-nth neq0-conv one-plus-numeral one-plus-numeral-commute semiring-norm(2)

semiring-norm(3) semiring-norm(4))
have *take-2*: $\forall x.\ hd\ (take\ 2\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-3 hd-take-m* **by** *simp*
have *take-tl-2*: $\forall x.\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = hd(tl(inouts_v\ x))$
using *len-3 hd-tl-take-m* **by** *simp*
show $(inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1] =$
$inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 1] =$
$inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0] =$
$inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 1] =$
$inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0] =$
$inouts_v'\ x))$
using *drop-2 take-2 take-tl-2*
by (*metis One-nat-def Suc-1 a1 hd-drop-conv-nth len-3 lessI numeral-3-eq-3*)
next
fix $ok_v\ ok_v'$::*bool* **and** $inouts_v\ \ inouts_v'$::$nat \Rightarrow real\ list$ **and** x
assume *a1*: $\forall x.\ (inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1] =$
$inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 1] =$
$inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1] =$

$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 1] = inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0] = inouts_v'\ x))$
from *a1* **have** *len-3*: $\forall x.\ length(inouts_v\ x) = 3$
by (*metis neq0-conv*)
have *drop-2*: $\forall x.\ (hd\ (drop\ 2\ (inouts_v'\ x)) = (inouts_v'\ x)!2)$
using *len-3 hd-drop-m*
by (*metis Suc-eq-plus1 Suc-le-eq a1 add-Suc-right add-diff-cancel-right' diff-le-self hd-drop-conv-nth neq0-conv one-plus-numeral one-plus-numeral-commute semiring-norm(2) semiring-norm(3) semiring-norm(4)*)
have *take-2*: $\forall x.\ hd\ (take\ 2\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-3 hd-take-m* **by** *simp*
have *take-tl-2*: $\forall x.\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = hd(tl(inouts_v\ x))$
using *len-3 hd-tl-take-m* **by** *simp*
show $(hd\ (drop\ 2\ (inouts_v\ x)) = 8 \longrightarrow$
$(0 < x \wedge hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge$
$[hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 1,\ 1] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge$
$[hd\ (take\ 2\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 2\ (inouts_v\ 0))),\ hd\ (take\ 2\ (inouts_v\ 0)),\ 0,\ 1] = inouts_v'\ 0) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge$
$[hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 0,\ 1] = inouts_v'\ x)) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ x)) = 8 \longrightarrow$
$(0 < x \wedge hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge$
$[hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 1,\ 0] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge$
$[hd\ (take\ 2\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 2\ (inouts_v\ 0))),\ hd\ (take\ 2\ (inouts_v\ 0)),\ 0,\ 1] = inouts_v'\ 0) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$

$length(inouts_v'\ x) = 5\ \wedge$
$[hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 0,\ 0] = inouts_v'\ x)$
using *drop-2 take-2 take-tl-2*
by (*metis One-nat-def Suc-1 a1 hd-drop-conv-nth len-3 lessI numeral-3-eq-3*)
next
fix $ok_v\ ok_v'$::*bool* **and** $inouts_v\ \ inouts_v'$::$nat \Rightarrow real\ list$ **and** x::*nat*
assume *a1*: $\forall x.\ (hd\ (drop\ 2\ (inouts_v\ x)) = 8 \longrightarrow$
$(0 < x \wedge hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3\ \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 1,\ 1] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3\ \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 2\ (inouts_v\ 0))),\ hd\ (take\ 2\ (inouts_v\ 0)),\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3\ \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 0,\ 1] = inouts_v'\ x)) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ x)) = 8 \longrightarrow$
$(0 < x \wedge hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3\ \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 1,\ 0] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3\ \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 2\ (inouts_v\ 0))),\ hd\ (take\ 2\ (inouts_v\ 0)),\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3\ \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)),\ hd\ (tl\ (take\ 2\ (inouts_v\ x))),\ hd\ (take\ 2\ (inouts_v\ x)),\ 0,\ 0] = inouts_v'\ x))$
assume *a2*: $\neg\ hd\ (drop\ 2\ (inouts_v\ 0)) = 8$
assume *a3*: $\neg\ inouts_v\ 0!(2) = 8$
from *a1* **have** *len-3*: $\forall x.\ length(inouts_v\ x) = 3$
by (*metis neq0-conv*)
have *drop-2*: $\forall x.\ (hd\ (drop\ 2\ (inouts_v'\ x)) = (inouts_v'\ x)!2)$
using *len-3 hd-drop-m*
by (*metis Suc-eq-plus1 Suc-le-eq a1 add-Suc-right add-diff-cancel-right' diff-le-self hd-drop-conv-nth neq0-conv one-plus-numeral one-plus-numeral-commute semiring-norm(2) semiring-norm(3) semiring-norm(4)*)
have *take-2*: $\forall x.\ hd\ (take\ 2\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-3 hd-take-m* **by** *simp*
have *take-tl-2*: $\forall x.\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = hd(tl(inouts_v\ x))$
using *len-3 hd-tl-take-m* **by** *simp*
show $(inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3\ \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3\ \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 0] =$

$inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1] = inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0] = inouts_v'\ x))$
using *drop-2 take-2 take-tl-2*
by (*metis One-nat-def Suc-1 a1 hd-drop-conv-nth len-3 lessI numeral-3-eq-3*)
next
fix $ok_v\ ok_v'$::*bool* **and** $inouts_v\ \ inouts_v'$::*nat* ⇒ *real list* **and** x
assume *a1*: $\forall x.\ (inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1] = inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(0 < x \wedge inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge length(inouts_v'\ 0) = 5 \wedge [hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge length(inouts_v'\ x) = 5 \wedge [hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0] = inouts_v'\ x))$
from *a1* **have** *len-3*: $\forall x.\ length(inouts_v\ x) = 3$
by (*metis neq0-conv*)
have *drop-2*: $\forall x.\ (hd\ (drop\ 2\ (inouts_v'\ x)) = (inouts_v'\ x)!2)$
using *len-3 hd-drop-m*
by (*metis Suc-eq-plus1 Suc-le-eq a1 add-Suc-right add-diff-cancel-right' diff-le-self hd-drop-conv-nth neq0-conv one-plus-numeral one-plus-numeral-commute semiring-norm(2) semiring-norm(3) semiring-norm(4)*)
have *take-2*: $\forall x.\ hd\ (take\ 2\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-3 hd-take-m* **by** *simp*
have *take-tl-2*: $\forall x.\ hd\ (tl\ (take\ 2\ (inouts_v\ x))) = hd(tl(inouts_v\ x))$
using *len-3 hd-tl-take-m* **by** *simp*
show $(hd\ (drop\ 2\ (inouts_v\ x)) = 8 \longrightarrow$

$(0 < x \wedge hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)), hd\ (tl\ (take\ 2\ (inouts_v\ x))), hd\ (take\ 2\ (inouts_v\ x)), 1, 1] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ 0)), hd\ (tl\ (take\ 2\ (inouts_v\ 0))), hd\ (take\ 2\ (inouts_v\ 0)), 0, 0] = inouts_v'\ 0) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)), hd\ (tl\ (take\ 2\ (inouts_v\ x))), hd\ (take\ 2\ (inouts_v\ x)), 0, 1] = inouts_v'\ x)) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ x)) = 8 \longrightarrow$
$(0 < x \wedge hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)), hd\ (tl\ (take\ 2\ (inouts_v\ x))), hd\ (take\ 2\ (inouts_v\ x)), 1, 0] = inouts_v'\ x) \wedge$
$(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 3 \wedge$
$length(inouts_v'\ 0) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ 0)), hd\ (tl\ (take\ 2\ (inouts_v\ 0))), hd\ (take\ 2\ (inouts_v\ 0)), 0, 0] = inouts_v'\ 0) \wedge$
$(\neg\ hd\ (drop\ 2\ (inouts_v\ (x - Suc\ 0))) = 4 \longrightarrow$
$length(inouts_v\ x) = 3 \wedge$
$length(inouts_v'\ x) = 5 \wedge [hd\ (take\ 2\ (inouts_v\ x)), hd\ (tl\ (take\ 2\ (inouts_v\ x))), hd\ (take\ 2\ (inouts_v\ x)), 0, 0] = inouts_v'\ x))$

using *drop-2 take-2 take-tl-2*

by (*metis One-nat-def Suc-1 a1 hd-drop-conv-nth len-3 lessI numeral-3-eq-3*)

qed

qed

have *simblock-f3*: *SimBlock 3 5 (?f3)*

using *simblock-f2 simblock-post-mode SimBlock-FBlock-parallel-comp*

by (*smt Suc-eq-plus1 add-Suc f3-0 f3-1 numeral-2-eq-2 numeral-3-eq-3 numeral-code*(*3*))

let *?f4-f* = $(\lambda x\ n.\ [(if\ n = 0\ then\ 0\ else\ (if\ hd(x\ (n-1)) = 0\ then\ 1\ else\ 0))])$

let *?f4* = *FBlock* $(\lambda x\ n.\ True)$ *1 1 ?f4-f*

have *f4*: (*UnitDelay 1.0* ;; *LopNOT*) = *FBlock* $(\lambda x\ n.\ True)$ *1 1* (*f-LopNOT o f-UnitDelay 1.0*)

using *SimBlock-UnitDelay SimBlock-LopNOT FBlock-seq-comp* **by** (*simp add*: *LopNOT-def UnitDelay-def*)

then have *f4-0*: *... = FBlock* $(\lambda x\ n.\ True)$ *1 1 ?f4-f*

proof −

have $\forall\, x\ n.$ (*f-LopNOT o f-UnitDelay 1.0*) *x n* = *?f4-f x n*

using *f-LopNOT-def f-UnitDelay-def* **by** *simp*

then show *?thesis*

by *presburger*

qed

have *simblock-f4*: *SimBlock 1 1 ?f4*

using *SimBlock-UnitDelay SimBlock-LopNOT SimBlock-FBlock-seq-comp*

by (*metis* (*no-types*, *lifting*) *LopNOT-def UnitDelay-def f4 f4-0*)

let *?f5-f* = $(\lambda x\ n.\ [(if\ n = 0\ then\ 0\ else\ (if\ hd(x\ (n-1)) = 0\ then\ 1\ else\ 0)),$
if n = 0 then 0 else hd$(tl(x\ (n - 1)))])$

let *?f5* = *FBlock* $(\lambda x\ n.\ True)$ *2 2 ?f5-f*

have *f5*: ((*UnitDelay 1.0* ;; *LopNOT*)
$\|_B$
(*UnitDelay 0*) (∗ *Delay2* ∗))
= *?f4* $\|_B$ (*UnitDelay 0*)

```
  using f4 f4-0 by auto
then have f5-0: ... = FBlock (λx n. True) 2 2
    (λx n. (((?f4-f ∘ (λxx nn. take 1 (xx nn))) x n) •
          ((f-UnitDelay 0 ∘ (λxx nn. drop 1 (xx nn)))) x n))
  using simblock-f4 SimBlock-UnitDelay FBlock-parallel-comp apply (simp add: UnitDelay-def)
  by (simp add: numeral-2-eq-2)
then have f5-1: ... = ?f5
  proof −
    have ∀ x n. (λx n. (((?f4-f ∘ (λxx nn. take 1 (xx nn))) x n) •
          ((f-UnitDelay 0 ∘ (λxx nn. drop 1 (xx nn)))) x n))  x n
      = ?f5-f x n
      using f-UnitDelay-def apply (simp)
      apply (rule allI)+
      apply (rule conjI, clarify)
      apply (simp add: drop-Suc hd-take-m)
      by (simp add: drop-Suc hd-take-m)
    then show ?thesis
      by presburger
  qed
have simblock-f5: SimBlock 2 2 ?f5
  using simblock-f4 SimBlock-UnitDelay SimBlock-FBlock-parallel-comp f5 f5-0 f5-1
  by (metis (no-types, lifting) Suc-1 Suc-eq-plus1 UnitDelay-def)

let ?f6-f = (λx n. [hd(x n), hd(tl(x n)), hd(x n),
        if (n > 0 ∧ (x (n−1))!2 = 4) then 1::real else 0,
        if (x n)!2 = 8 then 1 else 0,
        (if n = 0 then 0 else (if (x (n − 1))!3 = 0 then 1 else 0)),
        if n = 0 then 0 else (x (n − 1))!4])
let ?f6 = FBlock (λx n. True) 5 7 ?f6-f
have f6: ((((
        Split2 (∗ door-closed (boolean, 1/10s) is split into two ∗)
        ‖B
        Id (∗ door-open-time: double ∗)
        ) ; ;  Router 3 [0,2,1])
        ‖B
        post-mode
      )
      ‖B
      (
        (UnitDelay 1.0 ; ;  LopNOT)
        ‖B
        (UnitDelay 0) (∗ Delay2 ∗)
      ))
  = ?f3 ‖B ?f5
  by (smt Suc3-eq-add-3 Suc-eq-plus1 add-2-eq-Suc eval-nat-numeral(3) f1 f1-0 f2-0 f2-1 f3-0
      f3-1 f4 f4-0 f5-0 f5-1 numeral-Bit0 post-mode-simp)
then have f6-0: ... = FBlock (λx n. True) (3 + 2) (5 + 2)
    (λx n. (((?f3-f ∘ (λxx nn. take 3 (xx nn))) x n) •
          ((?f5-f ∘ (λxx nn. drop 3 (xx nn)))) x n))
  using simblock-f3 simblock-f5 FBlock-parallel-comp by (simp)
then have f6-1: ... = FBlock (λx n. True) (3 + 2) (5 + 2) ?f6-f
  proof −
    show ?thesis
      apply (simp add: FBlock-def)
      apply (rel-simp)
```

apply (*rule conjI*, *clarify*, *rule iffI*)
apply (*clarify*)
defer
apply (*clarify*)
defer
apply (*clarify*, *rule iffI*)
apply (*clarify*)
defer
apply (*clarify*)
defer
proof −
fix ok_v **and** $inouts_v$::*nat*⇒*real list* **and** ok_v' **and** $inouts_v'$::*nat*⇒*real list* **and** *x*::*nat*
assume *a1*: ∀ *x*. (*x* = *0* ⟶
length($inouts_v$ *0*) = *5* ∧
length($inouts_v'$ *0*) = *7* ∧
[*hd* (*take 3* ($inouts_v$ *0*)), *hd* (*tl* (*take 3* ($inouts_v$ *0*))), *hd* (*take 3* ($inouts_v$ *0*)), *0*, *1*, *0*, *0*] =
$inouts_v'$ *0*) ∧
(*0* < *x* ⟶
(*hd* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))) = *0* ⟶
($inouts_v$ *x*!(*2*) = *8* ⟶
($inouts_v$ (*x* − *Suc 0*)!(*2*) = *4* ⟶
length($inouts_v$ *x*) = *5* ∧
length($inouts_v'$ *x*) = *7* ∧
[*hd* (*take 3* ($inouts_v$ *x*)), *hd* (*tl* (*take 3* ($inouts_v$ *x*))), *hd* (*take 3* ($inouts_v$ *x*)), *1*, *1*, *1*,
hd (*tl* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))))] =
$inouts_v'$ *x*) ∧
(¬ $inouts_v$ (*x* − *Suc 0*)!(*2*) = *4* ⟶
length($inouts_v$ *x*) = *5* ∧
length($inouts_v'$ *x*) = *7* ∧
[*hd* (*take 3* ($inouts_v$ *x*)), *hd* (*tl* (*take 3* ($inouts_v$ *x*))), *hd* (*take 3* ($inouts_v$ *x*)), *0*, *1*, *1*,
hd (*tl* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))))] =
$inouts_v'$ *x*)) ∧
(¬ $inouts_v$ *x*!(*2*) = *8* ⟶
($inouts_v$ (*x* − *Suc 0*)!(*2*) = *4* ⟶
length($inouts_v$ *x*) = *5* ∧
length($inouts_v'$ *x*) = *7* ∧
[*hd* (*take 3* ($inouts_v$ *x*)), *hd* (*tl* (*take 3* ($inouts_v$ *x*))), *hd* (*take 3* ($inouts_v$ *x*)), *1*, *0*, *1*,
hd (*tl* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))))] =
$inouts_v'$ *x*) ∧
(¬ $inouts_v$ (*x* − *Suc 0*)!(*2*) = *4* ⟶
length($inouts_v$ *x*) = *5* ∧
length($inouts_v'$ *x*) = *7* ∧
[*hd* (*take 3* ($inouts_v$ *x*)), *hd* (*tl* (*take 3* ($inouts_v$ *x*))), *hd* (*take 3* ($inouts_v$ *x*)), *0*, *0*, *1*,
hd (*tl* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))))] =
$inouts_v'$ *x*))) ∧
(¬ *hd* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))) = *0* ⟶
($inouts_v$ *x*!(*2*) = *8* ⟶
($inouts_v$ (*x* − *Suc 0*)!(*2*) = *4* ⟶
length($inouts_v$ *x*) = *5* ∧
length($inouts_v'$ *x*) = *7* ∧
[*hd* (*take 3* ($inouts_v$ *x*)), *hd* (*tl* (*take 3* ($inouts_v$ *x*))), *hd* (*take 3* ($inouts_v$ *x*)), *1*, *1*, *0*,
hd (*tl* (*drop 3* ($inouts_v$ (*x* − *Suc 0*))))] =
$inouts_v'$ *x*) ∧
(¬ $inouts_v$ (*x* − *Suc 0*)!(*2*) = *4* ⟶
length($inouts_v$ *x*) = *5* ∧

$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x))))$

from *a1* **have** *len-5*: $\forall x.\ length(inouts_v\ x) = 5$
by (*metis neq0-conv*)
have *hd-take-3*: $hd\ (take\ 3\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-5* **by** (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *hd-tl-take-3*: $hd\ (tl\ (take\ 3\ (inouts_v\ x))) = hd\ (tl\ (inouts_v\ x))$
using *len-5* **by** (*simp add*: *hd-tl-take-m*)
have *hd-drop-3*: $hd\ (drop\ 3\ (inouts_v\ x)) = inouts_v\ x!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-drop-3'*: $hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = inouts_v\ (x - Suc\ 0)!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-tl-drop-3*: $hd\ (tl\ (drop\ 3\ (inouts_v\ x))) = inouts_v\ x!(4)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth nth-tl tl-drop*)
have *hd-tl-drop-3'*: $hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0)))) = inouts_v\ (x - Suc\ 0)!(4)$
using *len-5*
by (*metis drop-Suc eval-nat-numeral(2) eval-nat-numeral(3) hd-drop-conv-nth lessI*
semiring-norm(26) semiring-norm(27) tl-drop)
show $(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 1,\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(0 < x \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$

$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x))) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x))))$
using *a1 hd-take-3 hd-tl-take-3 hd-drop-3' hd-tl-drop-3'* **by** (*smt*)

next

fix ok_v **and** $inouts_v$::*nat*⇒*real list* **and** ok_v' **and** $inouts_v'$::*nat*⇒*real list* **and** x::*nat*

assume *a1*: $\forall x.\ (x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 1,\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(0 < x \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$

$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] = inouts_v'\ x))) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] = inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] = inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] = inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] = inouts_v'\ x))))$
from *a1* **have** *len-5*: $\forall x.\ length(inouts_v\ x) = 5$
by (*metis neq0-conv*)
have *hd-take-3*: $hd\ (take\ 3\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-5* **by** (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *hd-tl-take-3*: $hd\ (tl\ (take\ 3\ (inouts_v\ x))) = hd\ (tl\ (inouts_v\ x))$
using *len-5* **by** (*simp add*: *hd-tl-take-m*)
have *hd-drop-3*: $hd\ (drop\ 3\ (inouts_v\ x)) = inouts_v\ x!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-drop-3'*: $hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = inouts_v\ (x - Suc\ 0)!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-tl-drop-3*: $hd\ (tl\ (drop\ 3\ (inouts_v\ x))) = inouts_v\ x!(4)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth nth-tl tl-drop*)
have *hd-tl-drop-3'*: $hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0)))) = inouts_v\ (x - Suc\ 0)!(4)$
using *len-5*
by (*metis drop-Suc eval-nat-numeral(2) eval-nat-numeral(3) hd-drop-conv-nth lessI semiring-norm(26) semiring-norm(27) tl-drop*)
show $(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 3\ (inouts_v\ 0))),\ hd\ (take\ 3\ (inouts_v\ 0)),\ 0,\ 1,\ 0,\ 0] = inouts_v'\ 0) \wedge$
$(0 < x \longrightarrow$
$(hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$

$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 1,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x))) \wedge$
$(\neg\ hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 1,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x))))$

using *a1 hd-take-3 hd-tl-take-3 hd-drop-3' hd-tl-drop-3'* **by** (*smt*)

next

fix ok_v **and** $inouts_v$::*nat*⇒*real list* **and** ok_v' **and** $inouts_v'$::*nat*⇒*real list* **and** x::*nat*

assume *a1*: $\forall x.\ (x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$

$$
\begin{array}{l}
[hd\ (take\ 3\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 3\ (inouts_v\ 0))),\ hd\ (take\ 3\ (inouts_v\ 0)),\ 0,\ 0,\ 0,\ 0] = \\
\ inouts_v'\ 0\ \wedge \\
\ (\neg\ inouts_v\ 0!(2) = 4\ \longrightarrow \\
\ \ length(inouts_v\ 0) = 5\ \wedge \\
\ \ length(inouts_v'\ 0) = 7\ \wedge \\
\ [hd\ (take\ 3\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 3\ (inouts_v\ 0))),\ hd\ (take\ 3\ (inouts_v\ 0)),\ 0,\ 0,\ 0,\ 0] = \\
\ \ inouts_v'\ 0))\ \wedge \\
(0 < x\ \longrightarrow \\
\ (hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = 0\ \longrightarrow \\
\ \ (inouts_v\ x!(2) = 8\ \longrightarrow \\
\ \ \ (inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 1,\ 1, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] = \\
\ \ \ \ inouts_v'\ x)\ \wedge \\
\ \ \ (\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 1, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] = \\
\ \ \ \ inouts_v'\ x))\ \wedge \\
\ \ (\neg\ inouts_v\ x!(2) = 8\ \longrightarrow \\
\ \ \ (inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 1, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] = \\
\ \ \ \ inouts_v'\ x)\ \wedge \\
\ \ \ (\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 1, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] = \\
\ \ \ \ inouts_v'\ x)))\ \wedge \\
\ (\neg\ hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = 0\ \longrightarrow \\
\ \ (inouts_v\ x!(2) = 8\ \longrightarrow \\
\ \ \ (inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 1,\ 0, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] = \\
\ \ \ \ inouts_v'\ x)\ \wedge \\
\ \ \ (\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 0, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] = \\
\ \ \ \ inouts_v'\ x))\ \wedge \\
\ \ (\neg\ inouts_v\ x!(2) = 8\ \longrightarrow \\
\ \ \ (inouts_v\ (x - Suc\ 0)!(2) = 4\ \longrightarrow \\
\ \ \ \ length(inouts_v\ x) = 5\ \wedge \\
\ \ \ \ length(inouts_v'\ x) = 7\ \wedge \\
\ \ \ \ [hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 0, \\
\ \ \ \ \ hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =
\end{array}
$$

$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x))))$
from *a1* **have** *len-5*: $\forall x.\ length(inouts_v\ x) = 5$
by (*metis neq0-conv*)
have *hd-take-3*: $hd\ (take\ 3\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-5* **by** (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *hd-tl-take-3*: $hd\ (tl\ (take\ 3\ (inouts_v\ x))) = hd\ (tl\ (inouts_v\ x))$
using *len-5* **by** (*simp add*: *hd-tl-take-m*)
have *hd-drop-3*: $hd\ (drop\ 3\ (inouts_v\ x)) = inouts_v\ x!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-drop-3'*: $hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = inouts_v\ (x - Suc\ 0)!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-tl-drop-3*: $hd\ (tl\ (drop\ 3\ (inouts_v\ x))) = inouts_v\ x!(4)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth nth-tl tl-drop*)
have *hd-tl-drop-3'*: $hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0)))) = inouts_v\ (x - Suc\ 0)!(4)$
using *len-5*
by (*metis drop-Suc eval-nat-numeral(2) eval-nat-numeral(3) hd-drop-conv-nth lessI*
semiring-norm(26) semiring-norm(27) tl-drop)
show $(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 0,\ 0,\ 0] = inouts_v'\ 0 \wedge$
$(\neg\ inouts_v\ 0!(2) = 4 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (inouts_v\ 0),\ hd\ (tl\ (inouts_v\ 0)),\ hd\ (inouts_v\ 0),\ 0,\ 0,\ 0,\ 0] = inouts_v'\ 0)) \wedge$
$(0 < x \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x))) \wedge$

$(\neg\ inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 1, 1, 0, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 0, 1, 0, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 1, 0, 0, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 0, 0, 0, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x))))$
using *a1 hd-take-3 hd-tl-take-3 hd-drop-3' hd-tl-drop-3'* **by** (*smt*)

next

fix ok_v **and** $inouts_v$::*nat*⇒*real list* **and** ok_v' **and** $inouts_v'$::*nat*⇒*real list* **and** x::*nat*

assume *a1*: $\forall x.\ (x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (inouts_v\ 0), hd\ (tl\ (inouts_v\ 0)), hd\ (inouts_v\ 0), 0, 0, 0, 0] = inouts_v'\ 0 \wedge$
$(\neg\ inouts_v\ 0!(2) = 4 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (inouts_v\ 0), hd\ (tl\ (inouts_v\ 0)), hd\ (inouts_v\ 0), 0, 0, 0, 0] = inouts_v'\ 0)) \wedge$
$(0 < x \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 1, 1, 1, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 0, 1, 1, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x), hd\ (tl\ (inouts_v\ x)), hd\ (inouts_v\ x), 1, 0, 1, inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$

$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 1,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x))) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(3) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 1,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 1,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 1,\ 0,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (inouts_v\ x),\ hd\ (tl\ (inouts_v\ x)),\ hd\ (inouts_v\ x),\ 0,\ 0,\ 0,\ inouts_v\ (x - Suc\ 0)!(4)] =$
$inouts_v'\ x))))$
from *a1* **have** *len-5*: $\forall x.\ length(inouts_v\ x) = 5$
by (*metis neq0-conv*)
have *hd-take-3*: $hd\ (take\ 3\ (inouts_v\ x)) = hd(inouts_v\ x)$
using *len-5* **by** (*metis append-take-drop-id hd-append2 take-eq-Nil zero-neq-numeral*)
have *hd-tl-take-3*: $hd\ (tl\ (take\ 3\ (inouts_v\ x))) = hd\ (tl\ (inouts_v\ x))$
using *len-5* **by** (*simp add*: *hd-tl-take-m*)
have *hd-drop-3*: $hd\ (drop\ 3\ (inouts_v\ x)) = inouts_v\ x!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-drop-3'*: $hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = inouts_v\ (x - Suc\ 0)!(3)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth*)
have *hd-tl-drop-3*: $hd\ (tl\ (drop\ 3\ (inouts_v\ x))) = inouts_v\ x!(4)$
using *len-5* **by** (*simp add*: *hd-drop-conv-nth nth-tl tl-drop*)
have *hd-tl-drop-3'*: $hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0)))) = inouts_v\ (x - Suc\ 0)!(4)$
using *len-5*
by (*metis drop-Suc eval-nat-numeral(2) eval-nat-numeral(3) hd-drop-conv-nth lessI*
semiring-norm(26) semiring-norm(27) tl-drop)
show $(x = 0 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 3\ (inouts_v\ 0))),\ hd\ (take\ 3\ (inouts_v\ 0)),\ 0,\ 0,\ 0,\ 0] =$
$inouts_v'\ 0 \wedge$
$(\neg\ inouts_v\ 0!(2) = 4 \longrightarrow$
$length(inouts_v\ 0) = 5 \wedge$
$length(inouts_v'\ 0) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ 0)),\ hd\ (tl\ (take\ 3\ (inouts_v\ 0))),\ hd\ (take\ 3\ (inouts_v\ 0)),\ 0,\ 0,\ 0,\ 0] =$
$inouts_v'\ 0)) \wedge$
$(0 < x \longrightarrow$
$(hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$

$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 1,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 1,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x))) \wedge$
$(\neg\ hd\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))) = 0 \longrightarrow$
$(inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 1,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 1,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x)) \wedge$
$(\neg\ inouts_v\ x!(2) = 8 \longrightarrow$
$(inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 1,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ (x - Suc\ 0)!(2) = 4 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 7 \wedge$
$[hd\ (take\ 3\ (inouts_v\ x)),\ hd\ (tl\ (take\ 3\ (inouts_v\ x))),\ hd\ (take\ 3\ (inouts_v\ x)),\ 0,\ 0,\ 0,$
$hd\ (tl\ (drop\ 3\ (inouts_v\ (x - Suc\ 0))))] =$
$inouts_v'\ x))))$
using *a1 hd-take-3 hd-tl-take-3 hd-drop-3' hd-tl-drop-3'* **by** (*smt*)
qed
qed

then have *f6-2*: *... = ?f6*
by (*smt Suc-eq-plus1 add-Suc-right numeral-Bit1 numeral-One one-add-one*)
have *simblock-f6*: *SimBlock 5 7 ?f6*
using *simblock-f3 simblock-f5 SimBlock-FBlock-parallel-comp*
by (*metis* (*no-types*, *lifting*) *Suc-1 Suc-eq-plus1 Suc-numeral add-numeral-left f6-0 f6-1 numeral-Bit1 numeral-One*)

have *ref-f6*: ((∀ *n*::*nat* ⋅ (
«(λ*x n*. ((*hd*(*x n*) = *0* ∨ *hd*(*x n*) = *1*)))»
(&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
⊢$_n$
((∀ *n*::*nat* ⋅
((#$_u$($*inouts* («*n*»)$_a$)) =$_u$ «*5*») ∧
((#$_u$($*inouts*´ («*n*»)$_a$)) =$_u$ «*7*») ∧
(*head*$_u$($*inouts* («*n*»)$_a$) =$_u$ *head*$_u$($*inouts*´ («*n*»)$_a$)) ∧
(*head*$_u$(*tail*$_u$($*inouts* («*n*»)$_a$)) =$_u$ *head*$_u$(*tail*$_u$($*inouts*´ («*n*»)$_a$))))
)) ⊑ *post-landing-finalize-part1*
proof −
have *1*: ((∀ *n*::*nat* ⋅ (
«(λ*x n*. ((*hd*(*x n*) = *0* ∨ *hd*(*x n*) = *1*)))»
(&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
⊢$_n$
((∀ *n*::*nat* ⋅
((#$_u$($*inouts* («*n*»)$_a$)) =$_u$ «*5*») ∧
((#$_u$($*inouts*´ («*n*»)$_a$)) =$_u$ «*7*») ∧
(*head*$_u$($*inouts* («*n*»)$_a$) =$_u$ *head*$_u$($*inouts*´ («*n*»)$_a$)) ∧
(*head*$_u$(*tail*$_u$($*inouts* («*n*»)$_a$)) =$_u$ *head*$_u$(*tail*$_u$($*inouts*´ («*n*»)$_a$))))
)) ⊑ *?f6*
apply (*simp add*: *FBlock-def*)
apply (*rule ndesign-refine-intro*)
apply *simp*
apply (*rel-simp*)
apply (*rule conjI*, *clarify*)
apply (*metis gr-zeroI list.sel*(*1*) *list.sel*(*3*))
apply (*clarify*)
by (*metis gr-zeroI list.sel*(*1*) *list.sel*(*3*))
show *?thesis*
using *1 f6 f6-0 f6-1 f6-2* **by** *simp*
qed

let *?f7-f* = (λ*x n*. [*if hd*(*x n*) = *0 then 1 else 0*, *hd*(*tl*(*x n*))])
let *?f7* = *FBlock* (λ*x n*. *True*) *2 2 ?f7-f*
have *f7*: ((*LopNOT*) ‖$_B$ (*Id*) (∗ *door-open-time*: *double* ∗)) =
FBlock (λ*x n*. *True*) (*1*+*1*) (*1*+*1*)
(λ*x n*. (((*f-LopNOT* ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*) • ((*f-Id* ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*))
using *SimBlock-LopNOT SimBlock-Id FBlock-parallel-comp*
by (*simp add*: *LopNOT-def simu-contract-real.Id-def*)
then have *f7-0*: *... = FBlock* (λ*x n*. *True*) *2 2 ?f7-f*
proof −
have ∀ *x n*. (λ*x n*. (((*f-LopNOT* ∘ (λ*xx nn*. *take 1* (*xx nn*))) *x n*) •
((*f-Id* ∘ (λ*xx nn*. *drop 1* (*xx nn*)))) *x n*)) *x n* = *?f7-f x n*
by (*simp add*: *drop-Suc f-Id-def f-LopNOT-def hd-take-m*)
then show *?thesis*
by (*simp add*: *numeral-2-eq-2*)

```
  qed
 have simblock-f7: SimBlock 2 2 (?f7)
  using SimBlock-LopNOT SimBlock-Id SimBlock-FBlock-parallel-comp
  by (metis (no-types, lifting) LopNOT-def f7 f7-0 one-add-one simu-contract-real.Id-def)


 let ?f8-f = (λx na. [if (if 1 ≤ (if hd(x na) = 0 then 1::real else 0) * 2
            then (if na = 0 then 0
            else min (vT-fd-sol-1
                  (λn1. (λna. real-of-int
                        (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
                  (λn1. (if hd(x n1) = 0 then 1::real else 0)) (na − 1))
              ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
                (na − 1))) + 1
          else 0) > (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
     then 1 else 0])
 let ?f8-f' = (λx na. [if (if hd(x na) = 0
            then (if na = 0 then 0
                 else min (vT-fd-sol-1
                       (λn1. (λna. real-of-int
                             (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
                       (λn1. (if hd(x n1) = 0 then 1::real else 0)) (na − 1))
                   ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0))
0⌉))))
                     (na − 1))) + 1
          else 0) > (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
     then 1 else 0])
 let ?f8 = FBlock (λx n. True) 2 1 ?f8-f'
 have f8: ((LopNOT) ‖B (Id) (* door-open-time: double *)) ; ; variableTimer
  = ?f7 ; ; variableTimer-simp-pat
  using variableTimer-simp f7 f7-0 by auto
 then have f8-0: ... = FBlock (λx n. True) 2 1 (variableTimer-simp-pat-f o ?f7-f)
  using simblock-f7 SimBlock-variableTimer-simp FBlock-seq-comp by blast
 then have f8-1: ... = ?f8
  proof −
   show ?thesis
    apply (simp add: FBlock-def)
    apply (rel-simp)
    apply (rule iffI)
    apply (clarify)
    defer
    apply (clarify)
    defer
    proof −
     fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list and x::nat
     assume a1: ∀x. (x = 0 ⟶
      (hd (inouts_v 0) = 0 ⟶
       (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v 0))) 0⌉)) < 1 ⟶
        length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
       (¬ int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v 0))) 0⌉)) < 1 ⟶
        length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0)) ∧
      (¬ hd (inouts_v 0) = 0 ⟶
       (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v 0))) 0⌉)) < 0 ⟶
        length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
       (¬ int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v 0))) 0⌉)) < 0 ⟶
```

```
        length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0))) ∧
      (0 < x ⟶
       (hd (inouts_v x) = 0 ⟶
        (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v x))) 0⌉))
         < min (vT-fd-sol-1
                (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v n1)))
0⌉))))
                (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
          (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v (x − Suc 0))))
0⌉))) +
          1 ⟶
          length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [1] = inouts_v' x) ∧
          (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v x))) 0⌉)))
             < min (vT-fd-sol-1
                    (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v
n1))) 0⌉))))
                    (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
              (real-of-int
              (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v (x − Suc 0)))) 0⌉)))) +
              1 ⟶
              length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)) ∧
          (¬ hd (inouts_v x) = 0 ⟶
           (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v x))) 0⌉)) < 0 ⟶
            length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [1] = inouts_v' x) ∧
           (¬ int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v x))) 0⌉)) < 0 ⟶
            length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)))
    from a1 have len-2: ∀ x. length(inouts_v x) = 2
      by (metis (no-types, lifting) gr-zeroI)
    have hd-tl-2: hd (tl (inouts_v x)) = inouts_v x!(Suc 0)
      using len-2
      by (metis Suc-1 diff-Suc-1 hd-conv-nth length-tl less-numeral-extra(1) list.size(3)
       nth-tl zero-neq-one)
    have hd-tl-2': ∀ x. hd (tl (inouts_v x)) = inouts_v x!(Suc 0)
      using len-2
        by (metis Suc-1 diff-Suc-1 hd-conv-nth length-tl less-numeral-extra(1) list.size(3) nth-tl
zero-neq-one)
    have hd-tl-2'': (hd (tl (inouts_v (x − Suc 0)))) = (inouts_v (x − Suc 0)!(Suc 0))
      using len-2 using hd-tl-2' by blast
    from a1 have a1': ∀ x. (x = 0 ⟶
       (hd (inouts_v 0) = 0 ⟶
        (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 1 ⟶
         length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
        (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 1 ⟶
         length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0)) ∧
       (¬ hd (inouts_v 0) = 0 ⟶
        (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 0 ⟶
         length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
        (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 0 ⟶
         length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0))) ∧
       (0 < x ⟶
        (hd (inouts_v x) = 0 ⟶
         (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
          < min (vT-fd-sol-1
                 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0))
0⌉))))
```

$(\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0))$
$(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil)))) +$
$1 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [1] = \mathit{inouts}_v'\ x) \wedge$
$(\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)))$
$< \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1}$
$(\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil))))$
$(\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0))$
$(\mathit{real\text{-}of\text{-}int}$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil))) +$
$1 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [0] = \mathit{inouts}_v'\ x)) \wedge$
$(\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [1] = \mathit{inouts}_v'\ x) \wedge$
$(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [0] = \mathit{inouts}_v'\ x)))$
using *hd-tl-2'* **by** *presburger*
show $(x = 0 \longrightarrow$
$(\mathit{hd}\ (\mathit{inouts}_v\ 0) = 0 \longrightarrow$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil)) < 1 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ 0) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ 0) = \mathit{Suc}\ 0 \wedge [1] = \mathit{inouts}_v'\ 0) \wedge$
$(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil)) < 1 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ 0) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ 0) = \mathit{Suc}\ 0 \wedge [0] = \mathit{inouts}_v'\ 0)) \wedge$
$(\neg\ \mathit{hd}\ (\mathit{inouts}_v\ 0) = 0 \longrightarrow$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ 0) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ 0) = \mathit{Suc}\ 0 \wedge [1] = \mathit{inouts}_v'\ 0) \wedge$
$(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ 0) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ 0) = \mathit{Suc}\ 0 \wedge [0] = \mathit{inouts}_v'\ 0))) \wedge$
$(0 < x \longrightarrow$
$(\mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow$
$(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)))$
$< \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1}$
$(\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil))))$
$(\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0))$
$(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil)))) +$
$1 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [1] = \mathit{inouts}_v'\ x) \wedge$
$(\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)))$
$< \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1}$
$(\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil))))$
$(\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0))$
$(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil)))) +$
$1 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [0] = \mathit{inouts}_v'\ x)) \wedge$
$(\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 2 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = \mathit{Suc}\ 0 \wedge [1] = \mathit{inouts}_v'\ x) \wedge$
$(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$

```
    length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)))
  using a1' by blast
next
  fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list and x::nat
  assume a1: ∀x. (x = 0 ⟶
   (hd (inouts_v 0) = 0 ⟶
    (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 1 ⟶
     length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
    (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 1 ⟶
     length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0)) ∧
   (¬ hd (inouts_v 0) = 0 ⟶
    (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 0 ⟶
     length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
    (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v 0!(Suc 0)) 0⌉)) < 0 ⟶
     length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [0] = inouts_v' 0))) ∧
  (0 < x ⟶
   (hd (inouts_v x) = 0 ⟶
    (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
    < min (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v
n1!(Suc 0)) 0⌉)))))
          (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
      (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0))
0⌉)))) +
     1 ⟶
     length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [1] = inouts_v' x) ∧
    (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
        < min (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max
(inouts_v n1!(Suc 0)) 0⌉)))))
          (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
      (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc
0)) 0⌉)))) +
       1 ⟶
     length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)) ∧
   (¬ hd (inouts_v x) = 0 ⟶
    (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
     length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [1] = inouts_v' x) ∧
    (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
     length(inouts_v x) = 2 ∧ length(inouts_v' x) = Suc 0 ∧ [0] = inouts_v' x)))
from a1 have len-2: ∀x. length(inouts_v x) = 2
  by (metis (no-types, lifting) gr-zeroI)
have hd-tl-2: hd (tl (inouts_v x)) = inouts_v x!(Suc 0)
  using len-2
  by (metis Suc-1 diff-Suc-1 hd-conv-nth length-tl less-numeral-extra(1) list.size(3)
   nth-tl zero-neq-one)
have hd-tl-2': ∀x. hd (tl (inouts_v x)) = inouts_v x!(Suc 0)
  using len-2
    by (metis Suc-1 diff-Suc-1 hd-conv-nth length-tl less-numeral-extra(1) list.size(3) nth-tl
zero-neq-one)
have hd-tl-2'': (hd (tl (inouts_v (x − Suc 0)))) = (inouts_v (x − Suc 0)!(Suc 0))
  using len-2 using hd-tl-2' by blast
from a1 have a1': ∀x. (x = 0 ⟶
   (hd (inouts_v 0) = 0 ⟶
    (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v 0))) 0⌉)) < 1 ⟶
     length(inouts_v 0) = 2 ∧ length(inouts_v' 0) = Suc 0 ∧ [1] = inouts_v' 0) ∧
    (¬ int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts_v 0))) 0⌉)) < 1 ⟶
```

$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [0] = inouts_v'\ 0)) \wedge$
$(\neg\ hd\ (inouts_v\ 0) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ 0)))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [1] = inouts_v'\ 0) \wedge$
$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ 0)))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [0] = inouts_v'\ 0))) \wedge$
$(0 < x \longrightarrow$
$(hd\ (inouts_v\ x) = 0 \longrightarrow$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ x)))\ 0\rceil)))$
$< min\ (vT\text{-}fd\text{-}sol\text{-}1\ (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl$
$(inouts_v\ n1)))\ 0\rceil))))$
$(\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ (x - Suc\ 0))))$
$0\rceil))) +$
$1 \longrightarrow$
$length(inouts_v\ x) = 2 \wedge length(inouts_v'\ x) = Suc\ 0 \wedge [1] = inouts_v'\ x) \wedge$
$(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ x)))\ 0\rceil)))$
$< min\ (vT\text{-}fd\text{-}sol\text{-}1\ (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd$
$(tl\ (inouts_v\ n1)))\ 0\rceil))))$
$(\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ (x - Suc$
$0))))\ 0\rceil))) +$
$1 \longrightarrow$
$length(inouts_v\ x) = 2 \wedge length(inouts_v'\ x) = Suc\ 0 \wedge [0] = inouts_v'\ x)) \wedge$
$(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ x)))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ x) = 2 \wedge length(inouts_v'\ x) = Suc\ 0 \wedge [1] = inouts_v'\ x) \wedge$
$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ x)))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ x) = 2 \wedge length(inouts_v'\ x) = Suc\ 0 \wedge [0] = inouts_v'\ x)))$
using *hd-tl-2'* **by** *presburger*
show $(x = 0 \longrightarrow$
$(hd\ (inouts_v\ 0) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ 0)))\ 0\rceil)) < 1 \longrightarrow$
$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [1] = inouts_v'\ 0) \wedge$
$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ 0)))\ 0\rceil)) < 1 \longrightarrow$
$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [0] = inouts_v'\ 0)) \wedge$
$(\neg\ hd\ (inouts_v\ 0) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ 0)))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [1] = inouts_v'\ 0) \wedge$
$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ 0)))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ 0) = 2 \wedge length(inouts_v'\ 0) = Suc\ 0 \wedge [0] = inouts_v'\ 0))) \wedge$
$(0 < x \longrightarrow$
$(hd\ (inouts_v\ x) = 0 \longrightarrow$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ x)))\ 0\rceil)))$
$< min\ (vT\text{-}fd\text{-}sol\text{-}1\ (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl$
$(inouts_v\ n1)))\ 0\rceil))))$
$(\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ (x - Suc\ 0))))$
$0\rceil))) +$
$1 \longrightarrow$
$length(inouts_v\ x) = 2 \wedge length(inouts_v'\ x) = Suc\ 0 \wedge [1] = inouts_v'\ x) \wedge$
$(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl\ (inouts_v\ x)))\ 0\rceil)))$
$< min\ (vT\text{-}fd\text{-}sol\text{-}1\ (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (hd\ (tl$
$(inouts_v\ n1)))\ 0\rceil))))$
$(\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))$

(real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts$_v$ (x − Suc 0)))) 0⌉)))) +
1 ⟶
length(inouts$_v$ x) = 2 ∧ length(inouts$_v$' x) = Suc 0 ∧ [0] = inouts$_v$' x)) ∧
(¬ hd (inouts$_v$ x) = 0 ⟶
(int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts$_v$ x))) 0⌉)) < 0 ⟶
length(inouts$_v$ x) = 2 ∧ length(inouts$_v$' x) = Suc 0 ∧ [1] = inouts$_v$' x) ∧
(¬ int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (inouts$_v$ x))) 0⌉)) < 0 ⟶
length(inouts$_v$ x) = 2 ∧ length(inouts$_v$' x) = Suc 0 ∧ [0] = inouts$_v$' x)))
using *hd-tl-2' a1'* **by** *blast*
qed
qed
then have *f8-2*: ... = *FBlock* (λx n. *True*) *2 1 ?f8-f'*
proof −
have ∀ x na. (*1* ≤ (*if* hd(x na) = *0 then 1*::*real else 0*) * *2*) = (hd(x na) = *0*)
by *simp*
then show *?thesis*
proof −
have *FBlock* (λf n. *True*) *2 1* (λf n. [*if*
real-of-int (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) * *max* (*f n*!(*Suc 0*)) *0*⌉))) <
(*if* (*1*::*real*) ≤ (*if hd* (*f n*) = *0 then 1 else 0*) * *2 then* (*if n* = *0 then 0 else*
min (*vT-fd-sol-1* (λn. *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) *
max (*f n*!(*Suc 0*)) *0*⌉)))))
(λn. *if hd* (*f n*) = *0 then 1 else 0*) (*n* − *1*)) (*real-of-int* (*int32* (*RoundZero* (*real-of-int*
⌈(*Rate*::*real*) * *max* (*f* (*n* − *1*)!(*Suc 0*)) *0*⌉))))) + *1 else 0*) *then 1 else 0*]) =
FBlock (λf n. *True*) *2 1* (λf n. [*if real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*)
* *max* (*f n*!(*Suc 0*)) *0*⌉))) < (*if hd* (*f n*) = *0 then* (*if n* = *0 then 0 else min* (*vT-fd-sol-1*
(λn. *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) * *max* (*f n*!(*Suc 0*)) *0*⌉))))
(λn. *if hd* (*f n*) = *0 then 1 else 0*) (*n* − *1*)) (*real-of-int* (*int32* (*RoundZero* (*real-of-int*
⌈(*Rate*::*real*) * *max* (*f* (*n* − *1*)!(*Suc 0*)) *0*⌉))))) + *1 else 0*) *then 1 else 0*]) ∨
(∀ f n. [*if real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) * *max* (*f n*!(*Suc 0*)) *0*⌉))) <
(*if* (*1*::*real*) ≤ (*if hd* (*f n*) = (*0*::*real*) *then 1 else 0*) * *2 then* (*if n* = *0 then 0 else min*
(*vT-fd-sol-1* (λn. *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) *
max (*f n*!(*Suc 0*)) *0*⌉)))) (λn. *if hd* (*f n*) = *0 then 1 else 0*) (*n* − *1*))
(*real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) * *max* (*f* (*n* − *1*)!(*Suc 0*)) *0*⌉))))
+ *1 else 0*)
then 1::*real else 0*] = [*if real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) *
max (*f n*!(*Suc 0*)) *0*⌉))) < (*if hd* (*f n*) = *0 then* (*if n* = *0 then 0 else min* (*vT-fd-sol-1*
(λn. *real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈(*Rate*::*real*) * *max* (*f n*!(*Suc 0*)) *0*⌉))))
(λn. *if hd* (*f n*) = *0 then 1 else 0*) (*n* − *1*)) (*real-of-int* (*int32* (*RoundZero* (*real-of-int*
⌈(*Rate*::*real*) * *max* (*f* (*n* − *1*)!(*Suc 0*)) *0*⌉))))) + *1 else 0*) *then 1 else 0*])
by *auto*
then show *?thesis*
by *force*
qed
qed
have *simblock-f8*: *SimBlock 2 1* (*FBlock* (λx n. *True*) *2 1 ?f8-f'*)
using *simblock-f7 SimBlock-variableTimer-simp SimBlock-FBlock-seq-comp f8-0 f8-1 f8-2* **by** *fastforce*

let *?f9-f* = (λx n. [*if* (x n)!*0* = *0* ∨ (x n)!*1* = *0* ∨ (x n)!*2* = *0 then 0 else 1*,
if (x n)!*3* = *0* ∧ (x n)!*4* = *0 then 0 else 1*])
let *?f9* = *FBlock* (λx n. *True*) *5 2 ?f9-f*
have *f9*: ((*LopAND 3*) ‖$_B$ (*LopOR 2*)) = *FBlock* (λx n. *True*) (*3*+*2*) (*1*+*1*)
(λx n. (((*f-LopAND* ∘ (λxx nn. *take 3* (*xx nn*))) x n) •

```
          ((f-LopOR ∘ (λxx nn. drop 3 (xx nn)))) x n))
    using SimBlock-LopAND SimBlock-LopOR FBlock-parallel-comp
    by (simp add: LopAND-def LopOR-def)
  then have f9-0: ... = FBlock (λx n. True) (3+2) (1+1) ?f9-f
    proof −
      show ?thesis
        apply (simp add: FBlock-def f-LopAND-def f-LopOR-def)
        apply (rel-simp)
        apply (rule iffI)
        apply (clarify)
        defer
        apply (clarify)
        defer
        proof −
          fix ok_v and inouts_v::nat⇒real list and ok_v' and inouts_v'::nat⇒real list and x::nat
          assume a1: ∀x. (LOr (drop 3 (inouts_v x)) ⟶
            (LAnd (take 3 (inouts_v x)) ⟶
             length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [1, 1] = inouts_v' x) ∧
            (¬ LAnd (take 3 (inouts_v x)) ⟶
             length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [0, 1] = inouts_v' x)) ∧
           (¬ LOr (drop 3 (inouts_v x)) ⟶
            (LAnd (take 3 (inouts_v x)) ⟶
             length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [1, 0] = inouts_v' x) ∧
            (¬ LAnd (take 3 (inouts_v x)) ⟶
             length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [0, 0] = inouts_v' x))
          from a1 have len-5: ∀x. length(inouts_v x) = 5
            by blast
          have take-3: take 3 (inouts_v x) = [(inouts_v x)!0, (inouts_v x)!1, (inouts_v x)!2]
            using len-5 by (smt Cons-nth-drop-Suc Suc-1 Suc-eq-plus1 Suc-mono add-Suc-right
                add-diff-cancel-right' drop-0 numeral-3-eq-3 numeral-Bit1 numeral-eq-one-iff
                  numeral-plus-one take-Suc-Cons take-eq-Nil zero-less-numeral)
          have land-take-3:
             LAnd (take 3 (inouts_v x)) = (¬ ((inouts_v x)!0 = 0 ∨ (inouts_v x)!1 = 0 ∨ (inouts_v x)!2
= 0))
            by (simp add: take-3)
          have drop-3: drop 3 (inouts_v x) = [(inouts_v x)!3, (inouts_v x)!4]
            using len-5
            by (metis Cons-nth-drop-Suc add-Suc cancel-ab-semigroup-add-class.add-diff-cancel-left'
            drop-eq-Nil eval-nat-numeral(2) eval-nat-numeral(3) lessI numeral-Bit0 order-refl pos2
            semiring-norm(26) semiring-norm(27) zero-less-diff)
          have lor-drop-3: LOr (drop 3 (inouts_v x)) = (¬((inouts_v x)!3 = 0 ∧ (inouts_v x)!4 = 0))
            by (simp add: drop-3)
          show (inouts_v x!(3) = 0 ∧ inouts_v x!(4) = 0 ⟶
            (inouts_v x!(0) = 0 ⟶ length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [0, 0]
= inouts_v' x) ∧
             (inouts_v x!(Suc 0) = 0 ⟶ length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧
[0, 0] = inouts_v' x) ∧
            (inouts_v x!(2) = 0 ⟶ length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [0, 0]
= inouts_v' x) ∧
            (¬ inouts_v x!(0) = 0 ∧ ¬ inouts_v x!(Suc 0) = 0 ∧ ¬ inouts_v x!(2) = 0 ⟶
             length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [1, 0] = inouts_v' x)) ∧
           ((inouts_v x!(3) = 0 ⟶ ¬ inouts_v x!(4) = 0) ⟶
            (inouts_v x!(0) = 0 ⟶ length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧ [0, 1]
= inouts_v' x) ∧
            (inouts_v x!(Suc 0) = 0 ⟶ length(inouts_v x) = 5 ∧ length(inouts_v' x) = Suc (Suc 0) ∧
```

$[0, 1] = inouts_v'\ x) \wedge$
$(inouts_v\ x!(2) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 1] = inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ x!(0) = 0 \wedge \neg\ inouts_v\ x!(Suc\ 0) = 0 \wedge \neg\ inouts_v\ x!(2) = 0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [1, 1] = inouts_v'\ x))$
using *land-take-3 lor-drop-3 a1 len-5* **by** *simp*

next

fix ok_v **and** $inouts_v$::*nat*⇒*real list* **and** ok_v' **and** $inouts_v'$::*nat*⇒*real list* **and** x::*nat*

assume *a1*: $\forall x.\ (inouts_v\ x!(3) = 0 \wedge inouts_v\ x!(4) = 0 \longrightarrow$
$(inouts_v\ x!(0) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 0] = inouts_v'\ x) \wedge$
$(inouts_v\ x!(Suc\ 0) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 0] = inouts_v'\ x) \wedge$
$(inouts_v\ x!(2) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 0] = inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ x!(0) = 0 \wedge \neg\ inouts_v\ x!(Suc\ 0) = 0 \wedge \neg\ inouts_v\ x!(2) = 0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [1, 0] = inouts_v'\ x)) \wedge$
$((inouts_v\ x!(3) = 0 \longrightarrow \neg\ inouts_v\ x!(4) = 0) \longrightarrow$
$(inouts_v\ x!(0) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 1] = inouts_v'\ x) \wedge$
$(inouts_v\ x!(Suc\ 0) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 1] = inouts_v'\ x) \wedge$
$(inouts_v\ x!(2) = 0 \longrightarrow length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 1] = inouts_v'\ x) \wedge$
$(\neg\ inouts_v\ x!(0) = 0 \wedge \neg\ inouts_v\ x!(Suc\ 0) = 0 \wedge \neg\ inouts_v\ x!(2) = 0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [1, 1] = inouts_v'\ x))$

from *a1* **have** *len-5*: $\forall x.\ length(inouts_v\ x) = 5$
by *blast*

have *take-3*: $take\ 3\ (inouts_v\ x) = [(inouts_v\ x)!0, (inouts_v\ x)!1, (inouts_v\ x)!2]$
using *len-5* **by** (*smt Cons-nth-drop-Suc Suc-1 Suc-eq-plus1 Suc-mono add-Suc-right add-diff-cancel-right' drop-0 numeral-3-eq-3 numeral-Bit1 numeral-eq-one-iff numeral-plus-one take-Suc-Cons take-eq-Nil zero-less-numeral*)

have *land-take-3*:
$LAnd\ (take\ 3\ (inouts_v\ x)) = (\neg\ ((inouts_v\ x)!0 = 0 \vee (inouts_v\ x)!1 = 0 \vee (inouts_v\ x)!2 = 0))$
by (*simp add*: *take-3*)

have *drop-3*: $drop\ 3\ (inouts_v\ x) = [(inouts_v\ x)!3, (inouts_v\ x)!4]$
using *len-5*
by (*metis Cons-nth-drop-Suc add-Suc cancel-ab-semigroup-add-class.add-diff-cancel-left' drop-eq-Nil eval-nat-numeral(2) eval-nat-numeral(3) lessI numeral-Bit0 order-refl pos2 semiring-norm(26) semiring-norm(27) zero-less-diff*)

have *lor-drop-3*: $LOr\ (drop\ 3\ (inouts_v\ x)) = (\neg((inouts_v\ x)!3 = 0 \wedge (inouts_v\ x)!4 = 0))$
by (*simp add*: *drop-3*)

show $(LOr\ (drop\ 3\ (inouts_v\ x)) \longrightarrow$
$(LAnd\ (take\ 3\ (inouts_v\ x)) \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [1, 1] = inouts_v'\ x) \wedge$
$(\neg\ LAnd\ (take\ 3\ (inouts_v\ x)) \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 1] = inouts_v'\ x)) \wedge$
$(\neg\ LOr\ (drop\ 3\ (inouts_v\ x)) \longrightarrow$
$(LAnd\ (take\ 3\ (inouts_v\ x)) \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [1, 0] = inouts_v'\ x) \wedge$
$(\neg\ LAnd\ (take\ 3\ (inouts_v\ x)) \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = Suc\ (Suc\ 0) \wedge [0, 0] = inouts_v'\ x))$
using *land-take-3 lor-drop-3 a1 len-5* **by** *simp*

qed

```
  qed
then have f9-1: ... = ?f9
  by (metis (no-types, lifting) Suc-eq-plus1 add-Suc nat-1-add-1 numeral-2-eq-2
      numeral-3-eq-3 numeral-code(3))
have simblock-f9: SimBlock 5 2 ?f9
  using SimBlock-LopAND SimBlock-LopOR SimBlock-FBlock-parallel-comp f9-0 f9-1 f9
  by (smt LopAND-def LopOR-def One-nat-def Suc-eq-plus1 add-Suc numeral-3-eq-3 numeral-Bit1
      one-add-one zero-less-numeral)

let ?f10-f = (λx na. [latch-rec-calc-output
              (λn1. (if (x n1)!0 = 0 ∨ (x n1)!1 = 0 ∨ (x n1)!2 = 0 then 0 else 1::real))
              (λn1. (if (x n1)!3 = 0 ∧ (x n1)!4 = 0 then 0 else 1::real))
              (na)])
let ?f10 = FBlock (λx n. True) 5 1 ?f10-f
have f10: (((LopAND 3) ‖B (LopOR 2)) ;; latch) = ?f9 ;; latch-simp-pat'
  using latch-simp f9 f9-0 f9-1 by simp
then have f10-0: ... = FBlock (λx n. True) 5 1 (latch-simp-pat-f' o ?f9-f)
  using simblock-f9 FBlock-seq-comp SimBlock-latch-simp' by blast
then have f10-1: ... = FBlock (λx n. True) 5 1 ?f10-f
  proof −
    have 1: ∀ x n. (latch-simp-pat-f' o ?f9-f) x n = ?f10-f x n
      by (simp)
    then have 2: (latch-simp-pat-f' o ?f9-f) = ?f10-f
      using fun-eq by blast
    show ?thesis
      using 2 by (rule FBlock-eq)
  qed
have simblock-f10: SimBlock 5 1 ?f10
  using simblock-f9 SimBlock-latch-simp' SimBlock-FBlock-seq-comp f10-0 f10-1 by fastforce

let ?f11-f = (λx na. [if (if hd(x na) = 0
            then (if na = 0 then 0
                  else min (vT-fd-sol-1
                        (λn1. (λna. real-of-int
                              (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
                        (λn1. (if hd(x n1) = 0 then 1::real else 0)) (na − 1))
                       ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0))
0⌉))))
                        (na − 1))) + 1
          else 0) > (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
      then 1 else 0,
      latch-rec-calc-output
              (λn1. (if (x n1)!2 = 0 ∨ (x n1)!3 = 0 ∨ (x n1)!4 = 0 then 0 else 1::real))
              (λn1. (if (x n1)!5 = 0 ∧ (x n1)!6 = 0 then 0 else 1::real))
              (na)])
let ?f11 = FBlock (λx n. True) 7 2 ?f11-f

have f11: ((((LopNOT) ‖B (Id) (* door-open-time: double *) ) ;; variableTimer )
          ‖B
         (((LopAND 3) ‖B(LopOR 2)) ;; latch))
    = ?f8 ‖B ?f10
  using f10 f10-0 f10-1 f8 f8-0 f8-1 by auto
then have f11-0: ... = FBlock (λx n. True) (2+5) (1+1)
   (λx n. (((?f8-f' ∘ (λxx nn. take 2 (xx nn))) x n) • ((?f10-f ∘ (λxx nn. drop 2 (xx nn)))) x n))
  using simblock-f8 simblock-f10 FBlock-parallel-comp by blast
```

```
  then have f11-1: ... = FBlock (λx n. True) (2+5) (1+1) ?f11-f
   proof −
    show ?thesis
     apply (rule FBlock-eq'')
     defer
     apply auto[1]
     apply auto[1]
     apply (rule allI)+
     apply (clarify)
     proof −
      fix x::nat ⇒ real list and n::nat
      assume a1: ∀ n. length(x n) = 2 + 5
      have hd-take-2: ∀ n. hd (take 2 (x n)) = hd (x n)
       by (simp add: hd-take-m)
      have drop-2-0: ∀ n. drop 2 (x n)!0 = (x n)!2
       using a1 by simp
      have drop-2-1: ∀ n. drop 2 (x n)!1 = (x n)!3
       using a1 by simp
      have drop-2-1': ∀ n. drop 2 (x n)!(Suc 0) = (x n)!3
       using a1 by simp
      have drop-2-2: ∀ n. drop 2 (x n)!2 = (x n)!4
       using a1 by simp
      have drop-2-3: ∀ n. drop 2 (x n)!3 = (x n)!5
       using a1 by simp
      have drop-2-4: ∀ n. drop 2 (x n)!4 = (x n)!6
       using a1 by simp
     let ?lhs1 = ((λx na. [if real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (x na!(Suc 0))
0⌉)))
                  < (if hd (x na) = 0
                    then (if na = 0 then 0
                          else min (vT-fd-sol-1
                                     (λn1. real-of-int
                                       (int32 (RoundZero (real-of-int ⌈Rate ∗ max (x n1!(Suc 0)) 0⌉))))
                                     (λn1. if hd (x n1) = 0 then 1 else 0) (na − 1))
                               (real-of-int
                                     (int32 (RoundZero (real-of-int ⌈Rate ∗ max (x (na − 1)!(Suc 0))
0⌉)))))) +
                         1
                    else 0)
                then 1 else 0]) ∘ (λxx nn. take 2 (xx nn))) x n
     let ?rhs1 = (λx na. [if real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (x na!(Suc 0))
0⌉)))
                  < (if hd (x na) = 0
                    then (if na = 0 then 0
                          else min (vT-fd-sol-1
                                     (λn1. real-of-int
                                       (int32 (RoundZero (real-of-int ⌈Rate ∗ max (x n1!(Suc 0)) 0⌉))))
                                     (λn1. if hd (x n1) = 0 then 1 else 0) (na − 1))
                               (real-of-int
                                     (int32 (RoundZero (real-of-int ⌈Rate ∗ max (x (na − 1)!(Suc 0))
0⌉)))))) +
                         1
                    else 0)
                then 1 else 0]) x n
     let ?lhs2 = ((λx na. [latch-rec-calc-output
```

```
                    (λn1. if x n1!(0) = 0 ∨ x n1!(1) = 0 ∨ x n1!(2) = 0 then 0 else 1::real)
                    (λn1. if x n1!(3) = 0 ∧ x n1!(4) = 0 then 0 else 1::real) (na)])
                ∘ (λxx nn. drop 2 (xx nn))) x n
        let ?rhs2 = (λx n. [latch-rec-calc-output
            (λn1. if x n1!(2) = 0 ∨ x n1!(3) = 0 ∨ x n1!(4) = 0 then 0 else 1::real)
            (λn1. if x n1!(5) = 0 ∧ x n1!(6) = 0 then 0 else 1::real) (n)]) x n
        let ?rhs1' = if real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x n!(Suc 0)) 0⌉)))
            < (if hd (x n) = 0
              then (if n = 0 then 0
                    else min (vT-fd-sol-1
                            (λn1. real-of-int
                                (int32 (RoundZero (real-of-int ⌈Rate * max (x n1!(Suc 0)) 0⌉))))
                            (λn1. if hd (x n1) = 0 then 1 else 0) (n − 1))
                        (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x (n − 1)!(Suc 0))
0⌉))))) +
                    1::real
                else 0)
          then 1::real else 0
        let ?rhs2' = latch-rec-calc-output
              (λn1. if x n1!(2) = 0 ∨ x n1!(3) = 0 ∨ x n1!(4) = 0 then 0 else 1::real)
              (λn1. if x n1!(5) = 0 ∧ x n1!(6) = 0 then 0 else 1::real) (n)
        from a1 hd-take-2 have f1: ?lhs1 = ?rhs1
          by (simp)
          have 11: ∀ na. (λn1. if drop 2 (x n1)!(0) = 0 ∨ drop 2 (x n1)!(Suc 0) = 0 ∨ drop 2 (x
n1)!(2) = 0 then 0 else 1) na
            = (λn1. if x n1!(2) = 0 ∨ x n1!(3) = 0 ∨ x n1!(4) = 0 then 0 else 1) na
          using drop-2-0 drop-2-1' drop-2-2 drop-2-3 drop-2-4 a1 by simp
          then have 12: (λn1. if drop 2 (x n1)!(0) = 0 ∨ drop 2 (x n1)!(Suc 0) = 0 ∨ drop 2 (x
n1)!(2) = 0 then 0 else 1)
            = (λn1. if x n1!(2) = 0 ∨ x n1!(3) = 0 ∨ x n1!(4) = 0 then 0 else 1)
          by (rule fun-eq)
        have 21: ∀ na. (λn1. if drop 2 (x n1)!(3) = 0 ∧ drop 2 (x n1)!(4) = 0 then 0 else 1) na
          = (λn1. if x n1!(5) = 0 ∧ x n1!(6) = 0 then 0 else 1) na
          using drop-2-0 drop-2-1' drop-2-2 drop-2-3 drop-2-4 a1 by simp
        then have 22: (λn1. if drop 2 (x n1)!(3) = 0 ∧ drop 2 (x n1)!(4) = 0 then 0 else 1)
          = (λn1. if x n1!(5) = 0 ∧ x n1!(6) = 0 then 0 else 1)
          by (rule fun-eq)
        have latch-eq:
            latch-rec-calc-output (λn1. if drop 2 (x n1)!(0) = 0 ∨ drop 2 (x n1)!(Suc 0) = 0
              ∨ drop 2 (x n1)!(2) = 0 then 0 else 1)
              (λn1. if drop 2 (x n1)!(3) = 0 ∧ drop 2 (x n1)!(4) = 0 then 0 else 1) (n − Suc 0)
          = latch-rec-calc-output (λn1. if x n1!(2) = 0 ∨ x n1!(3) = 0 ∨ x n1!(4) = 0 then 0 else 1)
              (λn1. if x n1!(5) = 0 ∧ x n1!(6) = 0 then 0 else 1) (n − Suc 0)
          by (simp add: 12 22)
        have f2: ?lhs2 = ?rhs2
          apply (simp)
          using latch-eq drop-2-0 drop-2-1 drop-2-2 drop-2-3 drop-2-4 a1
          using numeral-1-eq-Suc-0 numerals(1) by presburger
        have f12: (?lhs1 • ?lhs2) = ?rhs1 • ?rhs2
          using f1 f2 by simp
        then have f21: ... = [?rhs1', ?rhs2']
          by simp
        show (?lhs1 • ?lhs2) = [?rhs1', ?rhs2']
          using f12 f21 by (simp)
      qed
```

```
  qed
 then have f11-2: ... = ?f11
  by (smt Suc-eq-plus1 add-Suc-right numeral-Bit1 numeral-One one-add-one)
 have simblock-f11: SimBlock 7 2 ?f11
  using simblock-f8 simblock-f10 SimBlock-FBlock-parallel-comp
  by (smt Suc-numeral add.commute add-Suc-right add-numeral-left f11-0 f11-1 numeral-Bit1
      numeral-One one-add-one)

 let ?f12-f-1 = λx na. if (if hd(x na) = 0
            then (if na = 0 then 0
                 else min (vT-fd-sol-1
                       (λn1. (λna. real-of-int
                             (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉)))) n1)
                       (λn1. (if hd(x n1) = 0 then 1::real else 0)) (na − 1))
                      ((λna. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0))
0⌉))))
                       (na − 1))) + 1::real
           else 0) > (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x na!(Suc 0)) 0⌉))))
      then 1::real else 0
 let ?f12-f-2 = λx na. latch-rec-calc-output
            (λn1. (if hd(x n1) = 0 ∨ (if (n1 > 0 ∧ (x (n1−1))!2 = 4) then 1::real else 0) = 0
            ∨ (if (x n1)!2 = 8 then 1::real else 0) = 0 then 0 else 1::real))
            (λn1. (if ((if n1 = 0 then 0 else (if (x (n1 − 1))!3 = 0 then 1::real else 0))) = 0 ∧
                  (if n1 = 0 then 0 else (x (n1 − 1))!4) = 0 then 0 else 1::real))
            (na)
 let ?f12-f-2' = λx na. (latch-rec-calc-output
              (λn1. (if hd(x n1) = 0 ∨ n1 = 0 ∨ (x (n1−1))!2 ≠ 4 ∨ (x n1)!2 ≠ 8
                 then 0 else 1::real))
              (λn1. (if ((n1 = 0) ∨ ((x (n1 − 1))!3 ≠ 0 ∧ (x (n1 − 1))!4 = 0))
                 then 0 else 1::real))
              (na))
 let ?f12-f = (λx na. [?f12-f-1 x na, ?f12-f-2 x na])
 let ?f12 = FBlock (λx n. True) 5 2 ?f12-f
 let ?f12-f' = (λx na. [?f12-f-1 x na, ?f12-f-2' x na])
 let ?f12' = FBlock (λx n. True) 5 2 ?f12-f'
 have f12-f-2-eq: ∀x n. ?f12-f-2 x n = ?f12-f-2' x n
  apply (rule allI)+
  apply (simp)
  apply (induct-tac n)
  apply auto[1]
  by simp
 have f12: (
    (
      (
        (
          Split2 (* door-closed (boolean, 1/10s) is split into two *)
          ‖B
          Id (* door-open-time: double *)
        ) ; ; Router 3 [0,2,1]
      )
      ‖B
      post-mode
    )
    ‖B
    (
```

```
        (UnitDelay 1.0 ;; LopNOT)
        ‖B
        (UnitDelay 0) (* Delay2 *)
      )
    ) ;;
    (
      (
        (
          (LopNOT)
          ‖B
          (Id) (* door-open-time: double *)
        ) ;; variableTimer
      )
      ‖B
      (
        (
          (LopAND 3)
          ‖B
          (LopOR 2)
        ) ;; latch
      )
    ) = ?f6 ;; ?f11
    using f11 f11-0 f11-1 f11-2 f8 f8-0 f8-1 f6 f6-0 f6-1 f6-2 by auto
  then have f12-0: ... = FBlock (λx n. True) 5 2 (?f11-f o ?f6-f)
    using simblock-f6 simblock-f11 FBlock-seq-comp by blast
  then have f12-1: ... = FBlock (λx n. True) 5 2 (?f12-f)
    proof −
      have hd-tl-eq: ∀ x n. length(x n) > 1 ⟶ hd (tl (x n)) = (x n)!(Suc 0)
        by (metis One-nat-def drop-0 drop-Suc hd-drop-conv-nth)
      show ?thesis
        apply (rule FBlock-eq'')
        defer
        apply auto[1]
        apply auto[1]
        apply (simp)
        apply (rule allI)+
        apply (clarify)
        apply (rule conjI)
        apply (simp add: hd-tl-eq)
        apply (clarify, rule conjI)
        defer
        apply (simp add: hd-tl-eq)
        proof −
          fix x::nat ⇒ real list and n::nat
          assume a1: ∀ na. length(x na) = 5
         have vT-eq: (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl
(x n1))) 0⌉)))))
                    (λn1. if hd (x n1) = 0 then 1 else 0) (n − Suc 0))
          = (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x n1!(Suc 0))
0⌉)))))
                    (λn1. if hd (x n1) = 0 then 1 else 0) (n − Suc 0))
            by (simp add: hd-tl-eq a1)
          have real-eq: real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (x n))) 0⌉)))
            = real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x n!(Suc 0)) 0⌉)))
            by (simp add: hd-tl-eq a1)
```

```
          show a2: hd (x n) = 0 ⟶
            (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (x n))) 0⌉)))
              < min (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl
(x n1))) 0⌉)))))
                    (λn1. if hd (x n1) = 0 then 1 else 0) (n − Suc 0))
                (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (x (n − Suc 0)))) 0⌉)))))
+
                1 ⟶
              real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x n!(Suc 0)) 0⌉)))
            < min (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x n1!(Suc
0)) 0⌉)))))
                    (λn1. if hd (x n1) = 0 then 1 else 0) (n − Suc 0))
                (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x (n − Suc 0)!(Suc 0)) 0⌉)))))
+
                1) ∧
              (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (x n))) 0⌉)))
                < min (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl
(x n1))) 0⌉)))))
                      (λn1. if hd (x n1) = 0 then 1 else 0) (n − Suc 0))
                  (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (hd (tl (x (n − Suc 0)))))
0⌉)))) +
                1 ⟶
              ¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x n!(Suc 0)) 0⌉)))
                  < min (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x
n1!(Suc 0)) 0⌉)))))
                      (λn1. if hd (x n1) = 0 then 1 else 0) (n − Suc 0))
                  (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (x (n − Suc 0)!(Suc 0))
0⌉)))) +
                1)
              using vT-eq real-eq a1 hd-tl-eq
              by (simp add: hd-tl-eq)
        qed
      qed
    then have f12-2: ... = FBlock (λx n. True) 5 2 (?f12-f')
      proof −
        show ?thesis
          apply (rule FBlock-eq'')
          using f12-f-2-eq apply blast
          apply simp
          by simp
      qed
    have simblock-f12: SimBlock 5 2 ?f12'
      using simblock-f6 simblock-f11 FBlock-seq-comp SimBlock-FBlock-seq-comp f12-0 f12-1 f12-2
      by smt

    let ?f13-f = (λx n. [if ((hd(x n) ≠ 0 ∧ hd(tl(x n)) ≠ 0) ∧
                    (n > 0 ∧ (hd(x (n−1)) = 0 ∨ hd(tl(x (n−1))) = 0))) then 1 else 0])
    let ?f13 = FBlock (λx n. True) 2 1 ?f13-f
    have f13: LopAND 2; ; rise1Shot = LopAND 2 ; ; rise1Shot-simp-pat
      by (simp add: rise1Shot-simp)
    then have f13-0: ... = FBlock (λx n. True) 2 1 (rise1Shot-simp-pat-f o f-LopAND)
      using SimBlock-rise1Shot-simp SimBlock-LopAND FBlock-seq-comp
      by (simp add: LopAND-def)
    then have f13-1: ... = ?f13
      proof −
```

```
      show ?thesis
        apply (rule FBlock-eq'')
        defer
        apply (simp add: f-LopAND-def)
        apply (simp add: f-LopAND-def)
        apply (rule allI)+
        apply (clarify)
        apply (simp add: f-LopAND-def)
        apply (clarify)
        proof −
          fix x:: nat ⇒ real list and n::nat
          assume a1: ∀ n. length(x n) = 2
          assume a2: n > 0
          from a1 a2 have land-1: LAnd (x (n − Suc 0)) =
                (¬ hd (x (n − Suc 0)) = 0 ∧ ¬ hd (tl (x (n − Suc 0)))) = 0)
          using LAnd.simps(1) LAnd.simps(2) append-eq-Cons-conv hd-Cons-tl length-Cons list.sel(3)

                list-equal-size2 tl-append2 by smt
          from a1 a2 have land-2: LAnd (x n) =
                (¬ hd (x n) = 0 ∧ ¬ hd (tl (x n)) = 0)
          using LAnd.simps(1) LAnd.simps(2) append-eq-Cons-conv hd-Cons-tl length-Cons list.sel(3)

                list-equal-size2 tl-append2 by smt
          show (LAnd (x (n − Suc 0)) ⟶
           hd (x n) = 0 ∨ hd (tl (x n)) = 0 ∨ ¬ hd (x (n − Suc 0)) = 0 ∧ ¬ hd (tl (x (n − Suc 0)))
= 0) ∧
           (¬ LAnd (x (n − Suc 0)) ⟶
            (LAnd (x n) ⟶
             ¬ hd (x n) = 0 ∧ ¬ hd (tl (x n)) = 0 ∧ (hd (x (n − Suc 0)) = 0 ∨ hd (tl (x (n − Suc
0))) = 0)) ∧
            (¬ LAnd (x n) ⟶
             hd (x n) = 0 ∨ hd (tl (x n)) = 0 ∨ ¬ hd (x (n − Suc 0)) = 0 ∧ ¬ hd (tl (x (n − Suc
0))) = 0))
            using land-1 land-2 by blast
        qed
    qed
  have simblock-f13: SimBlock 2 1 ?f13
    using SimBlock-rise1Shot-simp SimBlock-LopAND SimBlock-FBlock-seq-comp
    by (metis (no-types, lifting) LopAND-def f13-0 f13-1 pos2)

  let ?f14-f = (λx n. [if ((hd(x n) ≠ 0 ∧ hd(tl(x n)) ≠ 0) ∧
                (n > 0 ∧ (hd(x (n−1)) = 0 ∨ hd(tl(x (n−1))) = 0))) then 1 else 0,
                     if ((hd(x n) ≠ 0 ∧ hd(tl(x n)) ≠ 0) ∧
                (n > 0 ∧ (hd(x (n−1)) = 0 ∨ hd(tl(x (n−1))) = 0))) then 1 else 0])
  let ?f14 = FBlock (λx n. True) 2 2 ?f14-f
  have f14: LopAND 2;; rise1Shot ;; Split2 = ?f13 ;; Split2
    by (metis RA1 f13-0 f13-1 rise1Shot-simp)
  then have f14-0: ... = FBlock (λx n. True) 2 2 (f-Split2 o ?f13-f)
    using simblock-f13 SimBlock-Split2  FBlock-seq-comp
    by (simp add: Split2-def)
  then have f14-1: ... = ?f14
    proof −
      show ?thesis
        apply (rule FBlock-eq)
        using f-Split2-def
```

```
    by fastforce
  qed
have simblock-f14: SimBlock 2 2 ?f14
  using simblock-f13 SimBlock-Split2 SimBlock-FBlock-seq-comp
  by (metis (no-types, lifting) Split2-def f14-0 f14-1)

let ?f15-f = (λx n. [if (((?f12-f-1 x n) ≠ 0 ∧ (?f12-f-2' x n) ≠ 0) ∧
              (n > 0 ∧ ((?f12-f-1 x (n−1)) = 0 ∨ (?f12-f-2' x (n−1)) = 0))) then 1 else 0,
                   if (((?f12-f-1 x n) ≠ 0 ∧ (?f12-f-2' x n) ≠ 0) ∧
              (n > 0 ∧ ((?f12-f-1 x (n−1)) = 0 ∨ (?f12-f-2' x (n−1)) = 0))) then 1 else 0])
let ?f15 = FBlock (λx n. True) 5 2 ?f15-f
have f15: (
   (
     (
       (
         (
           Split2 (* door-closed (boolean, 1/10s) is split into two *)
           ‖B
           Id (* door-open-time: double *)
         ) ;; Router 3 [0,2,1]
       )
       ‖B
       post-mode
     )
     ‖B
     (
       (UnitDelay 1.0 ;; LopNOT)
       ‖B
       (UnitDelay 0) (* Delay2 *)
     )
   ) ;;
   (
     (
       (
         (LopNOT)
         ‖B
         (Id) (* door-open-time: double *)
       ) ;; variableTimer
     )
     ‖B
     (
       (
         (LopAND 3)
         ‖B
         (LopOR 2)
       ) ;; latch
     )
   ) ;; LopAND 2;; rise1Shot ;; Split2) = ?f12' ;; ?f14
  by (smt RA1 f12 f12-0 f12-1 f12-2 f14 f14-0 f14-1)
then have f15-0: ... = FBlock (λx n. True) 5 2 (?f14-f o ?f12-f')
  using simblock-f14 simblock-f12 FBlock-seq-comp by blast
then have f15-1: ... = ?f15
  proof −
    have 1: ∀ x n. ((?f14-f o ?f12-f') x n = ?f15-f x n)
      apply (rule allI)+
```

```
      by (simp)
    have 2: (?f14-f o ?f12-f') = ?f15-f
      using 1 fun-eq by blast
    show ?thesis
      apply (rule FBlock-eq)
      using 1 2 by blast
  qed
  have simblock-f15: SimBlock 5 2 ?f15
    using simblock-f14 simblock-f12 SimBlock-FBlock-seq-comp f15-0 f15-1
    by (metis (no-types, lifting))
  have inps-f15: inps ?f15 = 5
    using simblock-f15 inps-P by blast
  have outps-f15: outps ?f15 = 2
    using simblock-f15 outps-P by blast

  have f16: post-landing-finalize-1 = ?f15 f_D (4, 1)
    using f15 f15-0 f15-1 post-landing-finalize-1-def by presburger
  show ?thesis
    apply (simp only: plf-rise1shot-simp-def)
    using f16 simblock-f15 by presburger
qed
```

Finally, *post-landing-finalize-1* is simplified to a design with a feedback.

```
lemma post-landing-finalize-1-simp:
  post-landing-finalize-1 = plf-rise1shot-simp f_D (4, 1)
  using post-landing-finalize-1-simp-simblock by blast

lemma post-landing-finalize-1-simblock:
  SimBlock 5 2 plf-rise1shot-simp
  using post-landing-finalize-1-simp-simblock by blast

lemma inps-plf-rise1shot:
  inps plf-rise1shot-simp = 5
  using post-landing-finalize-1-simblock inps-P by blast

lemma outps-plf-rise1shot:
  outps plf-rise1shot-simp = 2
  using post-landing-finalize-1-simblock outps-P by blast
```

C.5 Verification

Here we assume the maximum door open time is 1000s. It could be a value less than 214748364.

```
abbreviation max-door-open-time ≡ 1000
```

C.5.1 Requirement 01

post-landing-finalize-req-01: A finalize event will be broadcast after the aircraft door has been open continuously for *door-open-time* seconds while the aircraft is on the ground after a successful landing.

Here we assume the constant door open time is 20s. It should be a variable but according to Assumption 3, it does not change while the aircraft is on the ground. So we can regard it as a constant after landing.

```
abbreviation c-door-open-time ≡ 20
```

req-01-contract is the requirement to be verified. Its precondition specifies that *door-closed* and *ac-on-ground* are boolean and *door-open-time* is constant. Its postcondition specifies that

- it always has four inputs and one output;
- the requirement:
  - after a successful landing: door is closed, aircraft is on ground, mode is switched from LANDING (at step m) to GROUND (at step $m+1$);
  - then the door has been open continuously for *door-open-time* (200): from step $m{+}2{+}p$ to $m+2+p+door\_open\_time$ $(m+2+p+200)$, therefore the door is closed at the step before p;
  - while the aircraft is on ground: *ac-on-ground* is true and *mode=GROUND*;
  - additionally, between step m and p, the *finalize-event* is not enabled;
  - then a *finalize-event* will be broadcast at step $p + door\_open\_time$

definition *req-01-contract* $\equiv$ $((\forall\ n{::}nat \cdot ($
$\quad «(\lambda x\ n.$
$\quad\quad ($
$\quad\quad\quad (hd(x\ n) = 0 \vee hd(x\ n) = 1) \wedge (*\ door\text{-}closed\ is\ boolean\ *)$
$\quad\quad\quad ((x\ n)!1 = c\text{-}door\text{-}open\text{-}time) \wedge (*\ door\text{-}open\text{-}time\ *)$
$\quad\quad\quad ((x\ n)!3 = 0 \vee (x\ n)!3 = 1)\ (*\ ac\text{-}on\text{-}ground\ is\ boolean\ *)$
$\quad\quad))» (\&inouts)_a\ («n»)_a)::sim\text{-}state\ upred)$
$\vdash_n$
$((\forall\ n{::}nat \cdot$
$\quad ((\#_u(\$inouts\ («n»)_a)) =_u «4») \wedge$
$\quad ((\#_u(\$inouts'\ («n»)_a)) =_u «1»)) \wedge$
$\quad (*\ m \quad : LANDING$
$\quad\quad m{+}1\ : GROUND$
$\quad\quad ...\ : \neg finalize\text{-}event\ during\ this\ time,\ door\ may\ be\ open\ for\ a\ while\ but\ not\ longer\ like$
$\quad\quad\quad door\text{-}open\text{-}time$
$\quad\quad p{-}1\ : door\ closed$
$\quad\quad p[0] : door\ open$
$\quad\quad ...\ : door\ continuously\ open$
$\quad\quad p[n] : door\ open\ for\ door\text{-}open\text{-}time\ seconds,\ finalize\text{-}event\ enabled.$
$\quad *)$
$\quad (\forall\ m{::}nat \cdot$
$\quad\quad ($
$\quad\quad ((*\ A\ successful\ landing\ *)$
$\quad\quad\quad ((«nth» (\$inouts\ («m»)_a)_a\ (3)_a =_u 1)\ (*\ ac\text{-}on\text{-}ground = true*)$
$\quad\quad\quad\ \wedge(«nth» (\$inouts\ («m»)_a)_a\ (2)_a =_u 4)\ (*\ mode = LANDING\ *)$
$\quad\quad\quad\ \wedge(«nth» (\$inouts\ («m»)_a)_a\ (0)_a =_u 1)\ (*\ door\text{-}closed = true\ *)$
$\quad\quad\quad) \wedge$
$\quad\quad\quad ((«nth» (\$inouts\ («m{+}1»)_a)_a\ (3)_a =_u 1)\ (*\ ac\text{-}on\text{-}ground = true*)$
$\quad\quad\quad\ \wedge(«nth» (\$inouts\ («m{+}1»)_a)_a\ (2)_a =_u 8)\ (*\ mode = GROUND\ *)$
$\quad\quad\quad\ \wedge(«nth» (\$inouts\ («m{+}1»)_a)_a\ (0)_a =_u 1)\ (*\ door\text{-}closed = true\ *)$
$\quad\quad\quad)$
$\quad\quad) \Rightarrow$
$\quad\quad ((*\ The\ door\ is\ open\ continuously\ for\ door\text{-}open\text{-}time\ seconds\ from\ (m{+}p)\ *)$
$\quad\quad\quad \forall\ p{::}nat \cdot$
$\quad\quad\quad\quad ($
$\quad\quad\quad\quad\quad ((\forall\ q{::}nat \cdot$
$\quad\quad\quad\quad\quad\quad (((«q» \leq_u «c\text{-}door\text{-}open\text{-}time{*}Rate»)) \Rightarrow$

```
                («nth» ($inouts («m+2+p+q»)_a)_a (0)_a =_u 0) (* door-closed = false *)
            ) (* The door is continuously open *)
        ) ∧
        (∀ q::nat · ((«q» ≤_u «p + c-door-open-time*Rate») ⇒
            ((«nth» ($inouts («m+2+q»)_a)_a (3)_a =_u 1) (* ac-on-ground = true *) ∧
             («nth» ($inouts («m+2+q»)_a)_a (2)_a =_u 8) (* mode = GROUND *)))
        ) (* the aircraft is always on the ground from m+2 to m+p+times *) ∧
        ((«nth» ($inouts («m+2+p−1»)_a)_a (0)_a =_u 1)) (* door-closed = true before $p$ *) ∧
        (∀ q::nat · («q» <_u «p») ⇒ (head_u(($inouts´ («m+2+q»)_a)) =_u 0)))
          (* finalize-event has not been enabled before p *)
        ⇒ ($inouts´ («m + 2 + p + c-door-open-time*Rate»)_a) =_u ⟨1⟩(* then the finalize-event
is true. *)
      )
    )
  ))))
```

req-01-1-contract is the contract for *post-landing-finalize-1* without feedback: *plf-rise1shot-simp*. It is similar to *req-01-contract* except that 1) it has five inputs and two outputs (the feedback operator will remove one input and one output); 2) the 2nd output is equal to the 4th input since they are connected together by the feedback loop.

definition *req-01-1-contract* ≡

```
((∀ n::nat · (
  «(λx n.
    (
      (hd(x n) = 0 ∨ hd(x n) = 1) ∧ (* door-closed is boolean *)
      ((x n)!1 = c-door-open-time) ∧ (* door-open-time *)
      ((x n)!3 = 0 ∨ (x n)!3 = 1) (* ac-on-ground is boolean *)
    ))» (&inouts)_a («n»)_a)::sim-state upred)
⊢_n
((∀ n::nat ·
  ((#_u($inouts («n»)_a)) =_u «5») ∧
  ((#_u($inouts´ («n»)_a)) =_u «2»)) ∧
  (* m    : LANDING
     m+1  : GROUND
     ...  : ¬finalize-event during this time, door may be open for a while but not longer like
            door-open-time
     p−1  : door closed
     p[0] : door open
     ...  : door continuously open
     p[n] : door open for door-open-time seconds, finalize-event enabled.
  *)
  (∀ m::nat ·
    (
      ( (* A successful landing *)
        ( («nth» ($inouts («m»)_a)_a (3)_a =_u 1) (* ac-on-ground = true*)
         ∧(«nth» ($inouts («m»)_a)_a (2)_a =_u 4) (* mode = LANDING *)
         ∧(«nth» ($inouts («m»)_a)_a (0)_a =_u 1) (* door-closed = true *)
        ) ∧
        ( («nth» ($inouts («m+1»)_a)_a (3)_a =_u 1) (* ac-on-ground = true*)
         ∧(«nth» ($inouts («m+1»)_a)_a (2)_a =_u 8) (* mode = GROUND *)
         ∧(«nth» ($inouts («m+1»)_a)_a (0)_a =_u 1) (* door-closed = true *)
        ) ∧
        (∀ n::nat · (head_u(tail_u($inouts´ («n»)_a)) =_u «nth» ($inouts («n»)_a)_a (4)_a))
        (* 4th input is equal to output*)
      ) ⇒
      ( (* The door is open continuously for door-open-time seconds from (m+p) *)
```

```
          ∀ p::nat ·
            (
              ((∀ q::nat ·
                ( ((«q» ≤u «c-door-open-time∗Rate»)) ⇒
                    («nth» ($inouts («m+2+p+q»)a)a (0)a =u 0) (∗ door-closed = false ∗)
                ) (∗ The door is continuously open ∗)
              ) ∧
              (∀ q::nat · ((«q» ≤u «p + c-door-open-time∗Rate») ⇒
                    ((«nth» ($inouts («m+2+q»)a)a (3)a =u 1) (∗ ac-on-ground = true ∗) ∧
                     («nth» ($inouts («m+2+q»)a)a (2)a =u 8) (∗ mode = GROUND ∗)))
              ) (∗ the aircraft is always on the ground from m+2 to m+p+times ∗) ∧
              ((«nth» ($inouts («m+2+p−1»)a)a (0)a =u 1)) (∗ door-closed = true ∗) ∧
              (∀ q::nat · («q» <u «p») ⇒ (headu(($inouts´ («m+2+q»)a)) =u 0)))
                (∗ finalize-event has not been enabled before p ∗)
              ⇒ ($inouts´ («m + 2 + p + c-door-open-time∗Rate»)a) =u ⟨1,1⟩(∗ then the finalize-event
is true. ∗)
            )
        )
      ))))
```

lemma *SimBlock-req-01-1-contract*:
SimBlock 5 2 req-01-1-contract
apply (*simp add*: *SimBlock-def req-01-1-contract-def*)
apply (*rel-auto*)
apply (*rule-tac x* = λ*na*. [*1*, *20*, *if na* = *1 then 8 else 4*, *1*, *0*] **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*rule-tac x* = λ*na*. [*1*, *1*] **in** *exI*)
by (*simp*)

lemma *inps-req-01-1-contract*:
inps req-01-1-contract = *5*
using *SimBlock-req-01-1-contract inps-P* **by** *blast*

lemma *outps-req-01-1-contract*:
outps req-01-1-contract = *2*
using *SimBlock-req-01-1-contract outps-P* **by** *blast*

In order to verify this requirement, firstly to verify the contract *req-01-1-contract* refined by *plf-rise1shot-simp*.

lemma *req-01-ref-plf-rise1shot*: *req-01-1-contract* ⊑ *plf-rise1shot-simp*
apply (*simp add*: *FBlock-def plf-rise1shot-simp-def req-01-1-contract-def*)
apply (*rule ndesign-refine-intro*)
apply *simp*
apply (*unfold upred-defs urel-defs*)
apply (*simp add*: *fun-eq-iff relcomp-unfold OO-def*
lens-defs upred-defs alpha-splits Product-Type.split-beta)*?*
apply (*transfer*)
apply (*simp*; *safe*)
proof −
fix $inouts_v$ $inouts_v'$::*nat* ⇒ *real list* **and** *x*::*nat* **and** *xa*::*nat*
assume *a1*: ∀ *x*. (*hd* ($inouts_v$ *x*) = *0* ∨ *hd* ($inouts_v$ *x*) = *1*) ∧
inouts$_v$ *x*!(*Suc 0*) = *c-door-open-time* ∧ ($inouts_v$ *x*!*3* = *0* ∨ $inouts_v$ *x*!*3* = *1*)
let *?P* = λ*x*. (*x* ≤ *Suc 0* ⟶
(*hd* ($inouts_v$ *0*) = *0* ⟶
(*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* ($inouts_v$ *0*!(*Suc 0*)) *0*⌉)) < *1* ⟶

$$
\begin{array}{l}
(x = 0 \longrightarrow length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
(0 < x \longrightarrow \\
\ (hd\ (inouts_v\ x) = 0 \longrightarrow \\
\ \ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\ \ < min\ 1\ (real\text{-}of\text{-}int \\
\qquad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + \\
\ \ \ 1 \longrightarrow \\
\ \ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\ then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad\ then\ 0\ else\ 1) \\
\qquad x = \\
\qquad 0 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\ \ (latch\text{-}rec\text{-}calc\text{-}output \\
\ \ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\ \ \ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\ \ \ x = \\
\ \ \ 0 \longrightarrow \\
\ \ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\ (\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\ \ \ < min\ 1\ (real\text{-}of\text{-}int \\
\qquad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + \\
\ \ \ \ 1 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge \\
\ \ length(inouts_v'\ x) = 2 \wedge \\
\ \ [0,\ 0] = inouts_v'\ x \wedge \\
\ \ (latch\text{-}rec\text{-}calc\text{-}output \\
\ \ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\ \ \ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\ \ \ x = \\
\ \ \ 0 \longrightarrow \\
\ \ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\ \ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\ then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad\ then\ 0\ else\ 1) \\
\qquad x = \\
\qquad 0 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\ \ (latch\text{-}rec\text{-}calc\text{-}output \\
\ \ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8
\end{array}
$$

$$
\begin{array}{l}
\quad \textit{then } 0 \textit{ else } 1) \\
\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad \textit{else } 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x)) \wedge \\
(\neg\ \textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil)) < 0 \longrightarrow \\
\textit{length}(\textit{inouts}_v\ x) = 5 \wedge \\
\textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge \\
[0,\ 0] = \textit{inouts}_v{}'\ x \wedge \\
(\textit{latch-rec-calc-output} \\
\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad \textit{then } 0 \textit{ else } 1) \\
\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad \textit{else } 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x))))) \wedge \\
(\neg\ \textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ 0!(\textit{Suc } 0))\ 0\rceil)) < 1 \longrightarrow \\
(x = 0 \longrightarrow \\
\textit{length}(\textit{inouts}_v\ 0) = 5 \wedge \\
\textit{length}(\textit{inouts}_v{}'\ 0) = 2 \wedge \\
[0,\ 0] = \textit{inouts}_v{}'\ 0 \wedge \textit{length}(\textit{inouts}_v\ 0) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ 0) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}' \\
0) \wedge \\
(0 < x \longrightarrow \\
(\textit{hd}\ (\textit{inouts}_v\ x) = 0 \longrightarrow \\
(\textit{real-of-int}\ (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil))) \\
< \textit{min } 1\ (\textit{real-of-int} \\
\quad\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ 0!(\textit{Suc } 0))\ 0\rceil)))) + \\
1 \longrightarrow \\
(\neg\ \textit{latch-rec-calc-output} \\
\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad \textit{then } 0 \textit{ else } 1) \\
\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \\
\quad \textit{then } 0 \textit{ else } 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \textit{inouts}_v{}'\ x) \wedge \\
(\textit{latch-rec-calc-output} \\
\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad \textit{then } 0 \textit{ else } 1) \\
\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad \textit{else } 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x)) \wedge \\
(\neg\ \textit{real-of-int}\ (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil))) \\
\quad < \textit{min } 1\ (\textit{real-of-int} \\
\quad\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ 0!(\textit{Suc } 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
\textit{length}(\textit{inouts}_v\ x) = 5 \wedge \\
\textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge
\end{array}
$$

$$
\begin{array}{l}
[0,\ 0] = inouts_v'\ x\ \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))))) \wedge \\
(\neg\ hd\ (inouts_v\ 0) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(x = 0 \longrightarrow length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
(0 < x \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
< min\ 0\ (real\text{-}of\text{-}int \\
\qquad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))) + \\
1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8
\end{array}
$$

```
        then 0 else 1)
     (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
        then 0 else 1)
     x =
    0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
 (latch-rec-calc-output
   (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
       then 0 else 1)
  (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
       else 1)
   x =
  0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)))
   < min 0 (real-of-int
         (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v 0!(Suc 0)) 0⌉))))) +
    1 ⟶
 length(inouts_v x) = 5 ∧
 length(inouts_v' x) = 2 ∧
 [0, 0] = inouts_v' x ∧
 (latch-rec-calc-output
   (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
       then 0 else 1)
  (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
       else 1)
   x =
  0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
(¬ hd (inouts_v x) = 0 ⟶
 (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
  (¬ latch-rec-calc-output
     (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
         then 0 else 1)
     (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
         then 0 else 1)
     x =
    0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
 (latch-rec-calc-output
   (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
       then 0 else 1)
  (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
       else 1)
   x =
  0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
(¬ int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
 length(inouts_v x) = 5 ∧
 length(inouts_v' x) = 2 ∧
 [0, 0] = inouts_v' x ∧
```

$$
\begin{array}{l}
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(x = 0 \longrightarrow \\
length(inouts_v\ 0) = 5 \wedge \\
length(inouts_v'\ 0) = 2 \wedge \\
[0,\ 0] = inouts_v'\ 0 \wedge length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v' \\
0) \wedge \\
(0 < x \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
< min\ 0\ (real\text{-}of\text{-}int \\
\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))\ + \\
1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ 0\ (real\text{-}of\text{-}int \\
\qquad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))\ + \\
\quad 1 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge
\end{array}
$$

```
(¬ hd (inouts_v x) = 0 ⟶
 (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
  (¬ latch-rec-calc-output
       (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
               hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
             then 0 else 1)
       (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
             then 0 else 1)
       x =
      0 ⟶
   length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
  (latch-rec-calc-output
    (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
     x =
    0 ⟶
    length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
 (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
  length(inouts_v x) = 5 ∧
  length(inouts_v' x) = 2 ∧
  [0, 0] = inouts_v' x ∧
  (latch-rec-calc-output
    (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
     x =
    0 ⟶
    length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))))))) ∧
(¬ x ≤ Suc 0 ⟶
 (hd (inouts_v (x − Suc 0)) = 0 ⟶
  (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))
   < min (vT-fd-sol-1
           (λn1. real-of-int
                   (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
           (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc (Suc 0)))
     (real-of-int
      (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc (Suc 0))!(Suc 0)) 0⌉))))
+
     1 ⟶
    (hd (inouts_v x) = 0 ⟶
     (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
      < min (vT-fd-sol-1
              (λn1. real-of-int
                      (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
              (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
       (real-of-int
        (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
       1 ⟶
      (¬ latch-rec-calc-output
           (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
```

$$
\begin{array}{l}
\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad\quad then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \wedge \\
latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\quad else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad\quad then\ 0\ else\ 1) \\
\quad\quad (x - Suc\ 0) = \\
\quad\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\quad\quad (\lambda n1.\ real\text{-}of\text{-}int \\
\quad\quad\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\quad\quad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\quad\quad (real\text{-}of\text{-}int \\
\quad\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\quad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow
\end{array}
$$

$$
\begin{array}{l}
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (x - Suc\ 0) = \\
\quad\ 0 \longrightarrow \\
\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ x = \\
\quad\ 0 \wedge \\
\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\quad\ \ else\ 1) \\
\quad\ (x - Suc\ 0) = \\
\ 0 \longrightarrow \\
\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\ (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\quad\ \ else\ 1) \\
\quad\ x = \\
\ 0 \longrightarrow \\
\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (x - Suc\ 0) = \\
\quad\ 0 \longrightarrow \\
\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\ length(inouts_v\ x) = 5 \wedge \\
\ length(inouts_v'\ x) = 2 \wedge \\
\ [0,\ 0] = inouts_v'\ x \wedge \\
\ (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\quad\quad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad\ \ then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\quad\ \ else\ 1) \\
\quad\ x =
\end{array}
$$

```
  0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x) ∧
 (¬ latch-rec-calc-output
     (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
           hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
         then 0 else 1)
     (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
         then 0 else 1)
     (x − Suc 0) =
     0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)))) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc 0)!(Suc 0))
0⌉)))
  < min (vT-fd-sol-1
       (λn1. real-of-int
           (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v n1!(Suc 0)) 0⌉))))
       (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc (Suc 0)))
    (real-of-int
     (int32 (RoundZero
           (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc (Suc 0))!(Suc 0)) 0⌉)))) +
   1 ⟶
 (hd (inouts_v x) = 0 ⟶
 (real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)))
  < min (vT-fd-sol-1
       (λn1. real-of-int
           (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v n1!(Suc 0)) 0⌉))))
       (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
    (real-of-int
     (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
   1 ⟶
 (¬ latch-rec-calc-output
     (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
           hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
         then 0 else 1)
     (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
         then 0 else 1)
     x =
     0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
 (latch-rec-calc-output
   (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
           hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
         then 0 else 1)
   (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
         else 1)
    x =
   0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)))
    < min (vT-fd-sol-1
         (λn1. real-of-int
             (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v n1!(Suc 0)) 0⌉))))
         (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
      (real-of-int
       (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
```

```
      1 ⟶
    length(inouts_v x) = 5 ∧
    length(inouts_v' x) = 2 ∧
    [0, 0] = inouts_v' x ∧
    (latch-rec-calc-output
      (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
      x =
      0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
  (¬ hd (inouts_v x) = 0 ⟶
   (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
    (¬ latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
            then 0 else 1)
        (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
            then 0 else 1)
        x =
        0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
     (latch-rec-calc-output
       (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
             hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
           then 0 else 1)
       (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
           else 1)
       x =
       0 ⟶
       length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
     (¬ int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
      length(inouts_v x) = 5 ∧
      length(inouts_v' x) = 2 ∧
      [0, 0] = inouts_v' x ∧
      (latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
            then 0 else 1)
        (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
            else 1)
        x =
        0 ⟶
        length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))))) ∧
(¬ hd (inouts_v (x − Suc 0)) = 0 ⟶
 (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)) < 0 ⟶
  (hd (inouts_v x) = 0 ⟶
   (real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)))
    < min (vT-fd-sol-1
            (λn1. real-of-int
                  (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v n1!(Suc 0)) 0⌉))))
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
      (real-of-int
```

```
    (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
  1 ⟶
(¬ latch-rec-calc-output
    (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
        then 0 else 1)
    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
        then 0 else 1)
    x =
   0 ∧
 latch-rec-calc-output
  (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
      then 0 else 1)
 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
      else 1)
  (x − Suc 0) =
 0 ⟶
 length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
(latch-rec-calc-output
  (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
      then 0 else 1)
 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
      else 1)
  x =
 0 ⟶
 length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x) ∧
(¬ latch-rec-calc-output
    (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
        then 0 else 1)
    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
        then 0 else 1)
    (x − Suc 0) =
   0 ⟶
 length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
   < min (vT-fd-sol-1
          (λn1. real-of-int
                (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
          (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
     (real-of-int
      (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
    1 ⟶
length(inouts_v x) = 5 ∧
length(inouts_v' x) = 2 ∧
[0, 0] = inouts_v' x ∧
(latch-rec-calc-output
  (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
      then 0 else 1)
 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
      else 1)
  x =
```

$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge$
$(\neg$ *latch-rec-calc-output*
$(\lambda n1.$ *if* $inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
hd $(inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
then 0 else 1$)$
$(\lambda n1.$ *if* $n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
then 0 else 1$)$
$(x - Suc\ 0) =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge$
$(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow$
$(\neg$ *latch-rec-calc-output*
$(\lambda n1.$ *if* $inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
hd $(inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
then 0 else 1$)$
$(\lambda n1.$ *if* $n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
then 0 else 1$)$
$x =$
$0 \wedge$
latch-rec-calc-output
$(\lambda n1.$ *if* $inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
hd $(inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
then 0 else 1$)$
$(\lambda n1.$ *if* $n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$ *then 0*
else 1$)$
$(x - Suc\ 0) =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.$ *if* $inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
hd $(inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
then 0 else 1$)$
$(\lambda n1.$ *if* $n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$ *then 0*
else 1$)$
$x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge$
$(\neg$ *latch-rec-calc-output*
$(\lambda n1.$ *if* $inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
hd $(inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
then 0 else 1$)$
$(\lambda n1.$ *if* $n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
then 0 else 1$)$
$(x - Suc\ 0) =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge$
$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 2 \wedge$
$[0,\ 0] = inouts_v'\ x \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.$ *if* $inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
hd $(inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$

$$
\begin{array}{l}
\quad \textit{then } 0 \textit{ else } 1) \\
\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad \textit{else } 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v'\ x) \wedge \\
\quad (\neg\ \textit{latch-rec-calc-output} \\
\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (x - \textit{Suc } 0) = \\
\quad\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v'\ x)))) \wedge \\
(\neg\ \textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ (x - \textit{Suc } 0)!(\textit{Suc } 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad (\textit{hd}\ (\textit{inouts}_v\ x) = 0 \longrightarrow \\
\quad (\textit{real-of-int}\ (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil))) \\
\quad < \textit{min}\ (\textit{vT-fd-sol-1} \\
\quad\quad (\lambda n1.\ \textit{real-of-int} \\
\quad\quad\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ n1!(\textit{Suc } 0))\ 0\rceil)))) \\
\quad\quad (\lambda n1.\ \textit{if hd}\ (\textit{inouts}_v\ n1) = 0 \textit{ then } 1 \textit{ else } 0)\ (x - \textit{Suc } 0)) \\
\quad\quad (\textit{real-of-int} \\
\quad\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ (x - \textit{Suc } 0)!(\textit{Suc } 0))\ 0\rceil)))) + \\
\quad\quad 1 \longrightarrow \\
\quad (\neg\ \textit{latch-rec-calc-output} \\
\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad x = \\
\quad\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v'\ x) = 2 \wedge [1,\ 1] = \textit{inouts}_v'\ x) \wedge \\
\quad (\textit{latch-rec-calc-output} \\
\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad\quad \textit{else } 1) \\
\quad\quad x = \\
\quad\quad 0 \longrightarrow \\
\quad\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v'\ x)) \wedge \\
\quad (\neg\ \textit{real-of-int}\ (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil))) \\
\quad\quad < \textit{min}\ (\textit{vT-fd-sol-1} \\
\quad\quad\quad (\lambda n1.\ \textit{real-of-int} \\
\quad\quad\quad\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ n1!(\textit{Suc } 0))\ 0\rceil)))) \\
\quad\quad\quad (\lambda n1.\ \textit{if hd}\ (\textit{inouts}_v\ n1) = 0 \textit{ then } 1 \textit{ else } 0)\ (x - \textit{Suc } 0)) \\
\quad\quad\quad (\textit{real-of-int} \\
\quad\quad\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ (x - \textit{Suc } 0)!(\textit{Suc } 0))\ 0\rceil)))) + \\
\quad\quad\quad 1 \longrightarrow \\
\quad\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \\
\quad\quad \textit{length}(\textit{inouts}_v'\ x) = 2 \wedge \\
\quad\quad [0,\ 0] = \textit{inouts}_v'\ x \wedge \\
\quad\quad (\textit{latch-rec-calc-output}
\end{array}
$$

$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow$
$\mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0$
$\mathit{else}\ 1)$
$x =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))) \wedge$
$(\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow$
$\mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0$
$\mathit{then}\ 0\ \mathit{else}\ 1)$
$x =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge$
$(\mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow$
$\mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0$
$\mathit{else}\ 1)$
$x =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge$
$(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge$
$\mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge$
$[0,\ 0] = \mathit{inouts}_v{}'\ x \wedge$
$(\mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow$
$\mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0$
$\mathit{else}\ 1)$
$x =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))))))$

assume *a2*: $\forall x.\ ?P\ x$

assume *a3*: $\mathit{inouts}_v\ x!3 = 1$
assume *a4*: $\mathit{inouts}_v\ x!2 = 4$
assume *a5*: $\mathit{inouts}_v\ x!0 = 1$
assume *a6*: $\mathit{inouts}_v\ (\mathit{Suc}\ x)!3 = 1$
assume *a7*: $\mathit{inouts}_v\ (\mathit{Suc}\ x)!2 = 8$
assume *a8*: $\mathit{inouts}_v\ (\mathit{Suc}\ x)!0 = 1$
assume *a81*: $\forall x.\ \mathit{hd}\ (\mathit{tl}\ (\mathit{inouts}_v{}'\ x)) = \mathit{inouts}_v\ x!(4)$
assume *a9*: $\forall xb{\leq}200.\ \mathit{inouts}_v\ (\mathit{Suc}\ (\mathit{Suc}\ (x + xa + xb)))!0 = 0$
assume *a10*: $\forall xb{\leq}xa + 200.\ \mathit{inouts}_v\ (\mathit{Suc}\ (\mathit{Suc}\ (x + xb)))!(3) = 1 \wedge \mathit{inouts}_v\ (\mathit{Suc}\ (\mathit{Suc}\ (x + xb)))!(2) = 8$
assume *a11*: $\mathit{inouts}_v\ (\mathit{Suc}\ (x + xa))!0 = 1$

```
    assume a12: ∀ xb<xa. hd (inouts_v' (Suc (Suc (x + xb)))) = 0
    have len-inouts: ∀ x. length(inouts_v x) = 5
      using a2 by blast

    have a11': hd(inouts_v (Suc (x + xa))) = 1
      using a11 len-inouts
      by (metis hd-conv-nth list.size(3) zero-neq-numeral)

    from a1 have a1': ∀ x. inouts_v x!(Suc 0) = c-door-open-time
      by simp
    have 1: ∀ x::nat. (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) = 200)
      using a1' by (simp add: RoundZero-def int32-def)
   have 11: ∀ x::nat. (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
= 200)
      using a1' by (simp add: RoundZero-def int32-def)

    have 12: (vT-fd-sol-1
            (λn1. real-of-int
                  (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa)))) = 1
      proof −
        have 1: (vT-fd-sol-1
            (λn1. real-of-int
                  (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa)))) =
            (vT-fd-sol-1
            (λn1. 200)
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa))))
          using 11 by simp
        then have 2: ... = 1
          apply (simp)
              using a9 a11 by (smt Nat.add-0-right a1 a2 hd-conv-nth le0 list.size(3) zero-less-Suc
zero-neq-numeral)
        show ?thesis
          using 1 2 by (simp)
      qed

    have 13: ∀ q<200 . (vT-fd-sol-1
            (λn1. real-of-int
                  (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa + q)))) = q + 1
      apply (rule allI)
      proof −
        fix q::nat
        have 1: q < 200 ⟶
          (vT-fd-sol-1
          (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
          (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa + q))))
           = real (q + 1)
          proof (induct q)
            case 0
            then show ?case using 12 by simp
          next
            case (Suc q)
            then show ?case
```

```
            apply (clarify)
            apply (simp)
            apply (rule conjI)
            apply (clarify)
            using 11 apply auto[1]
            proof −
              assume a1: q < 199
              have a1': Suc q < 200
                using a1 by simp
             have 1: hd (inouts_v (Suc (Suc (Suc (x + xa + q))))) = (inouts_v (Suc (Suc (Suc (x + xa
+ q)))))!0
                using len-inouts
                by (metis Suc-numeral Zero-not-Suc hd-conv-nth list.size(3) semiring-norm(5))
              then have 2: ... = (inouts_v (Suc (Suc (x + xa + Suc q))))!0
                by (smt add-Suc-right)
              then have 3: ... = 0
              proof −
                show ?thesis
                  using a1' a9 le-eq-less-or-eq by presburger
              qed
              show hd (inouts_v (Suc (Suc (Suc (x + xa + q))))) = 0
                using 1 2 3 by linarith
            qed
          qed
        show q < 200 ⟶ vT-fd-sol-1
          (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
          (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa + q))) = real (q + 1)
          using 1 by linarith
      qed
    have 130: ∀ q<200 . (vT-fd-sol-1 (λn1. 200)
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (Suc (x + xa + q)))) = q + 1
      using 13 by (simp add: 11)

    have 14: (vT-fd-sol-1 (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc
0)) 0⌉)))))
              (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (x + xa))) = 0
      using a11 a11' 1 11 by (simp)


    have output-at-x: hd (inouts_v' x) = 0
      using a5 a2
      by (smt 1 hd-Cons-tl hd-conv-nth list.inject list.size(3) neq0-conv zero-neq-numeral)
    have output-at-x-1: hd (inouts_v' (Suc x)) = 0
      using a8 a2
      by (smt 1 hd-Cons-tl hd-conv-nth list.inject list.size(3) neq0-conv zero-neq-numeral)


    have output-at-q: ∀ q<200 . hd (inouts_v' (Suc (Suc (x + xa + q)))) = 0
      apply (rule allI)
      proof −
        fix q::nat
        have count-less: ∀ q<200.
              (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v  (Suc (Suc (x + xa +
q)))!(Suc 0)) 0⌉)))
               < min (vT-fd-sol-1
```

```
                    (λn1. real-of-int
                          (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
                    (λn1. if hd (inouts_v n1) = 0 then 1 else 0)  (Suc (x + xa + q)))
                (real-of-int
                   (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (Suc (x + xa + q))!(Suc 0))
0⌉)))) +
               1)
        apply (rule allI)
        proof −
          fix q::nat
          show 1: q < 200 ⟶
            ¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (Suc (Suc (x + xa +
q)))!(Suc 0)) 0⌉)))
             < min (vT-fd-sol-1
                    (λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0))
0⌉))))
                    (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (Suc (x + xa + q)))
                (real-of-int
                   (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (Suc (x + xa + q))!(Suc 0))
0⌉)))) +
               1
            proof (induct q)
              case 0
              then show ?case
                using 1 11 14 a11 by simp
            next
              case (Suc q)
              then show ?case
                using 1 11 14 a11 13 by simp
            qed
        qed
      show q < 200 ⟶ hd (inouts_v' (Suc (Suc (x + xa + q)))) = 0
        proof (induct q)
          case 0
          then show ?case
            using a11 1 11 a2 13 count-less
            by (smt 14 Nat.add-0-right One-nat-def diff-Suc-1 list.sel(1) zero-less-Suc)
        next
          case (Suc q)
          then show ?case
            using count-less 1 11 a2
            by (smt One-nat-def Suc-lessD a1 diff-Suc-1 zero-less-Suc)
        qed
    qed

  have output-eq: ∀ x. hd (tl(inouts_v' x)) = hd(inouts_v' x)
    using a2 by (smt hd-Cons-tl list.inject not-gr0 tl-Nil)
  have input4-x: inouts_v (x)!4 = 0
    using output-at-x output-eq by (simp add: a81)
  have input4-x-1: inouts_v (Suc x)!4 = 0
    using output-at-x-1 output-eq by (simp add: a81)
  have input4-q: ∀ q<200. inouts_v (Suc (Suc (x + xa + q)))!4 = 0
    using output-at-q a81 output-eq by auto
  have a12': ∀ xb<xa. (inouts_v (Suc (Suc (x + xb))))!(4) = 0
    using a12 a81 using output-eq by auto
```

have *input4-x-to-q*: $\forall\, q{::}nat\ .\ (q < xa \longrightarrow inouts_v\ (Suc\ (Suc\ (x + q)))!4 = 0) \wedge$
$(q \geq xa \wedge q < xa + 200 \longrightarrow inouts_v\ (Suc\ (Suc\ (x + q)))!4 = 0)$
using *input4-q a12'* **apply** (*simp*)
apply (*rule allI*, *clarify*)
by (*metis* (*full-types*) *add-less-cancel-left le-Suc-ex semiring-normalization-rules*(*25*))

have *latch-m-1*: *latch-rec-calc-output*
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
$hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
$then\ 0\ else\ 1)$
$(Suc\ x) = 1$
apply (*simp*)
using *a3 a4 a5 a6 a7 a8*
by (*metis hd-conv-nth input4-x len-inouts list.size*(*3*) *zero-neq-numeral zero-neq-one*)

have *latch-1-q-200*: $\forall\, q \leq (xa + 200)\ .$ *latch-rec-calc-output*
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
$hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
$then\ 0\ else\ 1)$
$(Suc\ (Suc\ (x+q))) = 1$
apply (*rule allI*)
proof −
fix *q*::*nat*
show $q \leq xa + 200 \longrightarrow$
latch-rec-calc-output
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!(2) = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!(2) = 8\ then\ 0$
$else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!(3) = 0 \wedge inouts_v\ (n1 - Suc\ 0)!(4) = 0\ then\ 0\ else\ 1)$
$(Suc\ (Suc\ (x + q))) = 1$
proof (*induct q*)
case *0*
then show *?case*
using *a6 input4-x-1 latch-m-1* **by** *auto*
next
case (*Suc q*)
then show *?case*
proof −
assume *a1*: $q \leq xa + 200 \longrightarrow$
latch-rec-calc-output
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!(2) = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!(2) = 8\ then\ 0$
$else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!(3) = 0 \wedge inouts_v\ (n1 - Suc\ 0)!(4) = 0\ then\ 0\ else\ 1)$
$(Suc\ (Suc\ (x + q))) = 1$
have *1*: $Suc\ q \leq xa + 200 \longrightarrow$
((*latch-rec-calc-output*
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!(2) = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v$

```
n1!(2) = 8 then 0
                    else 1)
                 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧ inouts_v (n1 − Suc 0)!(4) = 0
then 0 else 1)
                 (Suc (Suc (x + Suc q)))) = (latch-rec-calc-output
                (λn1. if inouts_v (n1 − Suc 0)!(2) = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!(2) = 8 then 0
                    else 1)
                 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧ inouts_v (n1 − Suc 0)!(4) = 0
then 0 else 1)
                 (Suc (Suc (x + q)))))
               apply (clarify)
               proof −
                 assume a1: Suc q ≤ xa + 200
                 have 1: (λn1. if inouts_v (n1 − Suc 0)!(2) = 4 ⟶
                       hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!(2) = 8 then 0 else 1)
                    (Suc (Suc (x + Suc q))) = 0
                   using a10 a1 by auto
                 have 2: (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧
                        inouts_v (n1 − Suc 0)!(4) = 0 then 0 else 1)
                    (Suc (Suc (x + Suc q))) = 0
                   apply (simp)
                   apply (rule conjI)
                   using a10 apply (smt Suc-leD a1)
                   using input4-x-to-q a1
                   by (metis Suc-le-eq le-eq-less-or-eq nat-le-linear)
                 show ((latch-rec-calc-output
                     (λn1. if inouts_v (n1 − Suc 0)!(2) = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬
inouts_v n1!(2) = 8 then 0
                         else 1)
                    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧ inouts_v (n1 − Suc 0)!(4) = 0
then 0 else 1)
                     (Suc (Suc (x + Suc q)))) = (latch-rec-calc-output
                     (λn1. if inouts_v (n1 − Suc 0)!(2) = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬
inouts_v n1!(2) = 8 then 0
                         else 1)
                    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧ inouts_v (n1 − Suc 0)!(4) = 0
then 0 else 1)
                     (Suc (Suc (x + q)))))
                   using 1 2 by (smt add-Suc-right latch-rec-calc-output.simps(2))
               qed

             show Suc q ≤ xa + 200 ⟶
               latch-rec-calc-output
               (λn1. if inouts_v (n1 − Suc 0)!(2) = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!(2) = 8 then 0
                    else 1)
                 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧ inouts_v (n1 − Suc 0)!(4) = 0
then 0 else 1)
                 (Suc (Suc (x + Suc q))) = 1
              using 1 a1 by linarith
            qed
          qed
        qed
      have latch-at-202:
```

latch-rec-calc-output
(λ*n1*. *if* $inouts_v$ (*n1* − *Suc 0*)!*2* = *4* ⟶
hd ($inouts_v$ *n1*) = *0* ∨ *n1* = *0* ∨ ¬ $inouts_v$ *n1*!*2* = *8*
then 0 else 1)
(λ*n1*. *if n1* = *0* ∨ ¬ $inouts_v$ (*n1* − *Suc 0*)!*3* = *0* ∧ $inouts_v$ (*n1* − *Suc 0*)!*4* = *0*
then 0 else 1) (*202* + (*x* + *xa*)) = *1*
proof −
have *1*: *latch-rec-calc-output*
(λ*n1*. *if* $inouts_v$ (*n1* − *Suc 0*)!*2* = *4* ⟶
hd ($inouts_v$ *n1*) = *0* ∨ *n1* = *0* ∨ ¬ $inouts_v$ *n1*!*2* = *8*
then 0 else 1)
(λ*n1*. *if n1* = *0* ∨ ¬ $inouts_v$ (*n1* − *Suc 0*)!*3* = *0* ∧ $inouts_v$ (*n1* − *Suc 0*)!*4* = *0*
then 0 else 1)
(*Suc* (*Suc* (*x*+*xa*+*200*))) = *1*
using *latch-1-q-200*
by (*metis* (*no-types*, *lifting*) *add.assoc add-le-cancel-left add-less-cancel-left mono-nat-linear-lb*)
have *2*: (*Suc* (*Suc* (*x*+*xa*+*200*))) = (*202* + (*x* + *xa*))
by *auto*
show *?thesis*
using *1 2* **by** *simp*
qed

have *count-at-198*:
vT-fd-sol-1 (λ*n1*. *200*) (λ*n1*. *if hd* ($inouts_v$ *n1*) = *0 then 1 else 0*) (*200* + (*x* + *xa*)) = *199*
proof −
have *1*: *vT-fd-sol-1* (λ*n1*. *200*) (λ*n1*. *if hd* ($inouts_v$ *n1*) = *0 then 1 else 0*)
(*Suc* (*Suc* (*x* + *xa* + *198*))) = *199*
using *130* **by** (*metis* (*no-types*, *lifting*) *Suc-numeral less-add-Suc2 numeral-Bit0 numeral-Bit1*
of-nat-numeral one-plus-numeral semiring-norm(*3*) *semiring-norm*(*5*) *semiring-norm*(*8*))
have *2*: (*200* + (*x* + *xa*)) = (*Suc* (*Suc* (*x* + *xa* + *198*)))
by *auto*
show *?thesis*
using *1 2* **by** *presburger*
qed
have *count-at-199*:
vT-fd-sol-1 (λ*n1*. *200*) (λ*n1*. *if hd* ($inouts_v$ *n1*) = *0 then 1 else 0*) (*201* + (*x* + *xa*)) = *200*
proof −
have *1*: *vT-fd-sol-1* (λ*n1*. *200*) (λ*n1*. *if hd* ($inouts_v$ *n1*) = *0 then 1 else 0*)
(*Suc* (*Suc* (*x* + *xa* + *199*))) = *200*
using *130*
by (*metis Suc-numeral lessI numeral-plus-one of-nat-numeral semiring-norm*(*5*) *semiring-norm*(*8*))
have *2*: (*201* + (*x* + *xa*)) = (*Suc* (*Suc* (*x* + *xa* + *199*)))
by *auto*
show *?thesis*
using *1 2* **by** *presburger*
qed

have $inouts_v$ (*Suc* (*Suc* (*x* + *xa* + *199*)))!*0* = *0*
using *a9 len-inouts*
by (*metis Suc-numeral le-eq-less-or-eq lessI semiring-norm*(*5*) *semiring-norm*(*8*))
then have *hd*($inouts_v$ (*Suc* (*Suc* (*x* + *xa* + *199*)))) = *0*
using *a9 len-inouts* **by** (*smt hd-conv-nth list.size*(*3*) *zero-neq-numeral*)
then have *a9-199*: *hd* ($inouts_v$ (*201* + (*x* + *xa*))) = *0*
by (*simp add*: *semiring-normalization-rules*(*25*))

```
    have a9-200-0: inouts_v (Suc (Suc (x + xa + 200)))!0 = 0
      using a9 len-inouts by blast
    then have hd(inouts_v (Suc (Suc (x + xa + 200)))) = 0
      using a9 len-inouts by (smt hd-conv-nth list.size(3) zero-neq-numeral)
    then have a9-200: hd(inouts_v (202 + (x + xa))) = 0
      by (simp add: semiring-normalization-rules(25))
    have output-at-p-200-imply: (?P (Suc (Suc (x + xa + 200)))) ⟶ (inouts_v' (202 + (x + xa)) =
[1,1])
      apply (simp)
      apply (simp add: a9-199)
      apply (simp add: 1 11)
      apply (simp add: count-at-198)
      apply (simp add: a9-200)
      apply (simp add: count-at-199)
      by (simp add: latch-at-202)
    have output-at-p-200: (?P (Suc (Suc (x + xa + 200))))
      using a2 by smt
    show inouts_v' (202 + (x + xa)) = [1,1]
      using output-at-p-200 output-at-p-200-imply by fastforce
  qed
```

Secondly to verify the refinement relation for the feedback.

```
lemma req-01-ref: req-01-1-contract f_D (4, 1) ⊑ plf-rise1shot-simp f_D (4, 1)
  apply (rule feedback-mono[of 5 2])
  using SimBlock-req-01-1-contract apply (blast)
  using post-landing-finalize-1-simblock apply (blast)
  using req-01-ref-plf-rise1shot apply (blast)
  by (auto)
```

Thirdly to verify the requirement contract satisfied by the feedback of *req-01-1-contract*.

```
lemma req-01-fd-ref:
  req-01-contract ⊑ req-01-1-contract f_D (4, 1)
  using inps-req-01-1-contract outps-req-01-1-contract apply (simp add: PreFD-def PostFD-def)
  proof −
    show req-01-contract ⊑ (∃ x · (true ⊢_n
          (∀ n · #_u($inouts(«n»)_a) =_u «4» ∧ #_u($inouts´(«n»)_a) =_u «5» ∧ $inouts´(«n»)_a =_u
«f-PreFD x 4»($inouts)_a(«n»)_a)) ; ;
          req-01-1-contract ; ;
          (true ⊢_n
           (∀ n · #_u($inouts(«n»)_a) =_u «2» ∧
                 #_u($inouts´(«n»)_a) =_u «Suc 0» ∧
            $inouts´(«n»)_a =_u «f-PostFD (Suc 0)»($inouts)_a(«n»)_a ∧ «uapply»($inouts(«n»)_a)_a(«Suc
0»)_a =_u «x n»)))
      apply (simp (no-asm) add: req-01-1-contract-def req-01-contract-def)

      apply (rel-simp)
      apply (simp add: f-PostFD-def f-PreFD-def)
      proof −
        fix ok_v::bool and inouts_v::nat⇒real list and
            ok_v'::bool and inouts_v'::nat⇒real list and x::nat⇒real and
            ok_v''::bool and  inouts_v''::nat⇒real list and ok_v'''::bool and
            inouts_v'''::nat⇒real list
        assume a1: (∀ xa. (hd (inouts_v xa • [x xa]) = 0 ∨ hd (inouts_v xa • [x xa]) = 1) ∧
              (inouts_v xa • [x xa])!(Suc 0) = c-door-open-time ∧
```

$((inouts_v\ xa \bullet [x\ xa])!3 = 0 \vee (inouts_v\ xa \bullet [x\ xa])!3 = 1)) \longrightarrow$
$ok_v''' \wedge$
$(\forall x.\ length(inouts_v'''\ x) = 2) \wedge$
$(\forall xa.\ (inouts_v\ xa \bullet [x\ xa])!3 = 1 \wedge$
$(inouts_v\ xa \bullet [x\ xa])!2 = 4 \wedge$
$(inouts_v\ xa \bullet [x\ xa])!0 = 1 \wedge$
$(inouts_v\ (Suc\ xa) \bullet [x\ (Suc\ xa)])!3 = 1 \wedge$
$(inouts_v\ (Suc\ xa) \bullet [x\ (Suc\ xa)])!2 = 8 \wedge$
$(inouts_v\ (Suc\ xa) \bullet [x\ (Suc\ xa)])!0 = 1 \wedge (\forall xa.\ hd\ (tl(inouts_v'''\ xa)) = (inouts_v\ xa \bullet [x\ xa])!4) \longrightarrow$
$(\forall xb.\ (\forall xc{\leq}200.\ (inouts_v\ (Suc\ (Suc\ (xa + xb + xc))) \bullet [x\ (Suc\ (Suc\ (xa + xb + xc)))])!0 = 0) \wedge$
$(\forall xc{\leq}xb + 200.$
$(inouts_v\ (Suc\ (Suc\ (xa + xc))) \bullet [x\ (Suc\ (Suc\ (xa + xc)))])!3 = 1 \wedge$
$(inouts_v\ (Suc\ (Suc\ (xa + xc))) \bullet [x\ (Suc\ (Suc\ (xa + xc)))])!2 = 8) \wedge$
$(inouts_v\ (Suc\ (xa + xb)) \bullet [x\ (Suc\ (xa + xb))])!0 = 1 \wedge$
$(\forall xc{<}xb.\ hd\ (inouts_v'''\ (Suc\ (Suc\ (xa + xc)))) = 0) \longrightarrow$
$inouts_v'''\ (202 + (xa + xb)) = [1,\ 1]))$

assume *a2*: $ok_v''' \longrightarrow$
$ok_v' \wedge$
$(\forall xa.\ length(inouts_v'''\ xa) = 2 \wedge$
$length(inouts_v'\ xa) = Suc\ 0 \wedge$
$inouts_v'\ xa = take\ (Suc\ 0)\ (inouts_v'''\ xa) \bullet drop\ (Suc\ (Suc\ 0))\ (inouts_v'''\ xa)$
$\wedge\ inouts_v'''\ xa!(Suc\ 0) = x\ xa)$

assume *a3*: $\forall x.\ (hd\ (inouts_v\ x) = 0 \vee hd\ (inouts_v\ x) = 1) \wedge$
$inouts_v\ x!(Suc\ 0) = c\text{-}door\text{-}open\text{-}time \wedge (inouts_v\ x!3 = 0 \vee inouts_v\ x!3 = 1)$

assume *a4*: $\forall xa.\ length(inouts_v\ xa) = 4 \wedge length(inouts_v''\ xa) = 5 \wedge$
$inouts_v''\ xa = take\ 4\ (inouts_v\ xa) \bullet x\ xa\ \#\ drop\ 4\ (inouts_v\ xa)$

from *a4* **have** *1*: $\forall xa.\ length(inouts_v\ xa) = 4$
by *blast*

have *2*: $(\forall xa.\ (((hd\ (inouts_v\ xa \bullet [x\ xa]) = 0 \vee hd\ (inouts_v\ xa \bullet [x\ xa]) = 1) \wedge$
$(inouts_v\ xa \bullet [x\ xa])!(Suc\ 0) = c\text{-}door\text{-}open\text{-}time \wedge$
$((inouts_v\ xa \bullet [x\ xa])!3 = 0 \vee (inouts_v\ xa \bullet [x\ xa])!3 = 1))$
$= ((hd\ (inouts_v\ xa) = 0 \vee hd\ (inouts_v\ xa) = 1) \wedge$
$inouts_v\ xa!(Suc\ 0) = c\text{-}door\text{-}open\text{-}time \wedge (inouts_v\ xa!3 = 0 \vee inouts_v\ xa!3 = 1))))$
using *1*
by (*metis Suc-mono Suc-numeral hd-append2 length-greater-0-conv nth-append numeral-2-eq-2 numeral-3-eq-3 semiring-norm*(2) *semiring-norm*(8) *zero-less-Suc*)

have *3*: ok_v'''
using *2 a3 a1* **by** *simp*

have *4*: ok_v'
using *a2 3* **by** *blast*

have *5*: $\forall xa.\ inouts_v'\ xa = [hd\ (inouts_v'''\ xa)]$
using *3 a2* **by** (*metis append-eq-conv-conj length-Cons list.size*(3) *list-equal-size2 self-append-conv*)

have *6*: $\forall xa.\ inouts_v'''\ xa!(Suc\ 0) = x\ xa$
using *a2 3* **by** *blast*

have *input-at-3*: $\forall xa.\ (inouts_v\ xa \bullet [x\ xa])!3 = inouts_v\ xa!3$
using *1* **by** (*simp add*: *nth-append*)

have *input-at-2*: $\forall xa.\ (inouts_v\ xa \bullet [x\ xa])!2 = inouts_v\ xa!2$
using *1* **by** (*simp add*: *nth-append*)

have *input-at-1*: $\forall xa.\ (inouts_v\ xa \bullet [x\ xa])!1 = inouts_v\ xa!1$
using *1* **by** (*simp add*: *nth-append*)

have *input-at-0*: $\forall xa.\ (inouts_v\ xa \bullet [x\ xa])!0 = inouts_v\ xa!0$
using *1* **by** (*simp add*: *nth-append*)

have *input-at-4*: $\forall xa.\ (inouts_v\ xa \bullet [x\ xa])!4 = x\ xa$

```
    using 1 by (simp add: nth-append)
  have feedback: (∀ xa. hd (tl(inouts_v''' xa)) = (inouts_v xa • [x xa])!4) =
      (∀ xa. (inouts_v''' xa)!(Suc 0) = (x xa))
    by (metis 3 One-nat-def a2 diff-Suc-1 hd-conv-nth input-at-4 length-greater-0-conv
      length-tl nth-tl numeral-2-eq-2 zero-less-one)
  have a1':
   (∀ x. length(inouts_v''' x) = 2) ∧
   (∀ xa. (inouts_v xa)!3 = 1 ∧
      (inouts_v xa)!2 = 4 ∧
      (inouts_v xa)!0 = 1 ∧
      (inouts_v (Suc xa))!3 = 1 ∧
      (inouts_v (Suc xa))!2 = 8 ∧
      (inouts_v (Suc xa))!0 = 1 ∧ (∀ xa. (inouts_v''' xa)!(Suc 0) = (x xa)) ⟶
      (∀ xb. (∀ xc≤200. (inouts_v (Suc (Suc (xa + xb + xc))))!0 = 0) ∧
          (∀ xc≤xb + 200.
            (inouts_v (Suc (Suc (xa + xc))))!3 = 1 ∧
            (inouts_v (Suc (Suc (xa + xc))))!2 = 8) ∧
          (inouts_v (Suc (xa + xb)))!0 = 1 ∧
          (∀ xc<xb. hd (inouts_v''' (Suc (Suc (xa + xc)))) = 0) ⟶
          inouts_v''' (202 + (xa + xb)) = [1, 1]))
    using input-at-0 input-at-1 input-at-2 input-at-3 input-at-4 a1 6 2 3 a3 feedback
    by simp
  show ok_v' ∧
    (∀ x. length(inouts_v' x) = Suc 0) ∧
    (∀ x. inouts_v x!3 = 1 ∧
        inouts_v x!2 = 4 ∧ inouts_v x!0 = 1 ∧ inouts_v (Suc x)!3 = 1 ∧
        inouts_v (Suc x)!2 = 8 ∧ inouts_v (Suc x)!0 = 1 ⟶
        (∀ xa. (∀ xb≤200. inouts_v (Suc (Suc (x + xa + xb)))!0 = 0) ∧
            (∀ xb≤xa + 200. inouts_v (Suc (Suc (x + xb)))!3 = 1 ∧ inouts_v (Suc (Suc (x +
xb)))!2 = 8) ∧
            inouts_v (Suc (x + xa))!0 = 1 ∧ (∀ xb<xa. hd (inouts_v' (Suc (Suc (x + xb)))) = 0)
⟶
            inouts_v' (202 + (x + xa)) = [1]))
    apply (rule conjI)
    using 4 apply (simp)
    apply (rule conjI)
    using 3 a2 apply blast
    apply (rule allI, clarify)
    using a1' apply (auto)
    by (simp add: 5 6)
 qed
qed
```

Finally, the requirement is held for the *post-landing-finalize-1* because of transitivity of refinement relation.

```
lemma req-01:
  req-01-contract ⊑ post-landing-finalize-1
  apply (simp only: post-landing-finalize-1-simp)
  using req-01-fd-ref req-01-ref by auto
```

C.5.2 Requirement 02

post-landing-finalize-req-02: A finalize event is broadcast only once while the aircraft is on the ground.

req-02-contract is the requirement to be verified. Its precondition is the same as *req-01-contract*. Its postcondition specifies that

- it always has four inputs and one output;
- the requirement:
  - if a finalize event has been broadcast at step m,
  - while the aircraft is on ground: *ac-on-ground* is true and *mode=GROUND*,
  - then a finalize event won't be broadcast again.

definition *req-02-contract* $\equiv$ (($\forall$ *n::nat* $\cdot$ (
«($\lambda x\ n.$
(
(*hd*(*x n*) = *0* $\vee$ *hd*(*x n*) = *1*) $\wedge$ (* *door-closed is boolean* *)
((*x n*)!*1* = *c-door-open-time*) $\wedge$ (* *door-open-time* *)
((*x n*)!*3* = *0* $\vee$ (*x n*)!*3* = *1*) (* *ac-on-ground is boolean* *)
))» (&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
$\vdash_n$
(($\forall$ *n::nat* $\cdot$
((#$_u$($*inouts* («*n*»)$_a$)) =$_u$ «*4*») $\wedge$
((#$_u$($*inouts*´ («*n*»)$_a$)) =$_u$ «*1*»)) $\wedge$
(* *m* : *finalize-event*
... : *mode is GROUND and ac-on-ground is true*
p : *mode is GROUND and ac-on-ground is true* $\Rightarrow$ $\neg$*finalize-event*
*)
($\forall$ *m::nat* $\cdot$
(
(*head*$_u$($*inouts*´ («*m*»)$_a$) =$_u$ *1*) (* *finalize-event at m* *)
$\Rightarrow$
(
$\forall$ *p::nat* $\cdot$
(
($\forall$ *q::nat* $\cdot$ ((«*q*» $\leq_u$ «*p*») $\Rightarrow$
((«*nth*» ($*inouts* («*m+1+q*»)$_a$)$_a$ (*3*)$_a$ =$_u$ *1*) (* *ac-on-ground = true* *) $\wedge$
(«*nth*» ($*inouts* («*m+1+q*»)$_a$)$_a$ (*2*)$_a$ =$_u$ *8*) (* *mode = GROUND* *)))
) (* *the aircraft is always on the ground from m+1 to m+1+p* *)
$\Rightarrow$ ($*inouts*´ («*m+1+p*»)$_a$) =$_u$ $\langle$*0*$\rangle$(* *then the finalize-event is false.* *)
)
)
))))

req-02-1-contract is the contract for *post-landing-finalize-1* without feedback: *plf-rise1shot-simp*. It is similar to *req-02-contract* except that 1) it has five inputs and two outputs (the feedback operator will remove one input and one output); 2) the 2nd output is equal to the 4th input since they are connected together by the feedback loop.

definition *req-02-1-contract* $\equiv$ (($\forall$ *n::nat* $\cdot$ (
«($\lambda x\ n.$
(
(*hd*(*x n*) = *0* $\vee$ *hd*(*x n*) = *1*) $\wedge$ (* *door-closed is boolean* *)
((*x n*)!*1* = *c-door-open-time*) $\wedge$ (* *door-open-time* *)
((*x n*)!*3* = *0* $\vee$ (*x n*)!*3* = *1*) (* *ac-on-ground is boolean* *)
))» (&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
$\vdash_n$

```
((∀ n::nat ·
  ((#u($inouts («n»)a)) =u «5») ∧
  ((#u($inouts´ («n»)a)) =u «2»)) ∧
  (∗ m    : finalize-event
     ...  : mode is GROUND and ac-on-ground is true
     p    : mode is GROUND and ac-on-ground is true ⇒ ¬finalize-event
  ∗)
  (∀ m::nat ·
    (
     (headu($inouts´ («m»)a) =u 1) (∗ finalize-event at m ∗) ∧
     (∀ n::nat · (headu(tailu($inouts´ («n»)a)) =u «nth» ($inouts («n»)a)a (4)a))
     ⇒
     (
       ∀ p::nat ·
        (
         (∀ q::nat · ((«q» ≤u «p») ⇒
               ((«nth» ($inouts («m+1+q»)a)a (3)a =u 1) (∗ ac-on-ground = true ∗) ∧
                («nth» ($inouts («m+1+q»)a)a (2)a =u 8) (∗ mode = GROUND ∗)))
         ) (∗ the aircraft is always on the ground from m+1 to m+1+p ∗)
         ⇒ ($inouts´ («m+1+p»)a) =u ⟨0,0⟩(∗ then the finalize-event is false. ∗)
        )
     )
  ))))
```

lemma *SimBlock-req-02-1-contract*:
SimBlock 5 2 req-02-1-contract
apply (*simp add*: *SimBlock-def req-02-1-contract-def*)
apply (*rel-auto*)
apply (*rule-tac x* = λ*na*. [*1*, *20*, *if na* = *1 then 8 else 4*, *1*, *0*] **in** *exI*)
apply (*rule conjI*, *simp*)
apply (*rule-tac x* = λ*na*. [*0*, *0*] **in** *exI*)
by (*simp*)

lemma *inps-req-02-1-contract*:
inps req-02-1-contract = *5*
using *SimBlock-req-02-1-contract inps-P* **by** *blast*

lemma *outps-req-02-1-contract*:
outps req-02-1-contract = *2*
using *SimBlock-req-02-1-contract outps-P* **by** *blast*

In order to verify this requirement, firstly to verify the contract *req-02-1-contract* refined by *plf-rise1shot-simp*.

lemma *req-02-ref-plf-rise1shot*: *req-02-1-contract* ⊑ *plf-rise1shot-simp*
apply (*simp add*: *FBlock-def plf-rise1shot-simp-def req-02-1-contract-def*)
apply (*rule ndesign-refine-intro*)
apply *simp*
apply (*unfold upred-defs urel-defs*)
apply (*simp add*: *fun-eq-iff relcomp-unfold OO-def*
lens-defs upred-defs alpha-splits Product-Type.split-beta)*?*
apply (*transfer*)
apply (*simp*; *safe*)
proof −
fix $inouts_v$ $inouts_v'$::*nat* ⇒ *real list* **and** *x*::*nat* **and** *xa*::*nat*
assume *a1*: ∀ *x*. (*hd* ($inouts_v$ *x*) = *0* ∨ *hd* ($inouts_v$ *x*) = *1*) ∧

$inouts_v\ x!(Suc\ 0) = c\text{-}door\text{-}open\text{-}time \wedge (inouts_v\ x!3 = 0 \vee inouts_v\ x!3 = 1)$

let $?P = \lambda x.\ (x \leq Suc\ 0 \longrightarrow$
$(hd\ (inouts_v\ 0) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 1 \longrightarrow$
$(x = 0 \longrightarrow length(inouts_v\ 0) = 5 \wedge length(inouts_v{}'\ 0) = 2 \wedge [0, 0] = inouts_v{}'\ 0) \wedge$
$(0 < x \longrightarrow$
$(hd\ (inouts_v\ x) = 0 \longrightarrow$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))$
$< min\ 1\ (real\text{-}of\text{-}int$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))) +$
$1 \longrightarrow$
$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
$hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
$then\ 0\ else\ 1)$
$x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [1, 1] = inouts_v{}'\ x) \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
$hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0$
$else\ 1)$
$x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0, 0] = inouts_v{}'\ x)) \wedge$
$(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))$
$< min\ 1\ (real\text{-}of\text{-}int$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))) +$
$1 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v{}'\ x) = 2 \wedge$
$[0, 0] = inouts_v{}'\ x \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
$hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0$
$else\ 1)$
$x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0, 0] = inouts_v{}'\ x))) \wedge$
$(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow$
$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow$
$hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0$
$then\ 0\ else\ 1)$
$x =$
$0 \longrightarrow$

$$
\begin{array}{l}
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad (\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge \\
\quad\ length(inouts_v'\ x) = 2 \wedge \\
\quad\ [0,\ 0] = inouts_v'\ x \wedge \\
\quad\ (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))) \wedge \\
\quad (\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 1 \longrightarrow \\
\quad\ (x = 0 \longrightarrow \\
\quad\ length(inouts_v\ 0) = 5 \wedge \\
\quad\ length(inouts_v'\ 0) = 2 \wedge \\
\quad\ [0,\ 0] = inouts_v'\ 0 \wedge length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
\quad\ (0 < x \longrightarrow \\
\quad\ (hd\ (inouts_v\ x) = 0 \longrightarrow \\
\quad\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad\ < min\ 1\ (real\text{-}of\text{-}int \\
\qquad\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + \\
\quad\ 1 \longrightarrow \\
\quad\ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad then\ 0\ else\ 1) \\
\quad\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad\ (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad\ (\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad\ \ < min\ 1\ (real\text{-}of\text{-}int
\end{array}
$$

$$
\begin{array}{l}
\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\ then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\ then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\ then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\ then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))))) \wedge \\
(\neg\ hd\ (inouts_v\ 0) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(x = 0 \longrightarrow length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
(0 < x \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
< min\ 0\ (real\text{-}of\text{-}int \\
\qquad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))) +
\end{array}
$$

$$
\begin{array}{l}
\quad 1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad then\ 0\ else\ 1) \\
\quad\ x = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ 0\ (real\text{-}of\text{-}int \\
\qquad\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))) + \\
\quad\ 1 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad then\ 0\ else\ 1) \\
\quad\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge
\end{array}
$$

$$
\begin{array}{l}
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\ length(inouts_v\ x) = 5 \wedge \\
\ length(inouts_v'\ x) = 2 \wedge \\
\ [0,\ 0] = inouts_v'\ x \wedge \\
\ (latch\text{-}rec\text{-}calc\text{-}output \\
\ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\ \ \ \ \ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\ \ \ \ then\ 0\ else\ 1) \\
\ \ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\ \ \ \ else\ 1) \\
\ \ x = \\
\ \ 0 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\ (x = 0 \longrightarrow \\
\ length(inouts_v\ 0) = 5 \wedge \\
\ length(inouts_v'\ 0) = 2 \wedge \\
\ [0,\ 0] = inouts_v'\ 0 \wedge length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v' \\
0) \wedge \\
\ (0 < x \longrightarrow \\
\ (hd\ (inouts_v\ x) = 0 \longrightarrow \\
\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\ \ < min\ 0\ (real\text{-}of\text{-}int \\
\ \ \ \ \ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))\ + \\
\ \ 1 \longrightarrow \\
\ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\ \ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\ \ \ \ \ \ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\ \ \ \ \ then\ 0\ else\ 1) \\
\ \ \ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\ \ \ \ \ then\ 0\ else\ 1) \\
\ \ \ x = \\
\ \ \ 0 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\ (latch\text{-}rec\text{-}calc\text{-}output \\
\ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\ \ \ \ \ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\ \ \ \ then\ 0\ else\ 1) \\
\ \ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\ \ \ \ else\ 1) \\
\ \ x = \\
\ \ 0 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\ (\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\ \ \ < min\ 0\ (real\text{-}of\text{-}int \\
\ \ \ \ \ \ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))\ + \\
\ \ \ 1 \longrightarrow \\
\ \ length(inouts_v\ x) = 5 \wedge \\
\ \ length(inouts_v'\ x) = 2 \wedge \\
\ \ [0,\ 0] = inouts_v'\ x \wedge \\
\ \ (latch\text{-}rec\text{-}calc\text{-}output \\
\ \ \ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\ \ \ \ \ \ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\ \ \ \ \ then\ 0\ else\ 1) \\
\ \ \ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0
\end{array}
$$

```
                else 1)
             x =
            0 ⟶
            length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
          (¬ hd (inouts_v x) = 0 ⟶
           (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
            (¬ latch-rec-calc-output
                (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
                      then 0 else 1)
                (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
                      then 0 else 1)
                x =
               0 ⟶
              length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
             (latch-rec-calc-output
              (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                      hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
                    then 0 else 1)
              (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
                    else 1)
               x =
              0 ⟶
              length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
            (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
             length(inouts_v x) = 5 ∧
             length(inouts_v' x) = 2 ∧
             [0, 0] = inouts_v' x ∧
             (latch-rec-calc-output
              (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                      hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
                    then 0 else 1)
              (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
                    else 1)
               x =
              0 ⟶
              length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)))))) ∧
         (¬ x ≤ Suc 0 ⟶
          (hd (inouts_v (x − Suc 0)) = 0 ⟶
           (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))
            < min (vT-fd-sol-1
                    (λn1. real-of-int
                            (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
                    (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc (Suc 0)))
             (real-of-int
              (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc (Suc 0))!(Suc 0)) 0⌉))))
+
             1 ⟶
            (hd (inouts_v x) = 0 ⟶
             (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
              < min (vT-fd-sol-1
                      (λn1. real-of-int
                              (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
                      (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
               (real-of-int
```

```
    (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x - Suc 0)!(Suc 0)) 0⌉)))) +
  1 ⟶
(¬ latch-rec-calc-output
    (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
        then 0 else 1)
    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0
        then 0 else 1)
    x =
   0 ∧
 latch-rec-calc-output
  (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
      then 0 else 1)
 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0 then 0
      else 1)
  (x - Suc 0) =
 0 ⟶
 length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
(latch-rec-calc-output
  (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
      then 0 else 1)
 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0 then 0
      else 1)
  x =
 0 ⟶
 length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x) ∧
(¬ latch-rec-calc-output
    (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
          hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
        then 0 else 1)
    (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0
        then 0 else 1)
    (x - Suc 0) =
   0 ⟶
 length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
   < min (vT-fd-sol-1
          (λn1. real-of-int
                (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
          (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x - Suc 0))
     (real-of-int
      (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x - Suc 0)!(Suc 0)) 0⌉)))) +
    1 ⟶
length(inouts_v x) = 5 ∧
length(inouts_v' x) = 2 ∧
[0, 0] = inouts_v' x ∧
(latch-rec-calc-output
  (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
      then 0 else 1)
 (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0 then 0
      else 1)
  x =
```

$$
\begin{array}{l}
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \wedge \\
latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad (x - Suc\ 0) = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\quad else\ 1) \\
\quad x = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\quad then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8
\end{array}
$$

```
        then 0 else 1)
     (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
        else 1)
     x =
     0 ⟶
     length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x) ∧
    (¬ latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
           then 0 else 1)
        (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
           then 0 else 1)
        (x − Suc 0) =
        0 ⟶
     length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)))) ∧
   (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc 0)!(Suc 0))
0⌉)))
     < min (vT-fd-sol-1
           (λn1. real-of-int
                 (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v n1!(Suc 0)) 0⌉))))
           (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc (Suc 0)))
        (real-of-int
          (int32 (RoundZero
                 (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc (Suc 0))!(Suc 0)) 0⌉)))) +
        1 ⟶
   (hd (inouts_v x) = 0 ⟶
    (real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)))
     < min (vT-fd-sol-1
           (λn1. real-of-int
                 (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v n1!(Suc 0)) 0⌉))))
           (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
        (real-of-int
          (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
        1 ⟶
     (¬ latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
           then 0 else 1)
        (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
           then 0 else 1)
        x =
        0 ⟶
     length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
     (latch-rec-calc-output
       (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
             hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
       (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
       x =
       0 ⟶
     length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
   (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)))
      < min (vT-fd-sol-1
            (λn1. real-of-int
```

```
                (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x − Suc 0))
        (real-of-int
         (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)))) +
        1 ⟶
    length(inouts_v x) = 5 ∧
    length(inouts_v' x) = 2 ∧
    [0, 0] = inouts_v' x ∧
    (latch-rec-calc-output
      (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
            then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
            else 1)
      x =
      0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
  (¬ hd (inouts_v x) = 0 ⟶
   (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
    (¬ latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
              then 0 else 1)
        (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
              then 0 else 1)
        x =
        0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
     (latch-rec-calc-output
       (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
               hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
             then 0 else 1)
       (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
             else 1)
       x =
       0 ⟶
       length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
     (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
      length(inouts_v x) = 5 ∧
      length(inouts_v' x) = 2 ∧
      [0, 0] = inouts_v' x ∧
      (latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
              then 0 else 1)
        (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
              else 1)
        x =
        0 ⟶
        length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))))) ∧
(¬ hd (inouts_v (x − Suc 0)) = 0 ⟶
 (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x − Suc 0)!(Suc 0)) 0⌉)) < 0 ⟶
  (hd (inouts_v x) = 0 ⟶
   (real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
    < min (vT-fd-sol-1
```

```
        (λn1. real-of-int
                (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
        (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x - Suc 0))
    (real-of-int
      (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x - Suc 0)!(Suc 0)) 0⌉)))) +
   1 ⟶
 (¬ latch-rec-calc-output
      (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
            then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0
            then 0 else 1)
      x =
     0 ∧
  latch-rec-calc-output
   (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
           hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
         then 0 else 1)
   (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0 then 0
         else 1)
   (x - Suc 0) =
  0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
 (latch-rec-calc-output
   (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
           hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
         then 0 else 1)
   (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0 then 0
         else 1)
    x =
  0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x) ∧
 (¬ latch-rec-calc-output
      (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
              hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
            then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 - Suc 0)!3 = 0 ∧ inouts_v (n1 - Suc 0)!4 = 0
            then 0 else 1)
      (x - Suc 0) =
     0 ⟶
  length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
 (¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)))
    < min (vT-fd-sol-1
            (λn1. real-of-int
                    (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v n1!(Suc 0)) 0⌉))))
            (λn1. if hd (inouts_v n1) = 0 then 1 else 0) (x - Suc 0))
      (real-of-int
        (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v (x - Suc 0)!(Suc 0)) 0⌉)))) +
      1 ⟶
 length(inouts_v x) = 5 ∧
 length(inouts_v' x) = 2 ∧
 [0, 0] = inouts_v' x ∧
 (latch-rec-calc-output
   (λn1. if inouts_v (n1 - Suc 0)!2 = 4 ⟶
           hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
```

$$
\begin{array}{l}
\quad \textit{then } 0 \textit{ else } 1) \\
\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad \textit{else } 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x) \wedge \\
\quad (\neg\ \textit{latch-rec-calc-output} \\
\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (x - \textit{Suc } 0) = \\
\quad\quad 0 \longrightarrow \\
\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x))) \wedge \\
(\neg\ \textit{hd}\ (\textit{inouts}_v\ x) = 0 \longrightarrow \\
\quad (\textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad (\neg\ \textit{latch-rec-calc-output} \\
\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad x = \\
\quad\quad 0 \wedge \\
\quad \textit{latch-rec-calc-output} \\
\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad\quad \textit{else } 1) \\
\quad\quad (x - \textit{Suc } 0) = \\
\quad\quad 0 \longrightarrow \\
\quad\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \textit{inouts}_v{}'\ x) \wedge \\
\quad\quad (\textit{latch-rec-calc-output} \\
\quad\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \textit{ then } 0 \\
\quad\quad\quad \textit{else } 1) \\
\quad\quad\quad x = \\
\quad\quad\quad 0 \longrightarrow \\
\quad\quad\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x) \wedge \\
\quad\quad\quad (\neg\ \textit{latch-rec-calc-output} \\
\quad\quad\quad\quad (\lambda n1.\ \textit{if inouts}_v\ (n1 - \textit{Suc } 0)!2 = 4 \longrightarrow \\
\quad\quad\quad\quad\quad \textit{hd}\ (\textit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \textit{inouts}_v\ n1!2 = 8 \\
\quad\quad\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad\quad\quad (\lambda n1.\ \textit{if } n1 = 0 \vee \neg\ \textit{inouts}_v\ (n1 - \textit{Suc } 0)!3 = 0 \wedge \textit{inouts}_v\ (n1 - \textit{Suc } 0)!4 = 0 \\
\quad\quad\quad\quad \textit{then } 0 \textit{ else } 1) \\
\quad\quad\quad\quad (x - \textit{Suc } 0) = \\
\quad\quad\quad\quad 0 \longrightarrow \\
\quad\quad\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \textit{inouts}_v{}'\ x)) \wedge \\
\quad\quad (\neg\ \textit{int32}\ (\textit{RoundZero}\ (\textit{real-of-int}\ \lceil \textit{Rate} * \textit{max}\ (\textit{inouts}_v\ x!(\textit{Suc } 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\quad \textit{length}(\textit{inouts}_v\ x) = 5 \wedge \\
\quad\quad \textit{length}(\textit{inouts}_v{}'\ x) = 2 \wedge
\end{array}
$$

$$
\begin{array}{l}
[0,\ 0] = inouts_v'\ x\ \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (x - Suc\ 0) = \\
\qquad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
< min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int \\
\qquad\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\quad (real\text{-}of\text{-}int \\
\quad\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad\quad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad x = \\
\qquad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow \\
\qquad hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0 \\
\qquad else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int \\
\qquad\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\quad (real\text{-}of\text{-}int \\
\quad\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow
\end{array}
$$

```
    length(inouts_v x) = 5 ∧
    length(inouts_v' x) = 2 ∧
    [0, 0] = inouts_v' x ∧
    (latch-rec-calc-output
      (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
      x =
      0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
  (¬ hd (inouts_v x) = 0 ⟶
   (int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
   (¬ latch-rec-calc-output
       (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
             hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
           then 0 else 1)
       (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
           then 0 else 1)
       x =
       0 ⟶
     length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
    (latch-rec-calc-output
      (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
      x =
      0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
   (¬ int32 (RoundZero (real-of-int ⌈Rate ∗ max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
    length(inouts_v x) = 5 ∧
    length(inouts_v' x) = 2 ∧
    [0, 0] = inouts_v' x ∧
    (latch-rec-calc-output
      (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
            hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
          then 0 else 1)
      (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
          else 1)
      x =
      0 ⟶
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))))))
assume a2: ∀x. ?P x

assume a3: hd (inouts_v' x) = 1
assume a4: ∀x. hd (tl (inouts_v' x)) = inouts_v x!(4)
assume a5: ∀xb≤xa. inouts_v (Suc (x + xb))!(3) = 1 ∧ inouts_v (Suc (x + xb))!(2) = 8
have len-inouts: ∀x. length(inouts_v x) = 5
  using a2 by blast
have output-at-0: inouts_v' 0 = [0,0]
  using a2 by (smt One-nat-def zero-le-one)
have output-eq: ∀x. hd (tl(inouts_v' x)) = hd(inouts_v' x)
```

```
    using a2 by (smt hd-Cons-tl list.inject not-gr0 tl-Nil)
  have input-4-at-m: inouts_v x!(4) = 1
    using a3 a4 output-eq by simp
  have latch-at-m-1: latch-rec-calc-output
                (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
                      then 0 else 1)
                (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
                      then 0 else 1)
                (Suc (x)) = 0
    using input-4-at-m a5 by simp
  have latch-m-1-to-p: ∀ q≤xa . latch-rec-calc-output
                (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
                      then 0 else 1)
                (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
                      then 0 else 1)
                (Suc (x+q)) = 0
    apply (rule allI)
    proof −
      fix q::nat
      show q ≤ xa ⟶
       latch-rec-calc-output
        (λn1. if inouts_v (n1 − Suc 0)!(2) = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!(2)
= 8
              then 0 else 1)
         (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!(3) = 0 ∧ inouts_v (n1 − Suc 0)!(4) = 0 then 0
else 1)
        (Suc (x + q)) = 0
        proof (induct q)
          case 0
          then show ?case
            using latch-at-m-1 by simp
        next
          case (Suc q)
          then show ?case
            apply (simp add: latch-rec-calc-output.elims)
            using a5 One-nat-def Suc-leD add-Suc-right diff-Suc-1 by smt
        qed
    qed
  have latch-at-p: latch-rec-calc-output
                (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶
                        hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v n1!2 = 8
                      then 0 else 1)
                (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0
                      then 0 else 1)
                (Suc (x+xa)) = 0
    using latch-m-1-to-p by blast
  show  inouts_v' (Suc (x + xa)) = inouts_v' 0
    using a2 latch-at-p by (smt output-at-0 zero-less-Suc)
qed
```

Secondly to verify the refinement relation for the feedback.

```
lemma req-02-ref: req-02-1-contract f_D (4, 1) ⊑ plf-rise1shot-simp f_D (4, 1)
  apply (rule feedback-mono[of 5 2])
```

using *SimBlock-req-02-1-contract* **apply** (*blast*)
using *post-landing-finalize-1-simblock* **apply** (*blast*)
using *req-02-ref-plf-rise1shot* **apply** (*blast*)
by (*auto*)

Thirdly to verify the requirement contract satisfied by the feedback of *req-02-1-contract*.

lemma *req-02-fd-ref*:
req-02-contract $\sqsubseteq$ *req-02-1-contract* f_D (*4*, *1*)
using *inps-req-02-1-contract outps-req-02-1-contract* **apply** (*simp add*: *PreFD-def PostFD-def*)
proof −
show *req-02-contract* $\sqsubseteq$ ($\exists$ *x* · (*true* $\vdash_n$
($\forall$ *n* · $\#_u$($inouts(«n»)$_a$) =$_u$ «*4*» ∧ $\#_u$($inouts´(«n»)$_a$) =$_u$ «*5*» ∧
$inouts´(«n»)$_a$ =$_u$ «*f-PreFD x 4*»($inouts)$_a$(«n»)$_a$)) ; ;
req-02-1-contract ; ;
(*true* $\vdash_n$
($\forall$ *n* · $\#_u$($inouts(«n»)$_a$) =$_u$ «*2*» ∧
$\#_u$($inouts´(«n»)$_a$) =$_u$ «*Suc 0*» ∧
$inouts´(«n»)$_a$ =$_u$ «*f-PostFD* (*Suc 0*)»($inouts)$_a$(«n»)$_a$ ∧
«*uapply*»($inouts(«n»)$_a$)$_a$(«*Suc 0*»)$_a$ =$_u$ «*x n*»)))
apply (*simp* (*no-asm*) *add*: *req-02-1-contract-def req-02-contract-def*)

apply (*rel-simp*)
apply (*simp add*: *f-PostFD-def f-PreFD-def*)
proof −
fix ok_v::*bool* **and** $inouts_v$::*nat*⇒*real list* **and**
ok_v'::*bool* **and** $inouts_v'$::*nat*⇒*real list* **and** *x*::*nat*⇒*real* **and**
ok_v''::*bool* **and** $inouts_v''$::*nat*⇒*real list* **and** ok_v'''::*bool* **and**
$inouts_v'''$::*nat*⇒*real list*
assume *a1*: (∀ *xa*. (*hd* ($inouts_v$ *xa* • [*x xa*]) = *0* ∨ *hd* ($inouts_v$ *xa* • [*x xa*]) = *1*) ∧
($inouts_v$ *xa* • [*x xa*])!(*Suc 0*) = *c-door-open-time* ∧
(($inouts_v$ *xa* • [*x xa*])!*3* = *0* ∨ ($inouts_v$ *xa* • [*x xa*])!*3* = *1*)) ⟶
ok_v''' ∧
(∀ *x*. *length*($inouts_v'''$ *x*) = *2*) ∧
(∀ *xa*. *hd* ($inouts_v'''$ *xa*) = *1* ∧ (∀ *xa*. *hd* (*tl* ($inouts_v'''$ *xa*)) = ($inouts_v$ *xa* • [*x xa*])!*4*) ⟶
(∀ *xb*. (∀ *xc*≤*xb*. ($inouts_v$ (*Suc* (*xa* + *xc*)) • [*x* (*Suc* (*xa* + *xc*))])!*3* = *1* ∧
($inouts_v$ (*Suc* (*xa* + *xc*)) • [*x* (*Suc* (*xa* + *xc*))])!*2* = *8*) ⟶
$inouts_v'''$ (*Suc* (*xa* + *xb*)) = [*0*, *0*]))
assume *a2*: ok_v''' ⟶
ok_v' ∧
(∀ *xa*. *length*($inouts_v'''$ *xa*) = *2* ∧
length($inouts_v'$ *xa*) = *Suc 0* ∧
$inouts_v'$ *xa* = *take* (*Suc 0*) ($inouts_v'''$ *xa*) • *drop* (*Suc* (*Suc 0*)) ($inouts_v'''$ *xa*) ∧
$inouts_v'''$ *xa*!(*Suc 0*) = *x xa*)
assume *a3*: ∀ *x*. (*hd* ($inouts_v$ *x*) = *0* ∨ *hd* ($inouts_v$ *x*) = *1*) ∧
$inouts_v$ *x*!(*Suc 0*) = *c-door-open-time* ∧ ($inouts_v$ *x*!*3* = *0* ∨ $inouts_v$ *x*!*3* = *1*)
assume *a4*: ∀ *xa*. *length*($inouts_v$ *xa*) = *4* ∧ *length*($inouts_v''$ *xa*) = *5* ∧
$inouts_v''$ *xa* = *take 4* ($inouts_v$ *xa*) • *x xa* # *drop 4* ($inouts_v$ *xa*)
from *a4* **have** *1*: ∀ *xa*. *length*($inouts_v$ *xa*) = *4*
by *blast*
have *2*: (∀ *xa*. ((((*hd* ($inouts_v$ *xa* • [*x xa*]) = *0* ∨ *hd* ($inouts_v$ *xa* • [*x xa*]) = *1*) ∧
($inouts_v$ *xa* • [*x xa*])!(*Suc 0*) = *c-door-open-time* ∧
(($inouts_v$ *xa* • [*x xa*])!*3* = *0* ∨ ($inouts_v$ *xa* • [*x xa*])!*3* = *1*))
= ((*hd* ($inouts_v$ *xa*) = *0* ∨ *hd* ($inouts_v$ *xa*) = *1*) ∧
$inouts_v$ *xa*!(*Suc 0*) = *c-door-open-time* ∧ ($inouts_v$ *xa*!*3* = *0* ∨ $inouts_v$ *xa*!*3* = *1*))))
using *1*

```
    by (metis Suc-mono Suc-numeral hd-append2 length-greater-0-conv nth-append numeral-2-eq-2
        numeral-3-eq-3 semiring-norm(2) semiring-norm(8) zero-less-Suc)
  have 3: ok_v'''
    using 2 a3 a1 by simp
  have 4: ok_v'
    using a2 3 by blast
  have 5: ∀ xa. inouts_v' xa = [hd (inouts_v''' xa)]
  using 3 a2 by (metis append-eq-conv-conj length-Cons list.size(3) list-equal-size2 self-append-conv)
  have 6: ∀ xa. inouts_v''' xa!(Suc 0) = x xa
    using a2 3 by blast
  have input-at-3: ∀ xa. (inouts_v xa • [x xa])!3 = inouts_v xa!3
    using 1 by (simp add: nth-append)
  have input-at-2: ∀ xa. (inouts_v xa • [x xa])!2 = inouts_v xa!2
    using 1 by (simp add: nth-append)
  have input-at-1: ∀ xa. (inouts_v xa • [x xa])!1 = inouts_v xa!1
    using 1 by (simp add: nth-append)
  have input-at-0: ∀ xa. (inouts_v xa • [x xa])!0 = inouts_v xa!0
    using 1 by (simp add: nth-append)
  have input-at-4: ∀ xa. (inouts_v xa • [x xa])!4 = x xa
    using 1 by (simp add: nth-append)
  have feedback: (∀ xa. hd (tl(inouts_v''' xa)) = (inouts_v xa • [x xa])!4) =
      (∀ xa. (inouts_v''' xa)!(Suc 0) = (x xa))
    by (metis 3 One-nat-def a2 diff-Suc-1 hd-conv-nth input-at-4 length-greater-0-conv
        length-tl nth-tl numeral-2-eq-2 zero-less-one)
  have a1': (∀ x. length(inouts_v''' x) = 2) ∧
    (∀ xa. hd (inouts_v''' xa) = 1 ∧ (∀ xa. hd (tl (inouts_v''' xa)) = (inouts_v xa • [x xa])!4) ⟶
      (∀ xb. (∀ xc≤xb. (inouts_v (Suc (xa + xc)) • [x (Suc (xa + xc))])!3 = 1 ∧
                       (inouts_v (Suc (xa + xc)) • [x (Suc (xa + xc))])!2 = 8) ⟶
          inouts_v''' (Suc (xa + xb)) = [0, 0]))
    using feedback a1 6 2 a3 input-at-3 input-at-2 by simp
  show ok_v' ∧
    (∀ x. length(inouts_v' x) = Suc 0) ∧
    (∀ x. hd (inouts_v' x) = 1 ⟶
        (∀ xa. (∀ xb≤xa. inouts_v (Suc (x + xb))!3 = 1 ∧ inouts_v (Suc (x + xb))!2 = 8) ⟶
            inouts_v' (Suc (x + xa)) = [0]))
    apply (rule conjI)
    using 4 apply (simp)
    apply (rule conjI)
    using 3 a2 apply blast
    apply (rule allI, clarify)
    using a1' by (simp add: 3 5 a2 feedback input-at-2 input-at-3)
 qed
qed
```

Finally, the requirement is held for the *post-landing-finalize-1* because of transitivity of refinement relation.

```
lemma req-02:
  req-02-contract ⊑ post-landing-finalize-1
  apply (simp only: post-landing-finalize-1-simp)
  using req-02-fd-ref req-02-ref by auto
```

C.5.3 Requirement 03

post-landing-finalize-req-03: The finalize event will not occur during flight.

During flight, *ac-on-ground* is false. According to Assumption 4 in the paper: "*door-closed*

must be true if *ac-on-ground* is false.", then *door-closed* is true during flight. Therefore, this requirement can be verified similarly as Requirement 04.

C.5.4 Requirement 04

post-landing-finalize-req-04: The finalize event will not be enabled while the aircraft door is closed.

Requirement 4: assumes

- *door-closed* and *ac-on-ground* are boolean,
- *door-open-time* is within (0, *max-door-open-time*)

then it must guarantee that

- it has four inputs and one output,
- if the door is closed, then the output is always false (0).

abbreviation *req-04-contract* $\equiv$ (($\forall$ *n*::*nat* $\cdot$ (
«($\lambda x\ n.$ (
(*hd*(*x n*) = *0* $\vee$ *hd*(*x n*) = *1*) $\wedge$ (∗ *door-closed is boolean* ∗)
((*x n*)!*1* > *0* $\wedge$ (*x n*)!*1* < *max-door-open-time*) $\wedge$ (∗ *door-open-time* ∗)
((*x n*)!*3* = *0* $\vee$ (*x n*)!*3* = *1*) (∗ *ac-on-ground is boolean* ∗)
))»
(&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
$\vdash_n$
(($\forall$ *n*::*nat* $\cdot$
((#$_u$($inouts («*n*»)$_a$)) =$_u$ «*4*») $\wedge$
((#$_u$($inouts´ («*n*»)$_a$)) =$_u$ «*1*») $\wedge$
((*head*$_u$(($inouts («*n*»)$_a$)) =$_u$ *1*) (∗ *door-closed is true* ∗)
$\Rightarrow$ (*head*$_u$(($inouts´ («*n*»)$_a$)) =$_u$ *0*)))
))

This is the contract for *post-landing-finalize-1* without the last feedback. Since *post-landing-finalize-1* is equal to *plf-rise1shot-simp* f_D (*4*, *1*), then this is the contract for *plf-rise1shot-simp*.

definition *req-04-1-contract* $\equiv$ (($\forall$ *n*::*nat* $\cdot$ (
«($\lambda x\ n.$ (
(*hd*(*x n*) = *0* $\vee$ *hd*(*x n*) = *1*) $\wedge$ (∗ *door-closed is boolean* ∗)
((*x n*)!*1* > *0* $\wedge$ (*x n*)!*1* < *max-door-open-time*) $\wedge$ (∗ *door-open-time* ∗)
((*x n*)!*3* = *0* $\vee$ (*x n*)!*3* = *1*) (∗ *ac-on-ground is boolean* ∗)
))»
(&*inouts*)$_a$ («*n*»)$_a$)::*sim-state upred*)
$\vdash_n$
(($\forall$ *n*::*nat* $\cdot$
((#$_u$($inouts («*n*»)$_a$)) =$_u$ «*5*») $\wedge$
((#$_u$($inouts´ («*n*»)$_a$)) =$_u$ «*2*») $\wedge$
((*head*$_u$(($inouts («*n*»)$_a$)) =$_u$ *1*) (∗ *door-closed is true* ∗)
$\Rightarrow$ (*head*$_u$(($inouts´ («*n*»)$_a$)) =$_u$ *0*) $\wedge$ (*head*$_u$(*tail*$_u$($inouts´ («*n*»)$_a$)) =$_u$ *0*)))
))

lemma *SimBlock-req-04-1-contract*:
SimBlock 5 2 req-04-1-contract

apply (*simp add*: *SimBlock-def req-04-1-contract-def*)
apply (*rel-auto*)
apply (*rule-tac x* = λ*na*. [*0*, *20*, *4*, *0*, *0*] **in** *exI*, *simp*)
by (*rule-tac x* = λ*na*. [*0*, *0*] **in** *exI*, *simp*)

lemma *inps-req-04-1-contract*:
inps req-04-1-contract = *5*
using *SimBlock-req-04-1-contract inps-P* **by** *blast*

lemma *outps-req-04-1-contract*:
outps req-04-1-contract = *2*
using *SimBlock-req-04-1-contract outps-P* **by** *blast*

In order to verify this requirement, firstly to verify the contract *req-04-1-contract* refined by *plf-rise1shot-simp*.

lemma *req-04-ref-plf-rise1shot*: *req-04-1-contract* ⊑ *plf-rise1shot-simp*
apply (*simp add*: *FBlock-def plf-rise1shot-simp-def req-04-1-contract-def*)
apply (*rule ndesign-refine-intro*)
apply *simp*
apply (*unfold upred-defs urel-defs*)
apply (*simp add*: *fun-eq-iff relcomp-unfold OO-def*
lens-defs upred-defs alpha-splits Product-Type.split-beta)*?*
apply (*transfer*)
apply (*simp*; *safe*)
apply (*rename-tac inouts*$_v$ *inouts*$_v$′ *x*)
proof −
fix *inouts*$_v$ *inouts*$_v$′::*nat* ⇒ *real list* **and** *x*::*nat*
assume *a1*: ∀ *x*. (*hd* (*inouts*$_v$ *x*) = *0* ∨ *hd* (*inouts*$_v$ *x*) = *1*) ∧
0 < *inouts*$_v$ *x*!(*Suc 0*) ∧
inouts$_v$ *x*!(*Suc 0*) < *max-door-open-time* ∧
(*inouts*$_v$ *x*!*3* = *0* ∨ *inouts*$_v$ *x*!*3* = *1*)
assume *a2*: ∀ *x*. (*x* ≤ *Suc 0* ⟶
(*hd* (*inouts*$_v$ *0*) = *0* ⟶
(*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*inouts*$_v$ *0*!(*Suc 0*)) *0*⌉)) < *1* ⟶
(*x* = *0* ⟶ *length*(*inouts*$_v$ *0*) = *5* ∧ *length*(*inouts*$_v$′ *0*) = *2* ∧ [*0*, *0*] = *inouts*$_v$′ *0*) ∧
(*0* < *x* ⟶
(*hd* (*inouts*$_v$ *x*) = *0* ⟶
(*real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*inouts*$_v$ *x*!(*Suc 0*)) *0*⌉)))
< *min 1* (*real-of-int* (*int32* (*RoundZero* (*real-of-int* ⌈*Rate* ∗ *max* (*inouts*$_v$ *0*!(*Suc 0*))
0⌉)))) + *1* ⟶
(¬ *latch-rec-calc-output*
(λ*n1*. *if inouts*$_v$ (*n1* − *Suc 0*)!*2* = *4* ⟶ *hd* (*inouts*$_v$ *n1*) = *0* ∨ *n1* = *0* ∨ ¬ *inouts*$_v$
n1!*2* = *8*
then 0 else 1)
(λ*n1*. *if n1* = *0* ∨ ¬ *inouts*$_v$ (*n1* − *Suc 0*)!*3* = *0* ∧ *inouts*$_v$ (*n1* − *Suc 0*)!*4* = *0 then*
0 else 1)
x =
0 ⟶
length(*inouts*$_v$ *x*) = *5* ∧ *length*(*inouts*$_v$′ *x*) = *2* ∧ [*1*, *1*] = *inouts*$_v$′ *x*) ∧
(*latch-rec-calc-output*
(λ*n1*. *if inouts*$_v$ (*n1* − *Suc 0*)!*2* = *4* ⟶ *hd* (*inouts*$_v$ *n1*) = *0* ∨ *n1* = *0* ∨ ¬ *inouts*$_v$
n1!*2* = *8*
then 0 else 1)
(λ*n1*. *if n1* = *0* ∨ ¬ *inouts*$_v$ (*n1* − *Suc 0*)!*3* = *0* ∧ *inouts*$_v$ (*n1* − *Suc 0*)!*4* = *0 then*
0 else 1) *x* =

$$
\begin{array}{l}
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad (\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\qquad < min\ 1\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + 1 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
\quad (\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\qquad x = \\
\qquad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad (\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))) \wedge \\
\quad (\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 1 \longrightarrow \\
\quad (x = 0 \longrightarrow \\
\quad length(inouts_v\ 0) = 5 \wedge \\
\quad length(inouts_v'\ 0) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ 0 \wedge length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
\quad (0 < x \longrightarrow \\
\quad (hd\ (inouts_v\ x) = 0 \longrightarrow
\end{array}
$$

$$
\begin{array}{l}
\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
\quad\ \ < \mathit{min}\ 1\ (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil))))) + 1 \longrightarrow \\
\quad (\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\ \ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\ \ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ x = \\
\quad\ \ 0 \longrightarrow \\
\quad\ \ \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge \\
\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\ \ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\ \ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
\quad\ \ 0 \longrightarrow \\
\quad\ \ \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge \\
\quad (\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
\quad\ \ < \mathit{min}\ 1\ (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil))))) + 1 \longrightarrow \\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \\
\quad \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge \\
\quad [0,\ 0] = \mathit{inouts}_v{}'\ x \wedge \\
\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\ \ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\ \ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
\quad\ \ 0 \longrightarrow \\
\quad\ \ \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))) \wedge \\
\quad (\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow \\
\quad (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad (\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\ \ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\ \ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ x = \\
\quad\ \ 0 \longrightarrow \\
\quad\ \ \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge \\
\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\ \ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\ \ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\ \ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
\quad\ \ 0 \longrightarrow \\
\quad\ \ \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge \\
\quad (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge
\end{array}
$$

$$
\begin{array}{l}
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))))) \wedge \\
\quad (\neg\ hd\ (inouts_v\ 0) = 0 \longrightarrow \\
\quad\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\ (x = 0 \longrightarrow length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
\quad\ (0 < x \longrightarrow \\
\quad\ (hd\ (inouts_v\ x) = 0 \longrightarrow \\
\quad\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\qquad < min\ 0\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + 1 \longrightarrow \\
\quad\ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad\ (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad (\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\qquad < min\ 0\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + 1 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge \\
\quad\ length(inouts_v'\ x) = 2 \wedge \\
\quad\ [0,\ 0] = inouts_v'\ x \wedge \\
\quad\ (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\qquad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad\ 0 \longrightarrow \\
\quad\ length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad (\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
\quad\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\ (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\qquad then\ 0\ else\ 1)
\end{array}
$$

$$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge (\mathit{latch\text{-}rec\text{-}calc\text{-}output}\ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8\ \mathit{then}\ 0\ \mathit{else}\ 1)\ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x \wedge (\mathit{latch\text{-}rec\text{-}calc\text{-}output}\ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8\ \mathit{then}\ 0\ \mathit{else}\ 1)\ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))))) \wedge (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow (x = 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ 0) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ 0) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ 0 \wedge \mathit{length}(\mathit{inouts}_v\ 0) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ 0) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ 0) \wedge (0 < x \longrightarrow (\mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) < \mathit{min}\ 0\ (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil))))) + 1 \longrightarrow (\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output}\ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8\ \mathit{then}\ 0\ \mathit{else}\ 1)\ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge (\mathit{latch\text{-}rec\text{-}calc\text{-}output}\ (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8\ \mathit{then}\ 0\ \mathit{else}\ 1)\ (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = 0 \longrightarrow \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge (\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) < \mathit{min}\ 0\ (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))$$

$0\rceil))))) + 1 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 2 \wedge$
$[0, 0] = inouts_v'\ x \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0, 0] = inouts_v'\ x))) \wedge$
$(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow$
$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow$
$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)$
$x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1, 1] = inouts_v'\ x) \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0, 0] = inouts_v'\ x)) \wedge$
$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 2 \wedge$
$[0, 0] = inouts_v'\ x \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0, 0] = inouts_v'\ x)))))))) \wedge$
$(\neg\ x \leq Suc\ 0 \longrightarrow$
$(hd\ (inouts_v\ (x - Suc\ 0)) = 0 \longrightarrow$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))$
$< min\ (vT\text{-}fd\text{-}sol\text{-}1$
$(\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil))))$
$(\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ (Suc\ 0)))$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ (Suc\ 0))!(Suc\ 0))\ 0\rceil)))) +$
$1 \longrightarrow$
$(hd\ (inouts_v\ x) = 0 \longrightarrow$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))$

$$
\begin{array}{l}
< min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\quad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil))))\\
\quad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))\\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \wedge \\
latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
(x - Suc\ 0) = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 1] = inouts_v{}'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\quad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v{}'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v{}'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8
\end{array}
$$

then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0
else 1) x =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$′ x) = 2 ∧ [0, 0] = $inouts_v$′ x) ∧
(¬ latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$
n1!2 = 8
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then
0 else 1)
(x − Suc 0) =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$′ x) = 2 ∧ [0, 0] = $inouts_v$′ x))) ∧
(¬ hd ($inouts_v$ x) = 0 ⟶
(int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ x!(Suc 0)) 0⌉)) < 0 ⟶
(¬ latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$
n1!2 = 8
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then
0 else 1)
x =
0 ∧
latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$
n1!2 = 8
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0
else 1)
(x − Suc 0) =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$′ x) = 2 ∧ [1, 1] = $inouts_v$′ x) ∧
(latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$
n1!2 = 8
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0
else 1) x =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$′ x) = 2 ∧ [0, 0] = $inouts_v$′ x) ∧
(¬ latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$
n1!2 = 8
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then
0 else 1)
(x − Suc 0) =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$′ x) = 2 ∧ [0, 0] = $inouts_v$′ x)) ∧
(¬ int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ x!(Suc 0)) 0⌉)) < 0 ⟶
length($inouts_v$ x) = 5 ∧
length($inouts_v$′ x) = 2 ∧
[0, 0] = $inouts_v$′ x ∧
(latch-rec-calc-output

$$
\begin{array}{l}
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v'\ x) \wedge \\
(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
(x - \mathit{Suc}\ 0) = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v'\ x)))) \wedge \\
(\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil))) \\
< \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1} \\
(\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil))))) \\
(\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ (\mathit{Suc}\ 0))) \\
(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ (\mathit{Suc}\ 0)))!(\mathit{Suc}\ 0))\ 0\rceil))))) + \\
1 \longrightarrow \\
(\mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow \\
(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
< \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1} \\
(\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil))))) \\
(\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0)) \\
(\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil))))) + \\
1 \longrightarrow \\
(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
x = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v'\ x) \wedge \\
(\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v'\ x)) \wedge \\
(\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
< \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1} \\
(\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil)))))
\end{array}
$$

$$
\begin{array}{l}
\quad (\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0))\\
\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\\
0))\ 0\rceil))))\ +\\
\quad 1 \longrightarrow\\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge\\
\quad \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge\\
\quad [0,\ 0] = \mathit{inouts}_v{}'\ x \wedge\\
\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output}\\
\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\\
n1!2 = 8\\
\quad \mathit{then}\ 0\ \mathit{else}\ 1)\\
\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\\
\mathit{else}\ 1)\ x =\\
\quad 0 \longrightarrow\\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))) \wedge\\
\quad (\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow\\
\quad (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow\\
\quad (\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output}\\
\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\\
n1!2 = 8\\
\quad \mathit{then}\ 0\ \mathit{else}\ 1)\\
\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\\
0\ \mathit{else}\ 1)\\
\quad x =\\
\quad 0 \longrightarrow\\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge\\
\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output}\\
\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\\
n1!2 = 8\\
\quad \mathit{then}\ 0\ \mathit{else}\ 1)\\
\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\\
\mathit{else}\ 1)\ x =\\
\quad 0 \longrightarrow\\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge\\
\quad (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow\\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge\\
\quad \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge\\
\quad [0,\ 0] = \mathit{inouts}_v{}'\ x \wedge\\
\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output}\\
\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\\
n1!2 = 8\\
\quad \mathit{then}\ 0\ \mathit{else}\ 1)\\
\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\\
\mathit{else}\ 1)\ x =\\
\quad 0 \longrightarrow\\
\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))))) \wedge\\
\quad (\neg\ \mathit{hd}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)) = 0 \longrightarrow\\
\quad (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow\\
\quad (\mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow\\
\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)))\\
\quad < \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1}\\
\quad (\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\\
0\rceil))))\\
\quad (\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0))\\
\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))
\end{array}
$$

$0\rceil))))) +$
$1 \longrightarrow$
$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v$
$n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then$
$0\ else\ 1)$
$x =$
$0 \wedge$
$latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v$
$n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0$
$else\ 1)$
$(x - Suc\ 0) =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v$
$n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0$
$else\ 1)\ x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge$
$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v$
$n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then$
$0\ else\ 1)$
$(x - Suc\ 0) =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge$
$(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))$
$< min\ (vT\text{-}fd\text{-}sol\text{-}1$
$(\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc$
$0))\ 0\rceil))))$
$(\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))$
$(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc$
$0))\ 0\rceil))))) +$
$1 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge$
$length(inouts_v'\ x) = 2 \wedge$
$[0,\ 0] = inouts_v'\ x \wedge$
$(latch\text{-}rec\text{-}calc\text{-}output$
$(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v$
$n1!2 = 8$
$then\ 0\ else\ 1)$
$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0$
$else\ 1)\ x =$
$0 \longrightarrow$
$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge$

$$
\begin{array}{l}
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0, 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \wedge \\
latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1, 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0, 0] = inouts_v'\ x) \wedge \\
\quad (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\qquad (x - Suc\ 0) = \\
\qquad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0, 0] = inouts_v'\ x)) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0, 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =
\end{array}
$$

$$
\begin{array}{l}
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
\quad (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
< min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil))))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\quad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\qquad 1 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =
\end{array}
$$

```
            0 ⟶
            length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
          (¬ hd (inouts_v x) = 0 ⟶
           (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
           (¬ latch-rec-calc-output
              (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!2 = 8
                    then 0 else 1)
              (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then
0 else 1)
               x =
              0 ⟶
            length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
           (latch-rec-calc-output
              (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!2 = 8
                    then 0 else 1)
             (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
else 1) x =
            0 ⟶
            length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
          (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
           length(inouts_v x) = 5 ∧
           length(inouts_v' x) = 2 ∧
           [0, 0] = inouts_v' x ∧
           (latch-rec-calc-output
              (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!2 = 8
                    then 0 else 1)
             (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
else 1) x =
            0 ⟶
            length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))))))
  assume a3: hd (inouts_v x) = 1
  have 1: ∀x. (inouts_v x!(Suc 0)) > 0 ∧ (inouts_v x!(Suc 0)) < max-door-open-time
    using a1 by blast
  have 2: ∀x. int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) ≥ 0 ∧
     int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < (Rate * max-door-open-time
+ 1)
    apply (rule allI)
    proof −
     fix xx::nat
     have 0: Rate * max (inouts_v xx!(Suc 0)) 0 < Rate * max-door-open-time ∧ Rate * max x 0 ≥ 0
       using 1 by simp
     have 1: ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max (inouts_v xx!(Suc 0)) 0 + 1)
       using ceiling-correct by linarith
     then have ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max-door-open-time + 1)
       using 0 1 by linarith
     then have 2: ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max-door-open-time + 1) ∧
           ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ ≥ 0
       using 0 by (smt ceiling-le-zero ceiling-zero)
     have 3: real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max-door-open-time + 1) ∧
           real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ ≥ 0
       using 2 by (simp)
     have 4: RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉)
```

$= \lfloor$*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil\rfloor$
using *RoundZero-def* **by** (*simp*)
have *5*: *RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$) $<$ (*Rate* $*$ *max-door-open-time* $+$ *1*) $\wedge$
RoundZero (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$) $\geq$ *0*
using *3 4* **by** *auto*
have *51*: *RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$) $<$ (*Rate* $*$ *214748364* $+$ *1*) $\wedge$
RoundZero (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$) $\geq$ *0*
using *5 1* **by** *auto*
have *6*: *int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$))
$=$ *RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$)
using *51 int32-eq 1* **by** *simp*
have *7*: *int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$))
$<$ (*Rate* $*$ *max-door-open-time* $+$ *1*) $\wedge$
int32 (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$)) $\geq$ *0*
using *5 6* **by** (*simp*)
show *0* $\leq$ *int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$)) $\wedge$
int32 (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *xx*!(*Suc 0*)) *0*$\rceil$)) $<$ *Rate* $*$ *max-door-open-time* $+$ *1*
using *7* **by** *blast*
qed
show *hd* (*inouts*$_v$′ *x*) $=$ *0*
using *2 a2 a3 a1 neq0-conv list.sel*(*1*) **by** (*smt*)
next
fix *inouts*$_v$ *inouts*$_v$′::*nat* $\Rightarrow$ *real list* **and** *x*::*nat*
assume *a1*: $\forall$ *x*. (*hd* (*inouts*$_v$ *x*) $=$ *0* $\vee$ *hd* (*inouts*$_v$ *x*) $=$ *1*) $\wedge$
0 $<$ *inouts*$_v$ *x*!(*Suc 0*) $\wedge$
inouts$_v$ *x*!(*Suc 0*) $<$ *max-door-open-time* $\wedge$
(*inouts*$_v$ *x*!*3* $=$ *0* $\vee$ *inouts*$_v$ *x*!*3* $=$ *1*)
assume *a2*: $\forall$ *x*. (*x* $\leq$ *Suc 0* $\longrightarrow$
(*hd* (*inouts*$_v$ *0*) $=$ *0* $\longrightarrow$
(*int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *0*!(*Suc 0*)) *0*$\rceil$)) $<$ *1* $\longrightarrow$
(*x* $=$ *0* $\longrightarrow$ *length*(*inouts*$_v$ *0*) $=$ *5* $\wedge$ *length*(*inouts*$_v$′ *0*) $=$ *2* $\wedge$ [*0*, *0*] $=$ *inouts*$_v$′ *0*) $\wedge$
(*0* $<$ *x* $\longrightarrow$
(*hd* (*inouts*$_v$ *x*) $=$ *0* $\longrightarrow$
(*real-of-int* (*int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *x*!(*Suc 0*)) *0*$\rceil$)))
$<$ *min 1* (*real-of-int* (*int32* (*RoundZero* (*real-of-int* $\lceil$*Rate* $*$ *max* (*inouts*$_v$ *0*!(*Suc 0*)) *0*$\rceil$)))) $+$ *1* $\longrightarrow$
(¬ *latch-rec-calc-output*
(λ*n1*. *if inouts*$_v$ (*n1* $-$ *Suc 0*)!*2* $=$ *4* $\longrightarrow$ *hd* (*inouts*$_v$ *n1*) $=$ *0* $\vee$ *n1* $=$ *0* $\vee$ ¬ *inouts*$_v$ *n1*!*2* $=$ *8*
then 0 else 1)
(λ*n1*. *if n1* $=$ *0* $\vee$ ¬ *inouts*$_v$ (*n1* $-$ *Suc 0*)!*3* $=$ *0* $\wedge$ *inouts*$_v$ (*n1* $-$ *Suc 0*)!*4* $=$ *0 then 0 else 1*)
x $=$
0 $\longrightarrow$
length(*inouts*$_v$ *x*) $=$ *5* $\wedge$ *length*(*inouts*$_v$′ *x*) $=$ *2* $\wedge$ [*1*, *1*] $=$ *inouts*$_v$′ *x*) $\wedge$
(*latch-rec-calc-output*
(λ*n1*. *if inouts*$_v$ (*n1* $-$ *Suc 0*)!*2* $=$ *4* $\longrightarrow$ *hd* (*inouts*$_v$ *n1*) $=$ *0* $\vee$ *n1* $=$ *0* $\vee$ ¬ *inouts*$_v$ *n1*!*2* $=$ *8*
then 0 else 1)
(λ*n1*. *if n1* $=$ *0* $\vee$ ¬ *inouts*$_v$ (*n1* $-$ *Suc 0*)!*3* $=$ *0* $\wedge$ *inouts*$_v$ (*n1* $-$ *Suc 0*)!*4* $=$ *0 then 0 else 1*) *x* $=$
0 $\longrightarrow$

$$
\begin{array}{l}
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ 1\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))) + 1 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) < 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))) < 1 \longrightarrow \\
(x = 0 \longrightarrow \\
length(inouts_v\ 0) = 5 \wedge \\
length(inouts_v'\ 0) = 2 \wedge \\
[0,\ 0] = inouts_v'\ 0 \wedge length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0) \wedge \\
(0 < x \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))
\end{array}
$$

$$< min\ 1\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))\ +\ 1\ \longrightarrow$$
$$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$$
$$(\lambda n1.\ if\ inouts_v\ (n1\ -\ Suc\ 0)!2 = 4\ \longrightarrow\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$$
$$then\ 0\ else\ 1)$$
$$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1\ -\ Suc\ 0)!3 = 0 \wedge inouts_v\ (n1\ -\ Suc\ 0)!4 = 0\ then\ 0\ else\ 1)$$
$$x =$$
$$0\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge$$
$$(latch\text{-}rec\text{-}calc\text{-}output$$
$$(\lambda n1.\ if\ inouts_v\ (n1\ -\ Suc\ 0)!2 = 4\ \longrightarrow\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$$
$$then\ 0\ else\ 1)$$
$$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1\ -\ Suc\ 0)!3 = 0 \wedge inouts_v\ (n1\ -\ Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =$$
$$0\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge$$
$$(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))$$
$$< min\ 1\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil))))\ +\ 1\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge$$
$$length(inouts_v'\ x) = 2 \wedge$$
$$[0,\ 0] = inouts_v'\ x \wedge$$
$$(latch\text{-}rec\text{-}calc\text{-}output$$
$$(\lambda n1.\ if\ inouts_v\ (n1\ -\ Suc\ 0)!2 = 4\ \longrightarrow\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$$
$$then\ 0\ else\ 1)$$
$$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1\ -\ Suc\ 0)!3 = 0 \wedge inouts_v\ (n1\ -\ Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =$$
$$0\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge$$
$$(\neg\ hd\ (inouts_v\ x) = 0\ \longrightarrow$$
$$(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0\ \longrightarrow$$
$$(\neg\ latch\text{-}rec\text{-}calc\text{-}output$$
$$(\lambda n1.\ if\ inouts_v\ (n1\ -\ Suc\ 0)!2 = 4\ \longrightarrow\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$$
$$then\ 0\ else\ 1)$$
$$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1\ -\ Suc\ 0)!3 = 0 \wedge inouts_v\ (n1\ -\ Suc\ 0)!4 = 0\ then\ 0\ else\ 1)$$
$$x =$$
$$0\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge$$
$$(latch\text{-}rec\text{-}calc\text{-}output$$
$$(\lambda n1.\ if\ inouts_v\ (n1\ -\ Suc\ 0)!2 = 4\ \longrightarrow\ hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8$$
$$then\ 0\ else\ 1)$$
$$(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1\ -\ Suc\ 0)!3 = 0 \wedge inouts_v\ (n1\ -\ Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =$$
$$0\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge$$
$$(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0\ \longrightarrow$$
$$length(inouts_v\ x) = 5 \wedge$$
$$length(inouts_v'\ x) = 2 \wedge$$

$$
\begin{array}{l}
[0,\ 0] = inouts_v'\ x\ \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))))\ \wedge \\
(\neg\ hd\ (inouts_v\ 0) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(x = 0 \longrightarrow length(inouts_v\ 0) = 5 \wedge length(inouts_v'\ 0) = 2 \wedge [0,\ 0] = inouts_v'\ 0)\ \wedge \\
(0 < x \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ 0\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))))\ +\ 1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x)\ \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))\ \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ 0\ (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ 0!(Suc\ 0))\ 0\rceil)))))\ +\ 1 \longrightarrow \\
length(inouts_v\ x) = 5\ \wedge \\
length(inouts_v'\ x) = 2\ \wedge \\
[0,\ 0] = inouts_v'\ x\ \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))\ \wedge \\
(\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
(int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then
\end{array}
$$

$$
\begin{array}{l}
0\ \mathit{else}\ 1) \\
\qquad\qquad x = \\
\qquad\qquad 0 \longrightarrow \\
\qquad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge \\
\qquad\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\qquad\qquad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v \\
n1!2 = 8 \\
\qquad\qquad\qquad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\qquad\qquad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then} \\
0\ \mathit{else}\ 1)\ x = \\
\qquad\qquad 0 \longrightarrow \\
\qquad\qquad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge \\
\qquad\quad (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\qquad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \\
\qquad\quad \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge \\
\qquad\quad [0,\ 0] = \mathit{inouts}_v{}'\ x \wedge \\
\qquad\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\qquad\qquad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v \\
n1!2 = 8 \\
\qquad\qquad\qquad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\qquad\qquad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then} \\
0\ \mathit{else}\ 1)\ x = \\
\qquad\qquad 0 \longrightarrow \\
\qquad\qquad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))))) \wedge \\
\qquad\quad (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\qquad\quad (x = 0 \longrightarrow \\
\qquad\quad \mathit{length}(\mathit{inouts}_v\ 0) = 5 \wedge \\
\qquad\quad \mathit{length}(\mathit{inouts}_v{}'\ 0) = 2 \wedge \\
\qquad\quad [0,\ 0] = \mathit{inouts}_v{}'\ 0 \wedge \mathit{length}(\mathit{inouts}_v\ 0) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ 0) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}' \\
0) \wedge \\
\qquad\quad (0 < x \longrightarrow \\
\qquad\quad (\mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow \\
\qquad\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
\qquad\qquad < \mathit{min}\ 0\ (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0)) \\
0\rceil))))) + 1 \longrightarrow \\
\qquad\quad (\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\qquad\qquad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v \\
n1!2 = 8 \\
\qquad\qquad\qquad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\qquad\qquad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then} \\
0\ \mathit{else}\ 1) \\
\qquad\qquad\qquad x = \\
\qquad\qquad\qquad 0 \longrightarrow \\
\qquad\qquad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge \\
\qquad\qquad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\qquad\qquad\qquad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v \\
n1!2 = 8 \\
\qquad\qquad\qquad\qquad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\qquad\qquad\qquad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then} \\
0\ \mathit{else}\ 1)\ x = \\
\qquad\qquad\qquad 0 \longrightarrow \\
\qquad\qquad\qquad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge \\
\qquad\qquad\quad (\neg\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
\qquad\qquad\qquad < \mathit{min}\ 0\ (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ 0!(\mathit{Suc}\ 0)) \\
0\rceil))))) + 1 \longrightarrow
\end{array}
$$

$$
\begin{array}{l}
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))) \wedge \\
\quad (\neg\ hd\ (inouts_v\ x) = 0 \longrightarrow \\
\quad (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
\quad (\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge \\
\quad length(inouts_v'\ x) = 2 \wedge \\
\quad [0,\ 0] = inouts_v'\ x \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\quad\ (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\quad\quad then\ 0\ else\ 1) \\
\quad\ (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x))))))) \wedge \\
\quad (\neg\ x \leq Suc\ 0 \longrightarrow \\
\quad (hd\ (inouts_v\ (x - Suc\ 0)) = 0 \longrightarrow \\
\quad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\quad\quad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\quad\ (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ (Suc\ 0))) \\
\quad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ (Suc\ 0))!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
\quad (hd\ (inouts_v\ x) = 0 \longrightarrow \\
\quad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1
\end{array}
$$

$$
\begin{array}{l}
\quad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil))))\\
\quad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))\\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) +\\
1 \longrightarrow\\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output\\
(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8\\
\quad then\ 0\ else\ 1)\\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\\
x =\\
0 \wedge\\
latch\text{-}rec\text{-}calc\text{-}output\\
(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8\\
\quad then\ 0\ else\ 1)\\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\\
(x - Suc\ 0) =\\
0 \longrightarrow\\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge\\
(latch\text{-}rec\text{-}calc\text{-}output\\
(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8\\
\quad then\ 0\ else\ 1)\\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x =\\
0 \longrightarrow\\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge\\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output\\
(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8\\
\quad then\ 0\ else\ 1)\\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\\
(x - Suc\ 0) =\\
0 \longrightarrow\\
length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge\\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil)))\\
< min\ (vT\text{-}fd\text{-}sol\text{-}1\\
\quad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil))))\\
\quad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0))\\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) +\\
1 \longrightarrow\\
length(inouts_v\ x) = 5 \wedge\\
length(inouts_v'\ x) = 2 \wedge\\
[0,\ 0] = inouts_v'\ x \wedge\\
(latch\text{-}rec\text{-}calc\text{-}output\\
(\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8\\
\quad then\ 0\ else\ 1)
\end{array}
$$

$$
\begin{array}{l}
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x) \wedge \\
(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
(x - \mathit{Suc}\ 0) = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x))) \wedge \\
(\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow \\
(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
x = \\
0 \wedge \\
\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
(x - \mathit{Suc}\ 0) = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1,\ 1] = \mathit{inouts}_v{}'\ x) \wedge \\
(\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x) \wedge \\
(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
(x - \mathit{Suc}\ 0) = \\
0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0,\ 0] = \mathit{inouts}_v{}'\ x)) \wedge \\
(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \\
\mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge \\
[0,\ 0] = \mathit{inouts}_v{}'\ x \wedge \\
(\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v
\end{array}
$$

$n1!2 = 8$
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0 else 1) x =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$' x) = 2 ∧ [0, 0] = $inouts_v$' x) ∧
(¬ latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$ $n1!2 = 8$
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0 else 1)
(x − Suc 0) =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$' x) = 2 ∧ [0, 0] = $inouts_v$' x)))) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ (x − Suc 0)!(Suc 0)) 0⌉)))
< min (vT-fd-sol-1
(λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ n1!(Suc 0)) 0⌉))))
(λn1. if hd ($inouts_v$ n1) = 0 then 1 else 0) (x − Suc (Suc 0)))
(real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ (x − Suc (Suc 0))!(Suc 0)) 0⌉)))) +
1 ⟶
(hd ($inouts_v$ x) = 0 ⟶
(real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ x!(Suc 0)) 0⌉)))
< min (vT-fd-sol-1
(λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ n1!(Suc 0)) 0⌉))))
(λn1. if hd ($inouts_v$ n1) = 0 then 1 else 0) (x − Suc 0))
(real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ (x − Suc 0)!(Suc 0)) 0⌉)))) +
1 ⟶
(¬ latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$ $n1!2 = 8$
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0 else 1)
x =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$' x) = 2 ∧ [1, 1] = $inouts_v$' x) ∧
(latch-rec-calc-output
(λn1. if $inouts_v$ (n1 − Suc 0)!2 = 4 ⟶ hd ($inouts_v$ n1) = 0 ∨ n1 = 0 ∨ ¬ $inouts_v$ $n1!2 = 8$
then 0 else 1)
(λn1. if n1 = 0 ∨ ¬ $inouts_v$ (n1 − Suc 0)!3 = 0 ∧ $inouts_v$ (n1 − Suc 0)!4 = 0 then 0 else 1) x =
0 ⟶
length($inouts_v$ x) = 5 ∧ length($inouts_v$' x) = 2 ∧ [0, 0] = $inouts_v$' x)) ∧
(¬ real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ x!(Suc 0)) 0⌉)))
< min (vT-fd-sol-1
(λn1. real-of-int (int32 (RoundZero (real-of-int ⌈Rate ∗ max ($inouts_v$ n1!(Suc 0)) 0⌉))))
(λn1. if hd ($inouts_v$ n1) = 0 then 1 else 0) (x − Suc 0))

$$
\begin{array}{l}
\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil))))) + \\
\quad\quad 1 \longrightarrow \\
\quad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \\
\quad\quad \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge \\
\quad\quad [0, 0] = \mathit{inouts}_v{}'\ x \wedge \\
\quad\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\quad\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\quad\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\quad\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
\quad\quad\quad 0 \longrightarrow \\
\quad\quad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0, 0] = \mathit{inouts}_v{}'\ x))) \wedge \\
\quad\quad (\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow \\
\quad\quad\quad (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\quad\quad (\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\quad\quad\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\quad\quad\quad x = \\
\quad\quad\quad\quad 0 \longrightarrow \\
\quad\quad\quad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1, 1] = \mathit{inouts}_v{}'\ x) \wedge \\
\quad\quad\quad\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\quad\quad\quad\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
\quad\quad\quad\quad\quad 0 \longrightarrow \\
\quad\quad\quad\quad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0, 0] = \mathit{inouts}_v{}'\ x)) \wedge \\
\quad\quad\quad\quad (\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\quad\quad\quad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \\
\quad\quad\quad\quad\quad \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge \\
\quad\quad\quad\quad\quad [0, 0] = \mathit{inouts}_v{}'\ x \wedge \\
\quad\quad\quad\quad\quad (\mathit{latch\text{-}rec\text{-}calc\text{-}output} \\
\quad\quad\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8 \\
\quad\quad\quad\quad\quad\quad\quad \mathit{then}\ 0\ \mathit{else}\ 1) \\
\quad\quad\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x = \\
\quad\quad\quad\quad\quad\quad 0 \longrightarrow \\
\quad\quad\quad\quad\quad\quad \mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0, 0] = \mathit{inouts}_v{}'\ x))))) \wedge \\
\quad\quad\quad\quad (\neg\ \mathit{hd}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)) = 0 \longrightarrow \\
\quad\quad\quad\quad\quad (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow \\
\quad\quad\quad\quad\quad\quad (\mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow \\
\quad\quad\quad\quad\quad\quad\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil))) \\
\quad\quad\quad\quad\quad\quad\quad < \mathit{min}\ (\mathit{vT\text{-}fd\text{-}sol\text{-}1} \\
\quad\quad\quad\quad\quad\quad\quad\quad\quad (\lambda n1.\ \mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ n1!(\mathit{Suc}\ 0))\ 0\rceil)))) \\
\quad\quad\quad\quad\quad\quad\quad\quad\quad (\lambda n1.\ \mathit{if}\ \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0\ \mathit{then}\ 1\ \mathit{else}\ 0)\ (x - \mathit{Suc}\ 0)) \\
\quad\quad\quad\quad\quad\quad\quad (\mathit{real\text{-}of\text{-}int}\ (\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ (x - \mathit{Suc}\ 0)!(\mathit{Suc}\ 0))\ 0\rceil)))) +
\end{array}
$$

$$
\begin{array}{l}
\quad 1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad x = \\
\quad 0 \wedge \\
latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [1,\ 1] = inouts_v{}'\ x) \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
\quad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\quad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\quad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)))) + \\
\quad 1 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v{}'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v{}'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\quad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad then\ 0\ else\ 1) \\
(\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
0 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge length(inouts_v{}'\ x) = 2 \wedge [0,\ 0] = inouts_v{}'\ x) \wedge \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output
\end{array}
$$

$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\quad \mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)$
$(x - \mathit{Suc}\ 0) =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0, 0] = \mathit{inouts}_v{}'\ x))) \wedge$
$(\neg\ \mathit{hd}\ (\mathit{inouts}_v\ x) = 0 \longrightarrow$
$(\mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\quad \mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)$
$x =$
$0 \wedge$
$\mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\quad \mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)$
$(x - \mathit{Suc}\ 0) =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [1, 1] = \mathit{inouts}_v{}'\ x) \wedge$
$(\mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\quad \mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0, 0] = \mathit{inouts}_v{}'\ x) \wedge$
$(\neg\ \mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\quad \mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)$
$(x - \mathit{Suc}\ 0) =$
$0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge \mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge [0, 0] = \mathit{inouts}_v{}'\ x)) \wedge$
$(\neg\ \mathit{int32}\ (\mathit{RoundZero}\ (\mathit{real\text{-}of\text{-}int}\ \lceil \mathit{Rate} * \mathit{max}\ (\mathit{inouts}_v\ x!(\mathit{Suc}\ 0))\ 0\rceil)) < 0 \longrightarrow$
$\mathit{length}(\mathit{inouts}_v\ x) = 5 \wedge$
$\mathit{length}(\mathit{inouts}_v{}'\ x) = 2 \wedge$
$[0, 0] = \mathit{inouts}_v{}'\ x \wedge$
$(\mathit{latch\text{-}rec\text{-}calc\text{-}output}$
$(\lambda n1.\ \mathit{if}\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!2 = 4 \longrightarrow \mathit{hd}\ (\mathit{inouts}_v\ n1) = 0 \vee n1 = 0 \vee \neg\ \mathit{inouts}_v\ n1!2 = 8$
$\quad \mathit{then}\ 0\ \mathit{else}\ 1)$
$(\lambda n1.\ \mathit{if}\ n1 = 0 \vee \neg\ \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!3 = 0 \wedge \mathit{inouts}_v\ (n1 - \mathit{Suc}\ 0)!4 = 0\ \mathit{then}\ 0\ \mathit{else}\ 1)\ x =$
$0 \longrightarrow$

$$
\begin{array}{l}
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x) \wedge \\
\quad (\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad\ (x - Suc\ 0) = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)))) \wedge \\
(\neg\ int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil)) < 0 \longrightarrow \\
(hd\ (inouts_v\ x) = 0 \longrightarrow \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
< min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil))))) \\
\qquad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
(real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil))) + \\
1 \longrightarrow \\
(\neg\ latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1) \\
\quad\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [1,\ 1] = inouts_v'\ x) \wedge \\
\quad (latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow \\
\quad length(inouts_v\ x) = 5 \wedge length(inouts_v'\ x) = 2 \wedge [0,\ 0] = inouts_v'\ x)) \wedge \\
(\neg\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ x!(Suc\ 0))\ 0\rceil))) \\
\qquad < min\ (vT\text{-}fd\text{-}sol\text{-}1 \\
\qquad\quad (\lambda n1.\ real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ n1!(Suc\ 0))\ 0\rceil)))) \\
\qquad\quad (\lambda n1.\ if\ hd\ (inouts_v\ n1) = 0\ then\ 1\ else\ 0)\ (x - Suc\ 0)) \\
\qquad (real\text{-}of\text{-}int\ (int32\ (RoundZero\ (real\text{-}of\text{-}int\ \lceil Rate * max\ (inouts_v\ (x - Suc\ 0)!(Suc\ 0))\ 0\rceil))) + \\
\quad\ 1 \longrightarrow \\
length(inouts_v\ x) = 5 \wedge \\
length(inouts_v'\ x) = 2 \wedge \\
[0,\ 0] = inouts_v'\ x \wedge \\
(latch\text{-}rec\text{-}calc\text{-}output \\
\qquad (\lambda n1.\ if\ inouts_v\ (n1 - Suc\ 0)!2 = 4 \longrightarrow hd\ (inouts_v\ n1) = 0 \vee n1 = 0 \vee \neg\ inouts_v\ n1!2 = 8 \\
\qquad\quad then\ 0\ else\ 1) \\
\qquad (\lambda n1.\ if\ n1 = 0 \vee \neg\ inouts_v\ (n1 - Suc\ 0)!3 = 0 \wedge inouts_v\ (n1 - Suc\ 0)!4 = 0\ then\ 0\ else\ 1)\ x = \\
\quad 0 \longrightarrow
\end{array}
$$

```
      length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))) ∧
     (¬ hd (inouts_v x) = 0 ⟶
      (int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
       (¬ latch-rec-calc-output
          (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!2 = 8
                then 0 else 1)
          (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then
0 else 1)
           x =
          0 ⟶
        length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [1, 1] = inouts_v' x) ∧
       (latch-rec-calc-output
          (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!2 = 8
                then 0 else 1)
          (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
else 1) x =
          0 ⟶
        length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x)) ∧
     (¬ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < 0 ⟶
      length(inouts_v x) = 5 ∧
      length(inouts_v' x) = 2 ∧
      [0, 0] = inouts_v' x ∧
      (latch-rec-calc-output
          (λn1. if inouts_v (n1 − Suc 0)!2 = 4 ⟶ hd (inouts_v n1) = 0 ∨ n1 = 0 ∨ ¬ inouts_v
n1!2 = 8
                then 0 else 1)
          (λn1. if n1 = 0 ∨ ¬ inouts_v (n1 − Suc 0)!3 = 0 ∧ inouts_v (n1 − Suc 0)!4 = 0 then 0
else 1) x =
          0 ⟶
        length(inouts_v x) = 5 ∧ length(inouts_v' x) = 2 ∧ [0, 0] = inouts_v' x))))))
  assume a3: hd (inouts_v x) = 1
  have 1: ∀x. (inouts_v x!(Suc 0)) > 0 ∧ (inouts_v x!(Suc 0)) < max-door-open-time
    using a1 by blast
  have 2: ∀x. int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) ≥ 0 ∧
     int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v x!(Suc 0)) 0⌉)) < (Rate * max-door-open-time
+ 1)
    apply (rule allI)
    proof −
     fix xx::nat
     have 0: Rate * max (inouts_v xx!(Suc 0)) 0 < Rate * max-door-open-time ∧ Rate * max x 0 ≥ 0
       using 1 by simp
     have 1: ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max (inouts_v xx!(Suc 0)) 0 + 1)
       using ceiling-correct by linarith
     then have ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max-door-open-time + 1)
       using 0 1 by linarith
     then have 2: ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max-door-open-time + 1) ∧
           ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ ≥ 0
       using 0 by (smt ceiling-le-zero ceiling-zero)
     have 3: real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ < (Rate * max-door-open-time + 1) ∧
           real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉ ≥ 0
       using 2 by (simp)
     have 4: RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉)
               = ⌊real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉⌋
```

```
    using RoundZero-def by (simp)
  have 5: RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉) < (Rate * max-door-open-time
+ 1) ∧
          RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉) ≥ 0
    using 3 4 by auto
  have 51: RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉) < (Rate * 214748364 +
1) ∧
          RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉) ≥ 0
    using 5 1 by auto
  have 6: int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉))
     = RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉)
    using 51 int32-eq 1 by simp
  have 7: int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉))
            < (Rate * max-door-open-time + 1) ∧
          int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉)) ≥ 0
    using 5 6 by (simp)
  show 0 ≤ int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉)) ∧
 int32 (RoundZero (real-of-int ⌈Rate * max (inouts_v xx!(Suc 0)) 0⌉)) < Rate * max-door-open-time
+ 1
    using 7 by blast
 qed
show hd (tl (inouts_v' x)) = 0
 using 2 a2 a3 a1 neq0-conv list.sel(1) list.sel(3) by (smt)
qed
```

Secondly to verify the refinement relation for the feedback.

```
lemma req-04-ref: req-04-1-contract f_D (4, 1) ⊑ plf-rise1shot-simp f_D (4, 1)
 apply (rule feedback-mono[of 5 2])
 using SimBlock-req-04-1-contract apply (blast)
 using post-landing-finalize-1-simblock apply (blast)
 using req-04-ref-plf-rise1shot apply (blast)
 by (auto)
```

Thirdly to verify the requirement contract satisfied by the feedback of *req-04-1-contract*.

```
lemma req-04-fd-ref:
 req-04-contract ⊑ req-04-1-contract f_D (4, 1)
 using inps-req-04-1-contract outps-req-04-1-contract apply (simp add: PreFD-def PostFD-def)
 proof −
  show (∀ n · «λx n. (hd (x n) = 0 ∨ hd (x n) = 1) ∧
            0 < x n!(Suc 0) ∧
            x n!(Suc 0) < max-door-open-time ∧
            (x n!3 = 0 ∨ x n!3 = 1)»(&inouts)_a(«n»)_a) ⊢_n
      (∀ n · #_u($inouts(«n»)_a) =_u «4» ∧
         #_u($inouts´(«n»)_a) =_u «Suc 0» ∧ (head_u($inouts(«n»)_a) =_u 1 ⇒ head_u($inouts´(«n»)_a)
=_u 0))
     ⊑
      (∃ x · (true ⊢_n
        (∀ n · #_u($inouts(«n»)_a) =_u «4» ∧
           #_u($inouts´(«n»)_a) =_u «5» ∧ $inouts´(«n»)_a =_u «f-PreFD x 4»($inouts)_a(«n»)_a))
; ;
       req-04-1-contract ; ;
       (true ⊢_n
        (∀ n · #_u($inouts(«n»)_a) =_u «2» ∧
           #_u($inouts´(«n»)_a) =_u «Suc 0» ∧
           $inouts´(«n»)_a =_u «f-PostFD (Suc 0)»($inouts)_a(«n»)_a ∧
```

$\ll uapply\gg(\$inouts(\ll n\gg)_a)_a(\ll Suc\ 0\gg)_a =_u \ll x\ n\gg)))$
apply (*simp* (*no-asm*) *add*: *req-04-1-contract-def*)

apply (*rel-simp*)
apply (*simp add*: *f-PostFD-def f-PreFD-def*)
proof −
fix ok_v::*bool* **and** $inouts_v$::*nat*⇒*real list* **and**
ok_v'::*bool* **and** $inouts_v'$::*nat*⇒*real list* **and** *x*::*nat*⇒*real* **and**
ok_v''::*bool* **and** $inouts_v''$::*nat*⇒*real list* **and** ok_v'''::*bool* **and**
$inouts_v'''$::*nat*⇒*real list*
assume *a1*: (∀ *xa*. (*hd* ($inouts_v$ *xa* • [*x xa*]) = *0* ∨ *hd* ($inouts_v$ *xa* • [*x xa*]) = *1*) ∧
0 < ($inouts_v$ *xa* • [*x xa*])!(*Suc 0*) ∧
($inouts_v$ *xa* • [*x xa*])!(*Suc 0*) < *max-door-open-time* ∧
(($inouts_v$ *xa* • [*x xa*])!*3* = *0* ∨ ($inouts_v$ *xa* • [*x xa*])!*3* = *1*)) ⟶
ok_v''' ∧
(∀ *xa*. *length*($inouts_v'''$ *xa*) = *2* ∧
(*hd* ($inouts_v$ *xa* • [*x xa*]) = *1* ⟶
hd ($inouts_v'''$ *xa*) = *0* ∧ *hd* (*tl* ($inouts_v'''$ *xa*)) = *0*))
assume *a2*: ok_v''' ⟶
ok_v' ∧
(∀ *xa*. *length*($inouts_v'''$ *xa*) = *2* ∧
length($inouts_v'$ *xa*) = *Suc 0* ∧
$inouts_v'$ *xa* = *take* (*Suc 0*) ($inouts_v'''$ *xa*) • *drop* (*Suc* (*Suc 0*)) ($inouts_v'''$ *xa*) ∧
$inouts_v'''$ *xa*!(*Suc 0*) = *x xa*)
assume *a3*: ∀ *x*. (*hd* ($inouts_v$ *x*) = *0* ∨ *hd* ($inouts_v$ *x*) = *1*) ∧
0 < $inouts_v$ *x*!(*Suc 0*) ∧
$inouts_v$ *x*!(*Suc 0*) < *max-door-open-time* ∧
($inouts_v$ *x*!*3* = *0* ∨ $inouts_v$ *x*!*3* = *1*)
assume *a4*: ∀ *xa*. *length*($inouts_v$ *xa*) = *4* ∧
length($inouts_v''$ *xa*) = *5* ∧
$inouts_v''$ *xa* = *take 4* ($inouts_v$ *xa*) • *x xa* # *drop 4* ($inouts_v$ *xa*)
from *a4* **have** *1*: ∀ *xa*. *length*($inouts_v$ *xa*) = *4*
by *blast*
have *2*: (∀ *xa*. (((*hd* ($inouts_v$ *xa* • [*x xa*]) = *0* ∨ *hd* ($inouts_v$ *xa* • [*x xa*]) = *1*) ∧
0 < ($inouts_v$ *xa* • [*x xa*])!(*Suc 0*) ∧
($inouts_v$ *xa* • [*x xa*])!(*Suc 0*) < *max-door-open-time* ∧
(($inouts_v$ *xa* • [*x xa*])!*3* = *0* ∨ ($inouts_v$ *xa* • [*x xa*])!*3* = *1*))
= ((*hd* ($inouts_v$ *xa*) = *0* ∨ *hd* ($inouts_v$ *xa*) = *1*) ∧
0 < $inouts_v$ *xa*!(*Suc 0*) ∧
$inouts_v$ *xa*!(*Suc 0*) < *max-door-open-time* ∧
($inouts_v$ *xa*!*3* = *0* ∨ $inouts_v$ *xa*!*3* = *1*))))
using *1*
by (*metis Suc-mono Suc-numeral hd-append2 length-greater-0-conv nth-append numeral-2-eq-2*
numeral-3-eq-3 semiring-norm(*2*) *semiring-norm*(*8*) *zero-less-Suc*)
have *3*: ok_v'''
using *2 a3 a1* **by** *simp*
have *4*: (∀ *xa*. *length*($inouts_v'''$ *xa*) = *2* ∧
(*hd* ($inouts_v$ *xa*) = *1* ⟶
hd ($inouts_v'''$ *xa*) = *0* ∧ *hd* (*tl* ($inouts_v'''$ *xa*)) = *0*))
using *1 2 a3 a1* **by** (*smt hd-append2 list.size*(*3*) *zero-neq-numeral*)
have *5*: ∀ *xa*. $inouts_v'$ *xa* = [*hd* ($inouts_v'''$ *xa*)]
using *3 a2* **by** (*metis append-eq-conv-conj length-Cons list.size*(*3*) *list-equal-size2 self-append-conv*)
show ok_v' ∧ (∀ *x*. *length*($inouts_v'$ *x*) = *Suc 0* ∧ (*hd* ($inouts_v$ *x*) = *1* ⟶ *hd* ($inouts_v'$ *x*) = *0*))
apply (*rule conjI*)
using *3 a2* **apply** *blast*

```
    apply (rule allI)
    apply (rule conjI)
    using 3 a2 apply blast
    using 3 a2 4 by (simp add: 5)
  qed
qed
```

Finally, the requirement is held for the *post-landing-finalize-1* because of transitivity of refinement relation.

```
lemma req-04:
  req-04-contract ⊑ post-landing-finalize-1
  apply (simp only: post-landing-finalize-1-simp)
  using req-04-fd-ref req-04-ref by auto

end
```

References

[1] MathWorks, "Simulink." [Online]. Available: https://uk.mathworks.com/products/simulink.html

[2] OSMC, "Openmodelica." [Online]. Available: https://openmodelica.org/

[3] R. D. Arthan, P. Caseley, C. O'Halloran, and A. Smith, "Clawz: Control laws in Z," in *3rd IEEE International Conference on Formal Engineering Methods, ICFEM 2000, York, England, UK, September 4-7, 2000, Proceedings*. IEEE Computer Society, 2000, pp. 169–176.

[4] P. Roy and N. Shankar, "Simcheck: a contract type system for simulink," *Innovations in Systems and Software Engineering*, vol. 7, no. 2, p. 73, Jun. 2011. [Online]. Available: http://dx.doi.org/10.1007/s11334-011-0145-4

[5] P. Boström and J. Wiik, "Contract-based verification of discrete-time multi-rate simulink models," *Software and System Modeling*, vol. 15, no. 4, pp. 1141–1161, 2016.

[6] P. Caspi, A. Curic, A. Maignan, C. Sofronis, and S. Tripakis, "Translating discrete-time simulink to lustre," in *Embedded Software, Third International Conference, EMSOFT 2003, Philadelphia, PA, USA, October 13-15, 2003, Proceedings*, ser. Lecture Notes in Computer Science, R. Alur and I. Lee, Eds., vol. 2855. Springer, 2003, pp. 84–99.

[7] A. Cavalcanti, P. Clayton, and C. O'Halloran, "Control law diagrams in *Circus*," in *FM 2005: Formal Methods, International Symposium of Formal Methods Europe, Newcastle, UK, July 18-22, 2005, Proceedings*, ser. Lecture Notes in Computer Science, J. S. Fitzgerald, I. J. Hayes, and A. Tarlecki, Eds., vol. 3582. Springer, 2005, pp. 253–268.

[8] V. Preoteasa, I. Dragomir, and S. Tripakis, "The refinement calculus of reactive systems," *CoRR*, vol. abs/1710.03979, 2017. [Online]. Available: http://arxiv.org/abs/1710.03979

[9] F. Zeyda, J. Ouy, S. Foster, and A. Cavalcanti, "Formalising cosimulation models," *Software Engineering and Formal Methods*, Jan. 2018. [Online]. Available: http://dx.doi.org/10.1007/978-3-319-74781-1_31

[10] B. Meyer, "Applying "design by contract"," *IEEE Computer*, vol. 25, no. 10, pp. 40–51, 1992.

[11] C. B. Jones, *Wanted: a compositional approach to concurrency*. New York, NY: Springer New York, 2003, pp. 5–15. [Online]. Available: https://doi.org/10.1007/978-0-387-21798-7_1

[12] S. S. Bauer, A. David, R. Hennicker, K. G. Larsen, A. Legay, U. Nyman, and A. Wasowski, "Moving from specifications to contracts in component-based design," in *Fundamental Approaches to Software Engineering - 15th International Conference, FASE 2012, Held as Part of the European Joint Conferences on Theory and Practice of Software, ETAPS 2012, Tallinn, Estonia, March 24 - April 1, 2012. Proceedings*, ser. Lecture Notes in Computer Science, J. de Lara and A. Zisman, Eds., vol. 7212. Springer, 2012, pp. 43–58.

[13] S. Tripakis, C. Sofronis, P. Caspi, and A. Curic, "Translating discrete-time simulink to lustre," *ACM Trans. Embedded Comput. Syst.*, vol. 4, no. 4, pp. 779–818, 2005.

[14] J. Woodcock and A. Cavalcanti, "A tutorial introduction to designs in unifying theories of programming," in *Integrated Formal Methods*, E. A. Boiten, J. Derrick, and G. Smith, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2004, pp. 40–66.

[15] C. Hoare and J. He, *Unifying theories of programming.* Prentice Hall, 1998, vol. 14.

[16] T. Nipkow, L. C. Paulson, and M. Wenzel, *Isabelle/HOL - A Proof Assistant for Higher-Order Logic*, ser. Lecture Notes in Computer Science. Springer, 2002, vol. 2283.

[17] S. Foster, F. Zeyda, and J. Woodcock, "Isabelle/utp: A mechanised theory engineering framework," in *Unifying Theories of Programming - 5th International Symposium, UTP 2014, Singapore, May 13, 2014, Revised Selected Papers*, ser. Lecture Notes in Computer Science, D. Naumann, Ed., vol. 8963. Springer, 2014, pp. 21–41.

[18] M. Oliveira, A. Cavalcanti, and J. Woodcock, "A UTP Semantics for Circus," *Formal Asp. Comput.*, vol. 21, no. 1-2, pp. 3–32, 2009.

[19] J.-R. Abrial, *The B-book: assigning programs to meanings.* Cambridge University Press, 2005.

[20] J. M. Spivey, *The Z Notation: A Reference Manual*, ser. Prentice Hall International Series in Computer Science. Prentice Hall, 1989.

[21] N. Marian and Y. Ma, *Translation of Simulink Models to Component-based Software Models.* Forlag uden navn, 2007, pp. 274–280.

[22] A. Cavalcanti, A. Mota, and J. Woodcock, "Simulink timed models for program verification," in *Theories of Programming and Formal Methods - Essays Dedicated to Jifeng He on the Occasion of His 70th Birthday*, ser. Lecture Notes in Computer Science, Z. Liu, J. Woodcock, and H. Zhu, Eds., vol. 8051. Springer, 2013, pp. 82–99.

[23] A. Cavalcanti and J. Woodcock, "A tutorial introduction to CSP in *Unifying Theories of Programming*," in *Refinement Techniques in Software Engineering, First Pernambuco Summer School on Software Engineering, PSSE 2004, Recife, Brazil, November 23-December 5, 2004, Revised Lectures*, ser. Lecture Notes in Computer Science, A. Cavalcanti, A. Sampaio, and J. Woodcock, Eds., vol. 3167. Springer, 2004, pp. 220–268.

[24] C. A. R. Hoare and A. W. Roscoe, "Programs as Executable Predicates," in *FGCS*, 1984, pp. 220–228.

[25] V. Preoteasa and S. Tripakis, "Refinement calculus of reactive systems," *CoRR*, vol. abs/1406.6035, 2014. [Online]. Available: http://arxiv.org/abs/1406.6035

[26] S. Foster, A. Cavalcanti, S. Canham, J. Woodcock, and F. Zeyda, "Unifying theories of reactive design contracts," *In preparation for Theoretical Computer Science*, vol. abs/1712.10233, 2017.

[27] I. Dragomir, V. Preoteasa, and S. Tripakis, "Compositional semantics and analysis of hierarchical block diagrams," in *Model Checking Software - 23rd International Symposium, SPIN 2016, Co-located with ETAPS 2016, Eindhoven, The Netherlands, April 7-8, 2016, Proceedings*, ser. Lecture Notes in Computer Science, D. Bosnacki and A. Wijs, Eds., vol. 9641. Springer, 2016, pp. 38–56.

[28] D. Bhatt, A. Chattopadhyay, W. Li, D. Oglesby, S. Owre, and N. Shankar, "Contract-based verification of complex time-dependent behaviors in avionic systems," in *NASA Formal Methods - 8th International Symposium, NFM 2016, Minneapolis, MN, USA, June 7-9, 2016, Proceedings*, ser. Lecture Notes in Computer Science, S. Rayadurgam and O. Tkachuk, Eds., vol. 9690. Springer, 2016, pp. 34–40.

[29] VeTSS, "Uk research institute in verified trustworthy software systems." [Online]. Available: https://vetss.org.uk/